

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P763926

Luminaire Tested: LD6D30D010-EU6DR2015309040-6LBCSSQMMS

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P763926  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-36)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D30D010-EU6DR2015309040-6LBCSSQMMS  
Description: 6 INCH SQAURE SHALLOW CAST MATTE METALLIC SILVER TRIM, WITH 20° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 3424.2 lumens  
Efficiency: N/A  
Efficacy: 118.1 lumens/watt  
Spacing Criteria (0/90/45): 0.34 / 0.34 / 0.36  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 29  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P763926

CATALOG NUMBER: LD6D30D010-EU6DR2015309040-6LBCSSQMMS

### Luminous Intensity Polar Plot

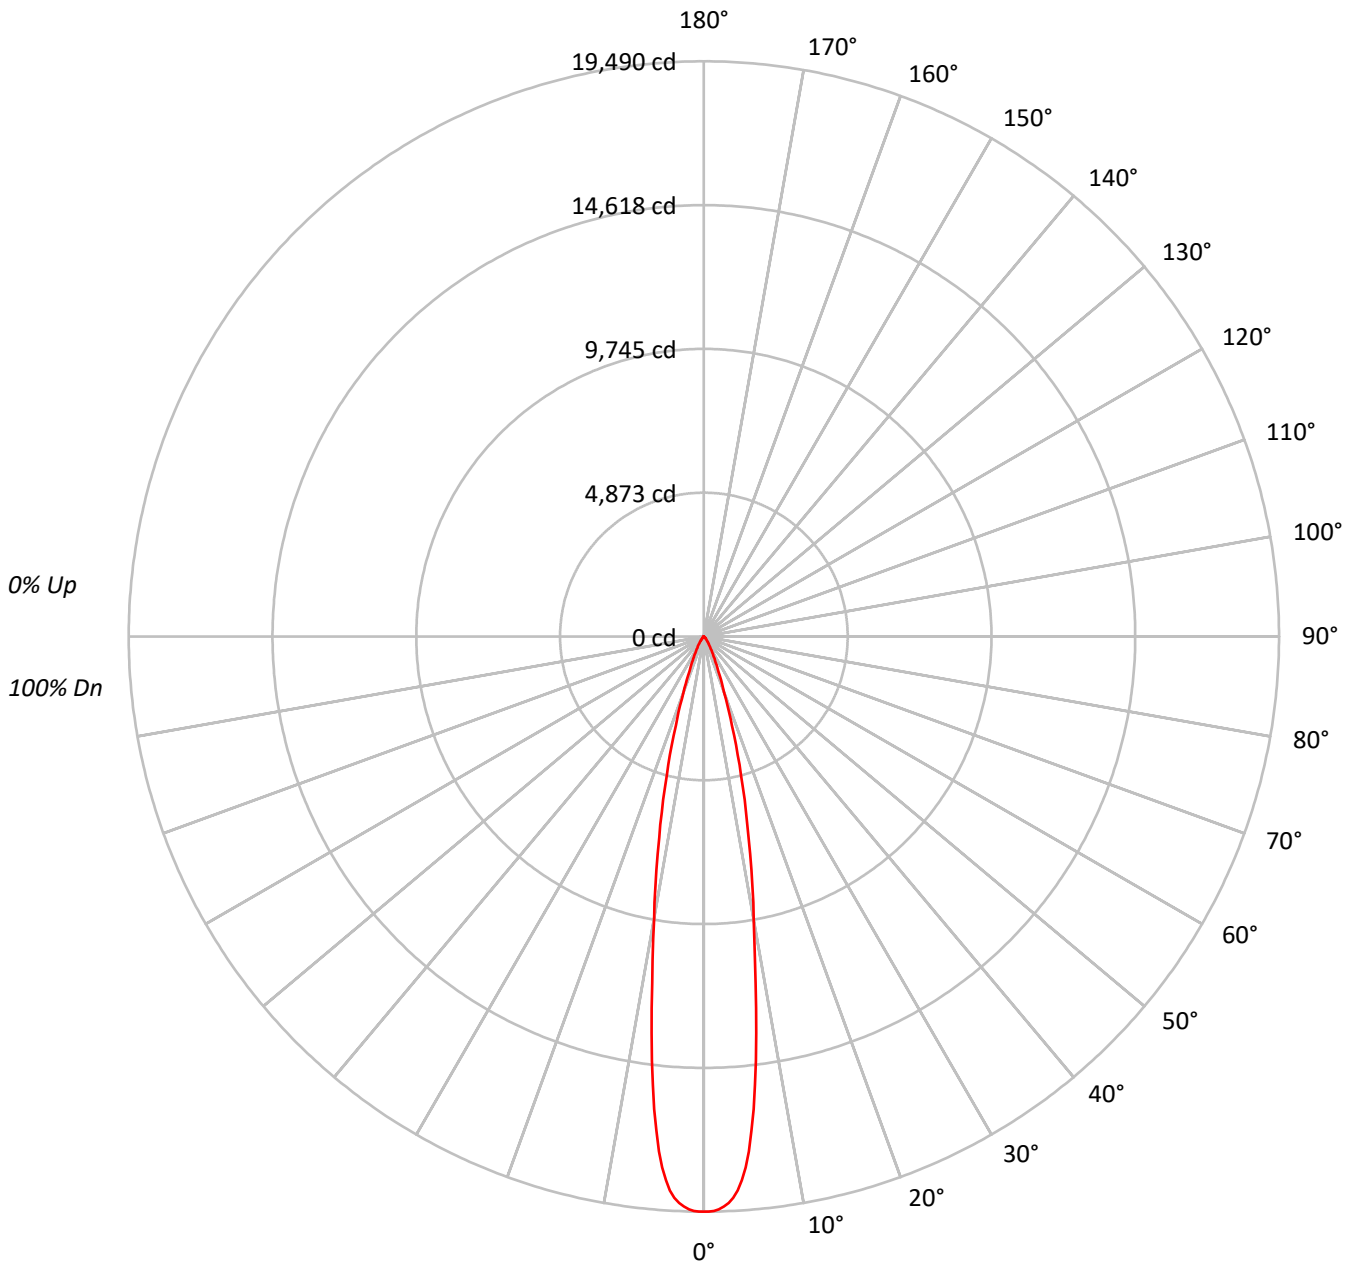



TEST NUMBER: P763926

CATALOG NUMBER: LD6D30D010-EU6DR2015309040-6LBCSSQMMS

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR	0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100	100	100													
	1	115	113	111	109	113	111	109	108	107	106	104	103	102	101	100	99	98	97	97	97	97	97	97													
	2	111	108	105	102	109	106	104	101	103	101	99	100	99	97	98	96	95	94	94	94	94	94	94													
	3	108	103	100	97	106	102	99	96	100	97	95	97	95	93	95	93	92	91	91	91	91	91	91													
	4	105	99	96	93	103	98	95	92	96	93	91	95	92	90	93	91	89	88	88	88	88	88	88													
	5	102	96	92	89	100	95	91	89	94	90	88	92	89	87	91	88	86	85	85	85	85	85	85													
	6	99	93	89	86	98	92	88	86	91	87	85	90	87	84	88	86	84	83	83	83	83	83	83													
	7	96	90	86	83	95	89	86	83	88	85	82	87	84	82	86	84	82	81	81	81	81	81	81													
	8	94	87	83	81	93	87	83	80	86	83	80	85	82	80	84	82	80	79	79	79	79	79	79													
	9	91	85	81	78	91	85	81	78	84	80	78	83	80	78	82	80	78	77	77	77	77	77	77													
	10	89	83	79	76	88	82	79	76	82	78	76	81	78	76	81	78	76	75	75	75	75	75	75													

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	2129459
5°	1921177
10°	1078265
15°	548099
20°	232057
25°	107126
30°	56710
35°	30558
40°	16331
45°	9657
50°	5609
55°	2972
60°	1901
65°	1344
70°	543
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 9657 cd/sqm



TEST NUMBER: P763926

CATALOG NUMBER: LD6D30D010-EU6DR2015309040-6LBCSSQMMS

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	1387.6	40.5
10°-20°	1366.4	39.9
20°-30°	446.4	13.0
30°-40°	152.0	4.4
40°-50°	51.1	1.5
50°-60°	15.4	0.4
60°-70°	5.1	0.1
70°-80°	0.2	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3200.4	93.5
0°-40°	3352.4	97.9
0°-60°	3418.9	99.8
0°-90°	3424.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3424.2	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	19490	
5°	17516	###
15°	4846	1366
25°	889	446
35°	229	152
45°	62	51
55°	16	15
65°	5	5
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P763926

CATALOG NUMBER: LD6D30D010-EU6DR2015309040-6LBCSSQMMS

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	19489.7
0.5°	19489.7
1°	19465.4
1.5°	19416.8
2°	19328.3
2.5°	19210.3
3°	19043.7
3.5°	18811.1
4°	18465.8
4.5°	18045.8
5°	17516.5
5.5°	16820.5
6°	16107.2
6.5°	15289.8
7°	14489.7
7.5°	13552.6
8°	12716.1
8.5°	11874.3
9°	11096.8
9.5°	10383.5
10°	9718.8
12.5°	6978.5
15°	4845.5
17.5°	3165.6
20°	1995.8
22.5°	1293.0
25°	888.6
27.5°	624.8
30°	449.5
32.5°	322.8
35°	229.1
37.5°	159.7
40°	114.5
42.5°	83.3
45°	62.5
47.5°	48.6
50°	33.0
52.5°	20.8
55°	15.6
57.5°	12.1
60°	8.7
62.5°	6.9
65°	5.2



TEST NUMBER: P763926  
CATALOG NUMBER: LD6D30D010-EU6DR2015309040-6LBCSSQMMS

**CANDELA DISTRIBUTION (continued):**

	0°
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





67.5°		3.5
70°		1.7

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)