

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P766757

Luminaire Tested: LD6D45BD010-EU6DR5040509050-6LBSQW1B

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P766757
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-44)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D45BD010-EU6DR5040509050-6LBSQW1B
Description: 6 INCH SQAURE DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 50° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 4728.2 lumens
Efficiency: N/A
Efficacy: 122.2 lumens/watt
Spacing Criteria (0/90/45): 0.8 / 0.8 / 0.73
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 38.7
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P766757
CATALOG NUMBER: LD6D45BD010-EU6DR5040509050-6LBSQW1B

Luminous Intensity Polar Plot

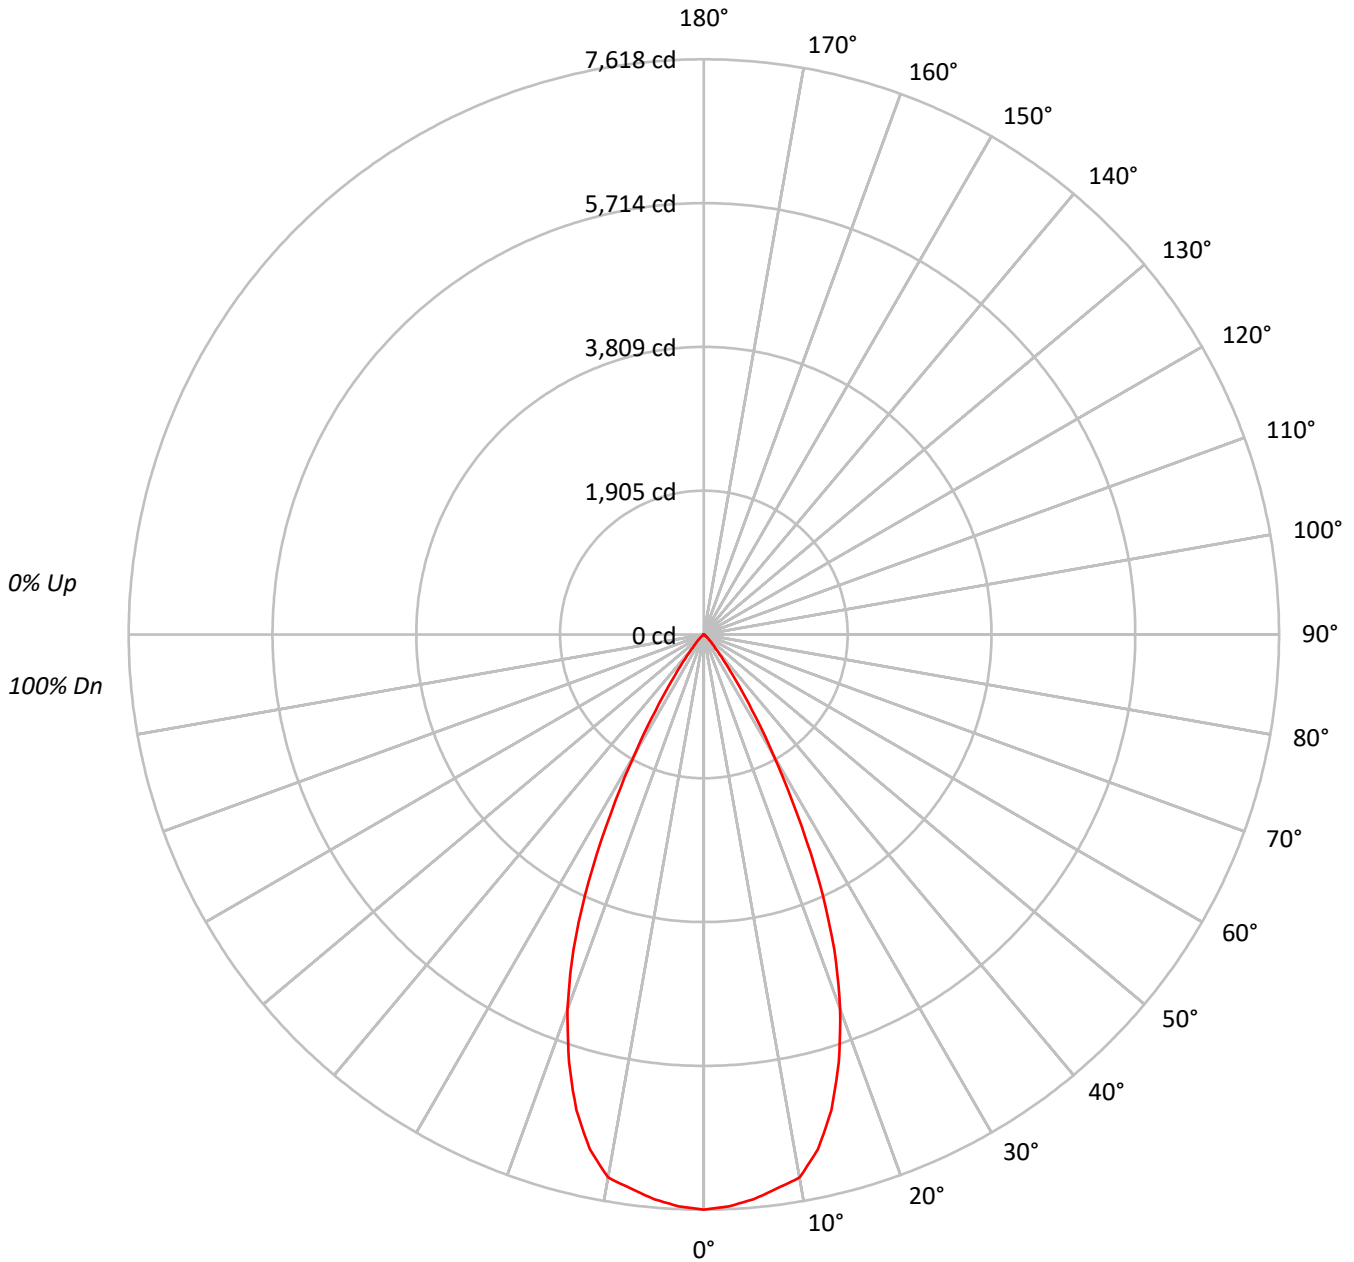



TEST NUMBER: P766757

CATALOG NUMBER: LD6D45BD010-EU6DR5040509050-6LBSQW1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20				
RC	80					70					50					30				
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	114	112	109	107	112	110	108	106	106	104	102	102	101	99	98	97	97	95		
2	109	105	101	98	107	103	100	97	100	98	95	97	95	93	95	93	91	90		
3	105	99	95	91	103	98	94	90	95	92	89	93	90	88	91	88	86	85		
4	100	94	89	85	99	93	88	85	90	87	84	89	85	83	87	84	82	80		
5	96	89	84	80	95	88	83	79	86	82	79	85	81	78	83	80	77	76		
6	92	84	79	75	91	83	79	75	82	78	74	81	77	74	79	76	74	72		
7	88	80	75	71	87	79	74	71	78	74	71	77	73	70	76	73	70	69		
8	85	76	71	67	84	76	71	67	75	70	67	74	70	67	73	69	66	65		
9	81	73	68	64	80	72	67	64	71	67	64	71	67	64	70	66	63	62		
10	78	70	64	61	77	69	64	61	68	64	61	68	64	61	67	63	60	59		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	832403
5°	823672
10°	810108
15°	737669
20°	613828
25°	435725
30°	230627
35°	93981
40°	34902
45°	15977
50°	6544
55°	3429
60°	1683
65°	491
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 15977 cd/sqm



TEST NUMBER: P766757

CATALOG NUMBER: LD6D45BD010-EU6DR5040509050-6LBSQW1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	709.8	15.0
10°-20°	1793.9	37.9
20°-30°	1611.4	34.1
30°-40°	504.5	10.7
40°-50°	88.3	1.9
50°-60°	17.6	0.4
60°-70°	2.6	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4115.2	87.0
0°-40°	4619.7	97.7
0°-60°	4725.6	99.9
0°-90°	4728.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4728.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	7618	
5°	7510	710
15°	6521	1794
25°	3614	1611
35°	705	505
45°	103	88
55°	18	18
65°	2	3
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P766757

CATALOG NUMBER: LD6D45BD010-EU6DR5040509050-6LBSQW1B

CANDELA DISTRIBUTION (FULL):

	0°
0°	7618.5
2.5°	7580.6
5°	7509.9
7.5°	7402.0
10°	7301.8
12.5°	6980.7
15°	6521.4
17.5°	5938.2
20°	5279.2
22.5°	4516.7
25°	3614.3
27.5°	2657.2
30°	1828.0
32.5°	1190.2
35°	704.6
37.5°	404.7
40°	244.7
42.5°	159.3
45°	103.4
47.5°	62.9
50°	38.5
52.5°	26.3
55°	18.0
57.5°	12.2
60°	7.7
62.5°	4.5
65°	1.9
67.5°	0.6
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)