

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P757924

Luminaire Tested: LD6D05D010-EU6DR150210IC9027-6LBSQW1MW

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P757924
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-21)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D05D010-EU6DR150210IC9027-6LBSQW1MW
Description: 6 INCH SQAURE DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 15° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 587.1 lumens
Efficiency: N/A
Efficacy: 78.3 lumens/watt
Spacing Criteria (0/90/45): 0.22 / 0.22 / 0.23
Luminous Opening: Vertical Cylinder (Dia: 0.35' x H: 0.35')
CIE Type: Direct

Input Watts (W): 7.5
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P757924

CATALOG NUMBER: LD6D05D010-EU6DR150210IC9027-6LBSQW1MW

Luminous Intensity Polar Plot

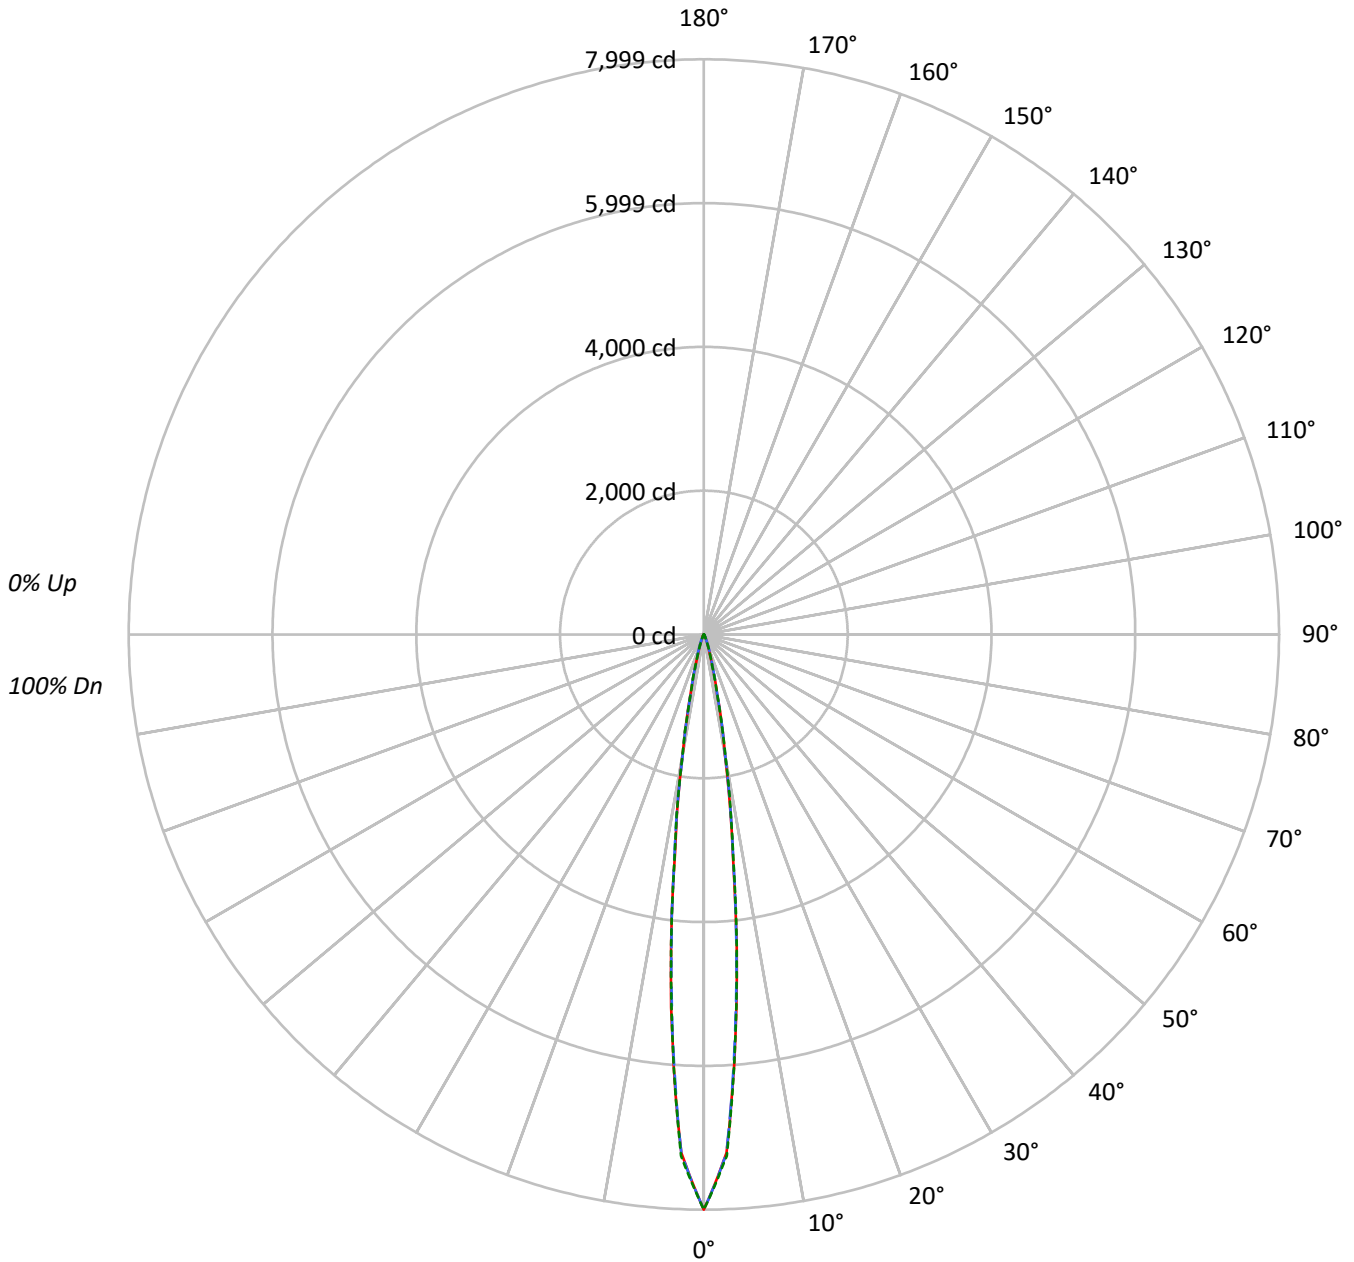



TEST NUMBER: P757924

CATALOG NUMBER: LD6D05D010-EU6DR150210IC9027-6LBSQW1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	116	114	112	111	113	112	110	109	108	107	106	104	103	103	101	100	100	98																			
2	113	110	107	105	111	108	106	104	105	103	102	102	101	100	100	98	98	96																			
3	110	106	103	101	108	105	102	100	103	100	99	100	99	97	98	97	96	94																			
4	108	103	100	98	106	102	99	97	100	98	96	99	97	95	97	95	94	93																			
5	106	101	98	95	104	100	97	95	98	96	94	97	95	93	96	94	92	92																			
6	104	99	95	93	102	98	95	93	97	94	92	96	93	92	95	93	91	90																			
7	102	97	94	91	101	96	93	91	95	93	91	94	92	90	93	91	90	89																			
8	100	95	92	90	99	95	92	90	94	91	89	93	91	89	92	90	89	88																			
9	99	93	90	88	98	93	90	88	92	90	88	92	89	88	91	89	88	87																			
10	97	92	89	87	96	92	89	87	91	89	87	91	88	87	90	88	86	86																			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	900058	900058	900058
5°	528917	522068	526194
10°	157858	158959	161394
15°	39268	40032	38790
20°	11750	13607	11995
25°	4144	5274	4191
30°	1520	2007	1550
35°	763	864	741
40°	483	526	483
45°	357	378	357
50°	285	285	285
55°	237	237	237
60°	190	190	190
65°	143	143	143
70°	124	124	124
75°	76	76	106
80°	55	55	55
85°	25	25	25

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 45°

Vertical Angle: 45°

Luminance: 378 cd/sqm



TEST NUMBER: P757924

CATALOG NUMBER: LD6D05D010-EU6DR150210IC9027-6LBSQW1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	380.8	64.9
10°-20°	156.6	26.7
20°-30°	31.1	5.3
30°-40°	7.8	1.3
40°-50°	4.1	0.7
50°-60°	3.0	0.5
60°-70°	2.1	0.4
70°-80°	1.2	0.2
80°-90°	0.4	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	568.5	96.8
0°-40°	576.3	98.2
0°-60°	583.4	99.4
0°-90°	587.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	587.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	7999	7999	7999	7999	7999	
5°	5204	5151	5137	5172	5178	380
15°	452	460	461	453	447	155
25°	53	60	68	60	54	28
35°	10	11	12	11	10	7
45°	5	5	5	5	5	4
55°	3	3	3	3	3	3
65°	2	2	2	2	2	2
75°	1	1	1	1	1	1
85°	0	0	0	0	0	0
90°	0	0	0	0	0	0



TEST NUMBER: P757924

CATALOG NUMBER: LD6D05D010-EU6DR150210IC9027-6LBSQW1MW

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	7999.1	7999.1	7999.1	7999.1	7999.1
2.5°	7215.5	7221.6	7223.9	7231.1	7257.5
5°	5204.4	5150.9	5137.0	5172.5	5177.6
7.5°	3082.9	3093.7	3133.3	3142.1	3110.3
10°	1691.8	1705.7	1703.6	1715.8	1729.7
12.5°	865.2	854.4	851.0	864.9	845.6
15°	452.1	460.5	460.9	452.7	446.6
17.5°	243.1	253.0	269.2	256.0	235.7
20°	143.6	152.4	166.3	155.4	146.6
22.5°	88.7	95.8	105.7	97.2	90.1
25°	53.2	60.3	67.7	59.9	53.8
27.5°	31.5	37.6	42.3	37.2	31.2
30°	20.3	23.7	26.8	23.4	20.7
32.5°	14.2	15.6	16.9	15.6	14.2
35°	10.5	11.2	11.9	11.2	10.2
37.5°	8.1	8.8	9.1	8.5	7.8
40°	6.8	7.1	7.4	7.1	6.8
42.5°	5.8	6.1	6.1	6.1	5.8
45°	5.1	5.1	5.4	5.1	5.1
47.5°	4.4	4.4	4.7	4.4	4.4
50°	4.1	4.1	4.1	4.1	4.1
52.5°	3.7	3.7	3.7	3.7	3.7
55°	3.4	3.4	3.4	3.4	3.4
57.5°	3.0	3.0	3.0	3.0	3.0
60°	2.7	2.7	2.7	2.7	2.7
62.5°	2.4	2.4	2.4	2.4	2.4
65°	2.0	2.0	2.0	2.0	2.0
67.5°	2.0	2.0	2.0	2.0	2.0
70°	1.7	1.7	1.7	1.7	1.7
72.5°	1.4	1.4	1.4	1.4	1.4
75°	1.0	1.0	1.0	1.0	1.4
77.5°	1.0	1.0	1.0	1.0	1.0
80°	0.7	0.7	0.7	0.7	0.7
82.5°	0.7	0.7	0.7	0.7	0.7
85°	0.3	0.3	0.3	0.3	0.3
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180° - - 45°-225° - - - 90°-270°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)