

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P768488

Luminaire Tested: LD6D55D010-EU6DR6555659027-6LBCSSQMB

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P768488
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D55D010-EU6DR6555659027-6LBCSSQMB
Description: 6 INCH SQAURE SHALLOW CAST MATTE BLACK TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5561.5 lumens
Efficiency: N/A
Efficacy: 95.6 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96
Luminous Opening: Circular (Dia: 0.48' x H: 0')
CIE Type: Direct

Input Watts (W): 58.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P768488
CATALOG NUMBER: LD6D55D010-EU6DR6555659027-6LBCSSQMB

Luminous Intensity Polar Plot

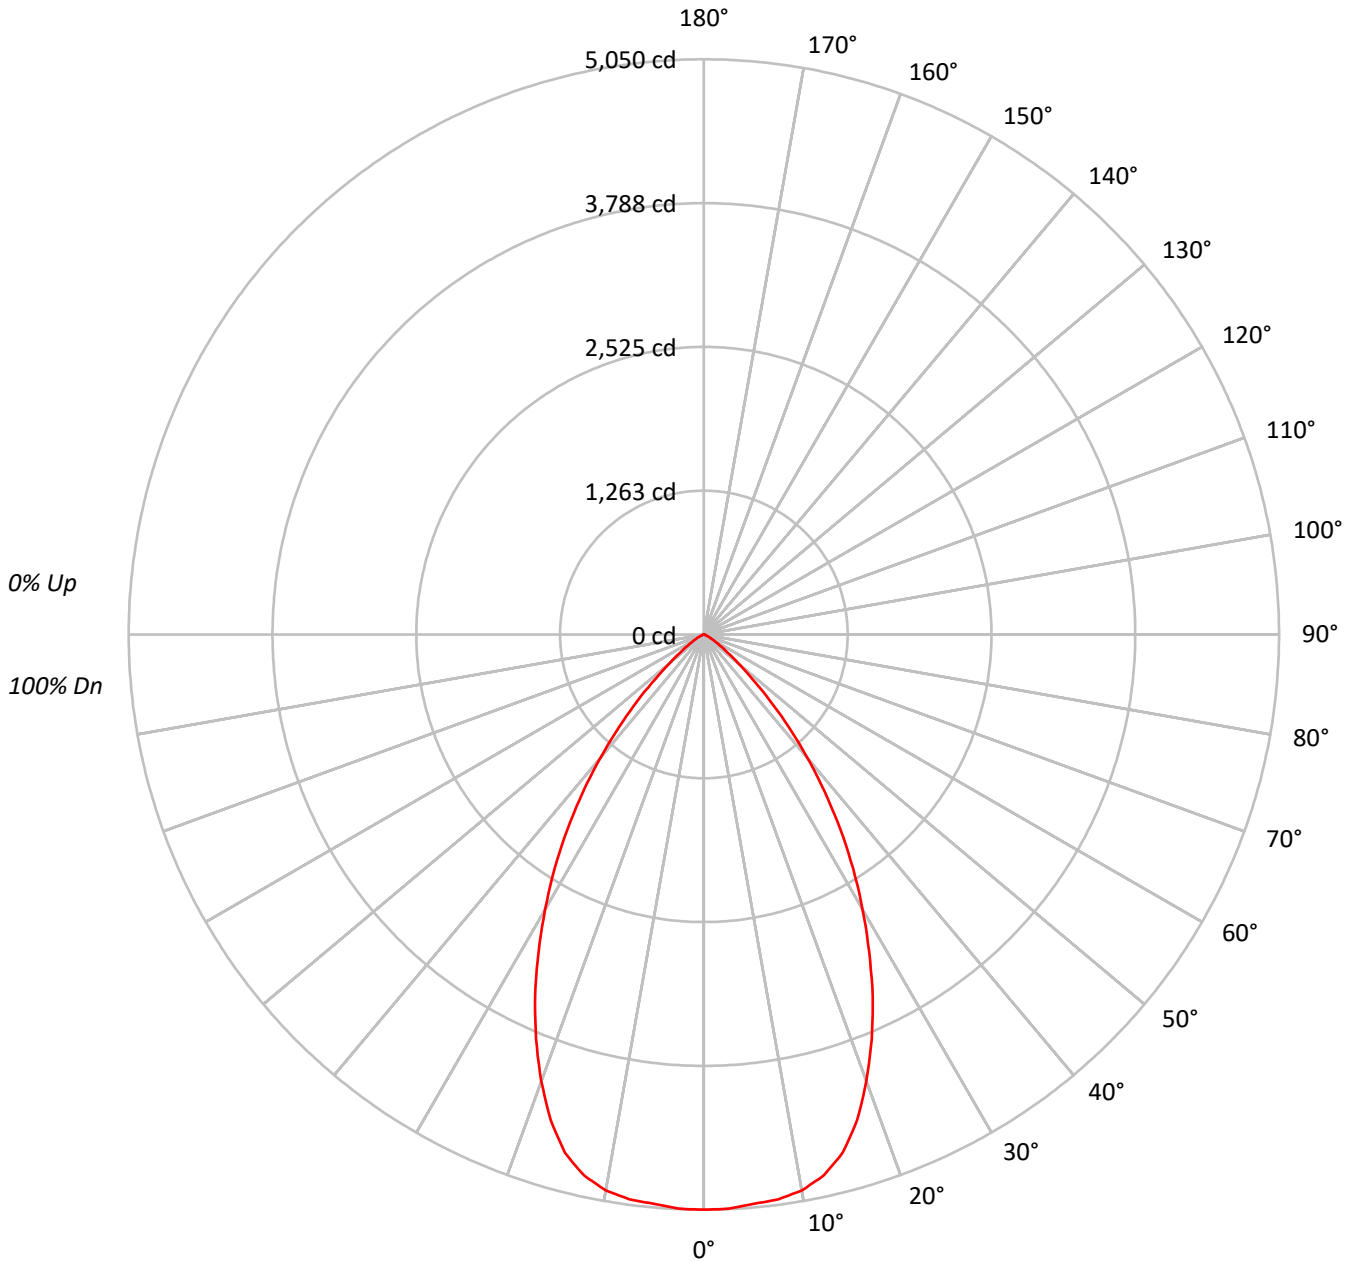



TEST NUMBER: P768488
 CATALOG NUMBER: LD6D55D010-EU6DR6555659027-6LBCSSQMB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93																			
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85																			
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78																			
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72																			
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66																			
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61																			
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56																			
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52																			
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49																			
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	46																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	294922
5°	294178
10°	293927
15°	284865
20°	259336
25°	225990
30°	187959
35°	148934
40°	107492
45°	67910
50°	35399
55°	18817
60°	9882
65°	5431
70°	2288
75°	2505
80°	1749
85°	1474

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 67910 cd/sqm



TEST NUMBER: P768488

CATALOG NUMBER: LD6D55D010-EU6DR6555659027-6LBCSSQMB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	477.5	8.6
10°-20°	1307.7	23.5
20°-30°	1598.4	28.7
30°-40°	1296.9	23.3
40°-50°	646.3	11.6
50°-60°	180.3	3.2
60°-70°	40.9	0.7
70°-80°	10.7	0.2
80°-90°	2.7	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3383.6	60.8
0°-40°	4680.6	84.2
0°-60°	5507.1	99.0
0°-90°	5561.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5561.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5050	
5°	5018	478
15°	4711	1308
25°	3507	1598
35°	2089	1297
45°	822	646
55°	185	180
65°	39	41
75°	11	11
85°	2	3
90°	0	



TEST NUMBER: P768488

CATALOG NUMBER: LD6D55D010-EU6DR6555659027-6LBCSSQMB

CANDELA DISTRIBUTION (FULL):

	0°
0°	5049.7
2.5°	5046.0
5°	5017.8
7.5°	5001.4
10°	4956.2
12.5°	4864.2
15°	4711.3
17.5°	4472.3
20°	4172.6
22.5°	3849.0
25°	3506.9
27.5°	3141.1
30°	2787.1
32.5°	2437.6
35°	2088.9
37.5°	1740.9
40°	1409.9
42.5°	1099.7
45°	822.2
47.5°	572.9
50°	389.6
52.5°	268.6
55°	184.8
57.5°	124.7
60°	84.6
62.5°	58.6
65°	39.3
67.5°	20.0
70°	13.4
72.5°	12.6
75°	11.1
77.5°	7.4
80°	5.2
82.5°	3.7
85°	2.2
87.5°	1.5
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)