

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P768516

Luminaire Tested: LD6D55D010-EU6DR6555659035-6LBCSSQMW

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P768516
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D55D010-EU6DR6555659035-6LBCSSQMW
Description: 6 INCH SQAURE SHALLOW CAST MATTE WHITE TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5897.9 lumens
Efficiency: N/A
Efficacy: 101.3 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96
Luminous Opening: Circular (Dia: 0.48' x H: 0')
CIE Type: Direct

Input Watts (W): 58.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P768516
CATALOG NUMBER: LD6D55D010-EU6DR6555659035-6LBCSSQMW

Luminous Intensity Polar Plot

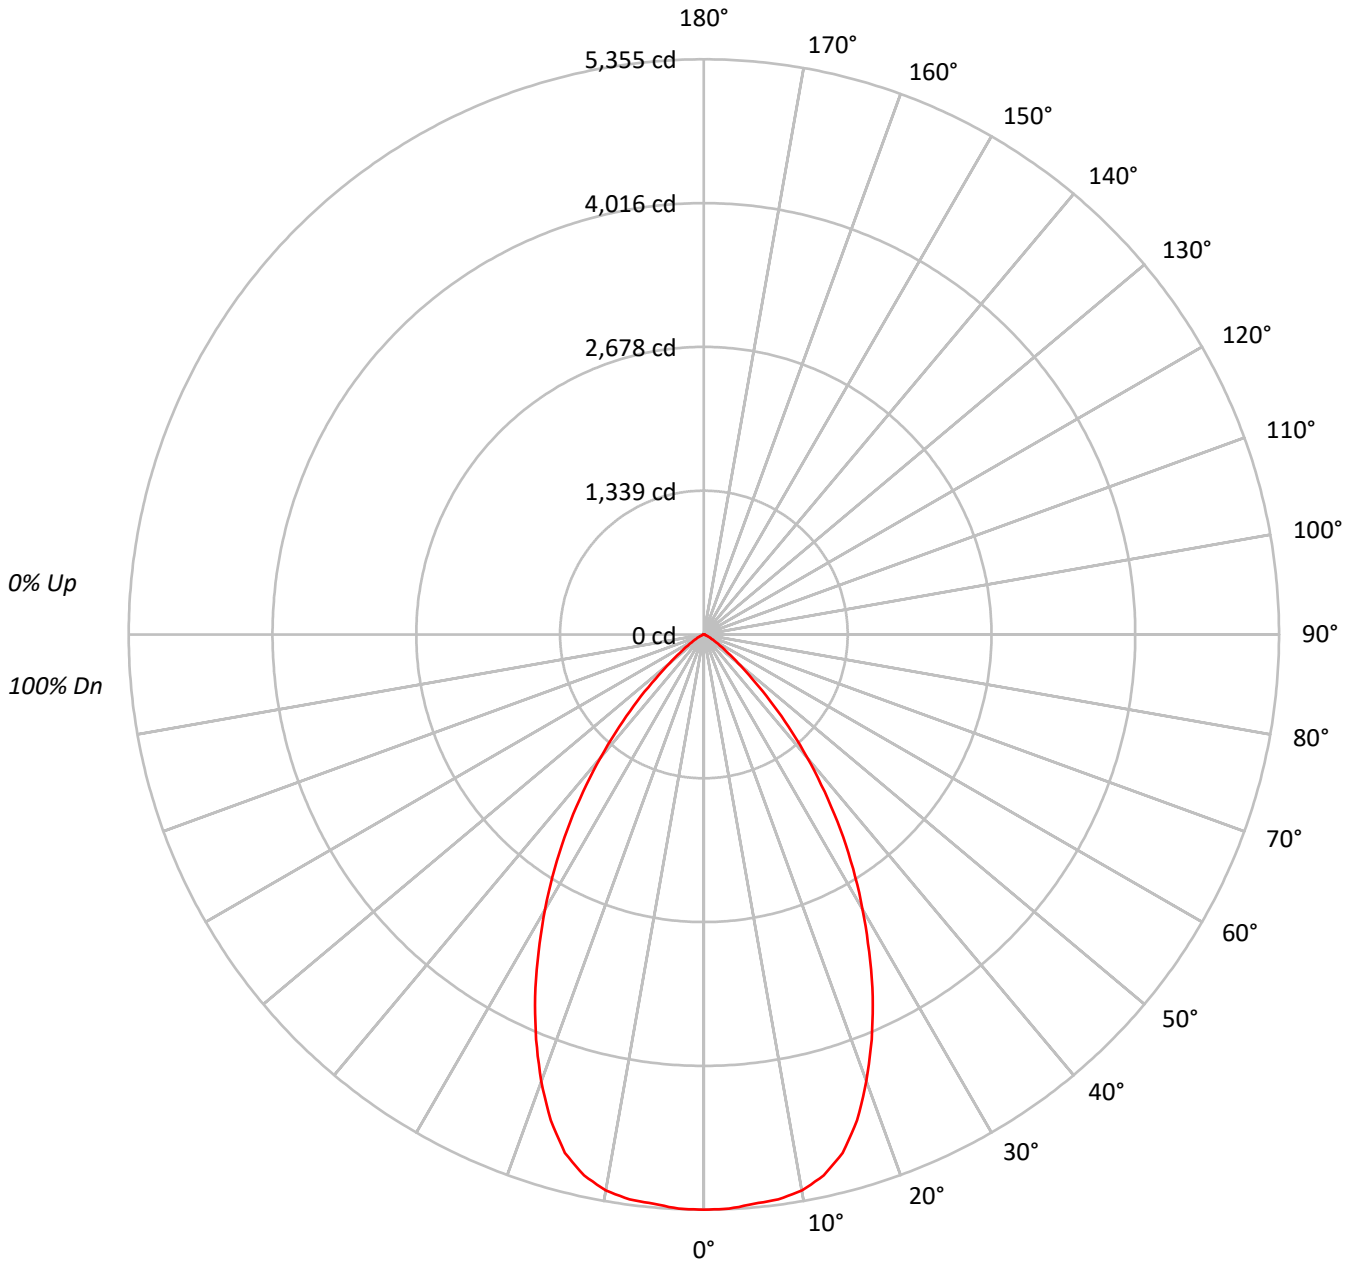



TEST NUMBER: P768516
 CATALOG NUMBER: LD6D55D010-EU6DR6555659035-6LBCSSQMW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93																			
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85																			
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78																			
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72																			
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66																			
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61																			
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56																			
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52																			
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49																			
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	46																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	312764
5°	311972
10°	311706
15°	302097
20°	275023
25°	239665
30°	199336
35°	157946
40°	113995
45°	72015
50°	37534
55°	19947
60°	10478
65°	5763
70°	2425
75°	2663
80°	1850
85°	1608

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 72015 cd/sqm



TEST NUMBER: P768516

CATALOG NUMBER: LD6D55D010-EU6DR6555659035-6LBCSSQMW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	506.4	8.6
10°-20°	1386.8	23.5
20°-30°	1695.1	28.7
30°-40°	1375.4	23.3
40°-50°	685.4	11.6
50°-60°	191.2	3.2
60°-70°	43.4	0.7
70°-80°	11.3	0.2
80°-90°	2.9	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3588.4	60.8
0°-40°	4963.8	84.2
0°-60°	5840.3	99.0
0°-90°	5897.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5897.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5355	
5°	5321	506
15°	4996	1387
25°	3719	1695
35°	2215	1375
45°	872	685
55°	196	191
65°	42	43
75°	12	11
85°	2	3
90°	0	



TEST NUMBER: P768516

CATALOG NUMBER: LD6D55D010-EU6DR6555659035-6LBCSSQMW

CANDELA DISTRIBUTION (FULL):

0°	
0°	5355.2
2.5°	5351.2
5°	5321.3
7.5°	5304.0
10°	5256.0
12.5°	5158.4
15°	4996.3
17.5°	4742.9
20°	4425.0
22.5°	4081.9
25°	3719.1
27.5°	3331.1
30°	2955.8
32.5°	2585.1
35°	2215.3
37.5°	1846.2
40°	1495.2
42.5°	1166.3
45°	871.9
47.5°	607.5
50°	413.1
52.5°	284.9
55°	195.9
57.5°	132.2
60°	89.7
62.5°	62.2
65°	41.7
67.5°	21.2
70°	14.2
72.5°	13.4
75°	11.8
77.5°	7.9
80°	5.5
82.5°	3.9
85°	2.4
87.5°	1.6
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)