

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P769283

Luminaire Tested: LD6D60D010-EU6DR6555659030-6LBCSSQMW

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P769283
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D60D010-EU6DR6555659030-6LBCSSQMW
Description: 6 INCH SQAURE SHALLOW CAST MATTE WHITE TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6418.1 lumens
Efficiency: N/A
Efficacy: 99.7 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96
Luminous Opening: Circular (Dia: 0.48' x H: 0')
CIE Type: Direct


Input Watts (W): 64.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P769283

CATALOG NUMBER: LD6D60D010-EU6DR6555659030-6LBCSSQMW

Luminous Intensity Polar Plot

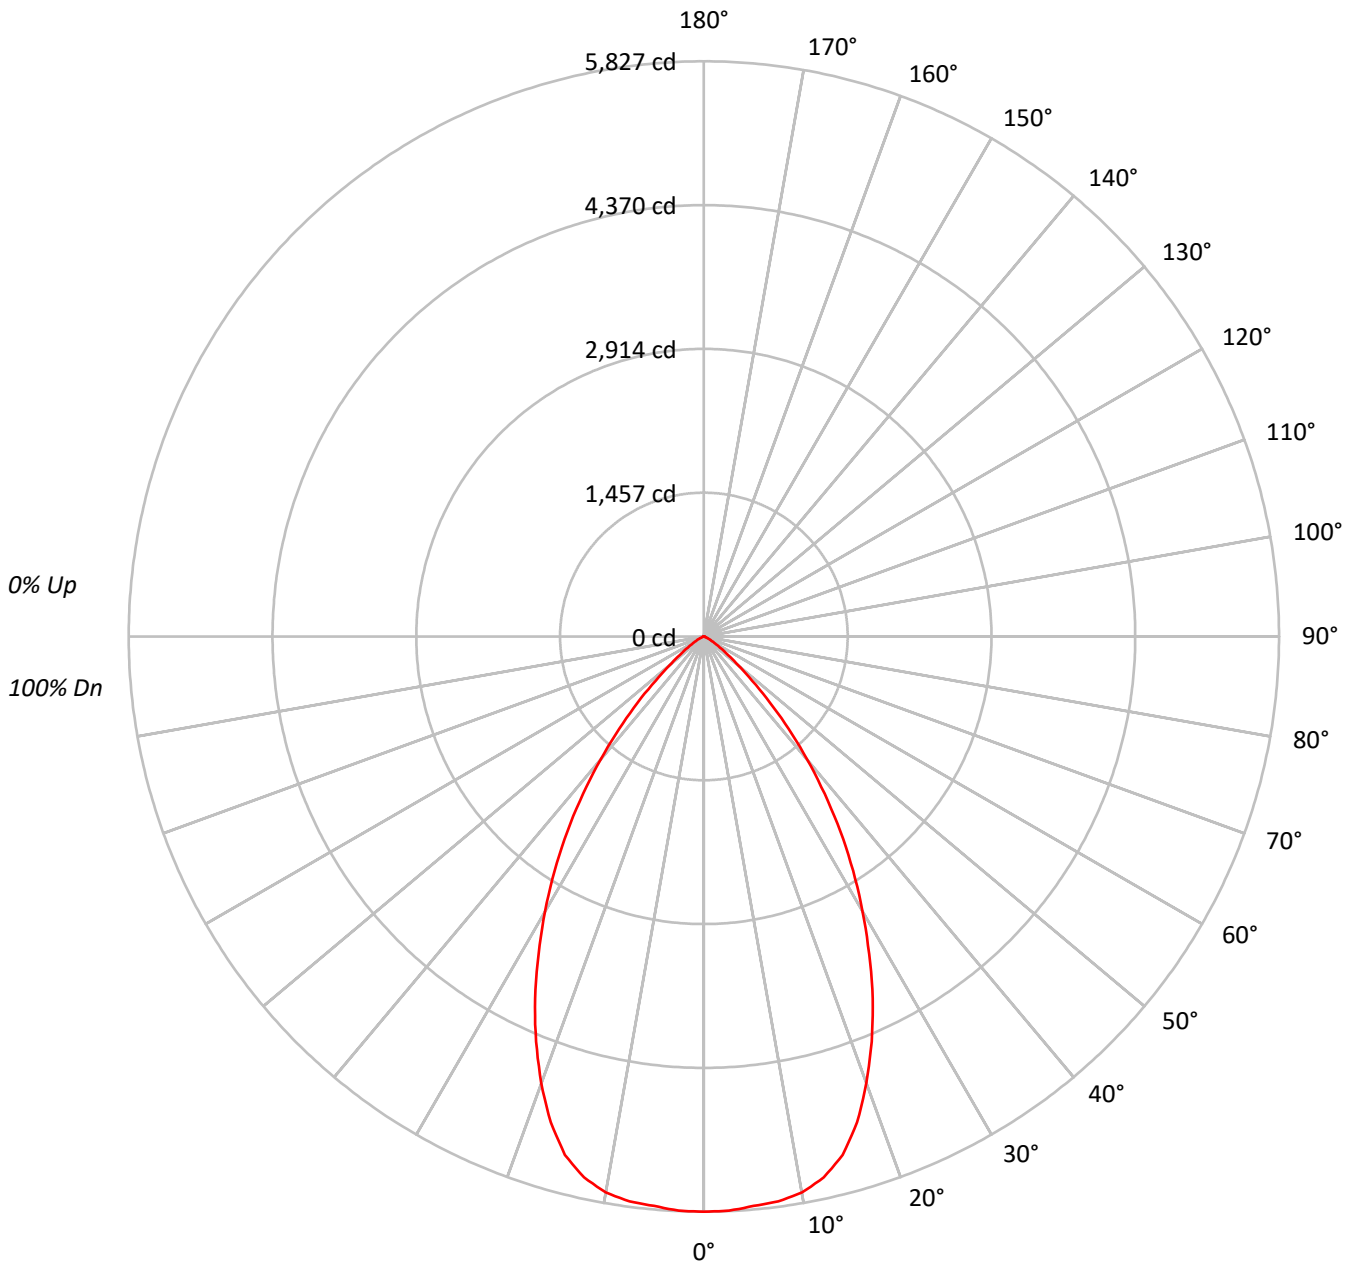



TEST NUMBER: P769283

CATALOG NUMBER: LD6D60D010-EU6DR6555659030-6LBCSSQMW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93			93																
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85			85																
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78			78																
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72			72																
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66			66																
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61			61																
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56			56																
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52			52																
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49			49																
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	46			46																

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	340343
5°	339485
10°	339194
15°	328737
20°	299275
25°	260801
30°	216911
35°	171871
40°	124044
45°	78367
50°	40851
55°	21709
60°	11400
65°	6274
70°	2630
75°	2888
80°	2018
85°	1742

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 78367 cd/sqm



TEST NUMBER: P769283

CATALOG NUMBER: LD6D60D010-EU6DR6555659030-6LBCSSQMW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	551.1	8.6
10°-20°	1509.1	23.5
20°-30°	1844.6	28.7
30°-40°	1496.7	23.3
40°-50°	745.8	11.6
50°-60°	208.0	3.2
60°-70°	47.3	0.7
70°-80°	12.3	0.2
80°-90°	3.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3904.8	60.8
0°-40°	5401.5	84.2
0°-60°	6355.3	99.0
0°-90°	6418.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6418.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5827	
5°	5791	551
15°	5437	1509
25°	4047	1845
35°	2411	1497
45°	949	746
55°	213	208
65°	45	47
75°	13	12
85°	3	3
90°	0	



TEST NUMBER: P769283

CATALOG NUMBER: LD6D60D010-EU6DR6555659030-6LBCSSQMW

CANDELA DISTRIBUTION (FULL):

0°	
0°	5827.4
2.5°	5823.1
5°	5790.6
7.5°	5771.7
10°	5719.5
12.5°	5613.3
15°	5436.9
17.5°	5161.2
20°	4815.2
22.5°	4441.8
25°	4047.1
27.5°	3624.9
30°	3216.4
32.5°	2813.1
35°	2410.6
37.5°	2009.0
40°	1627.0
42.5°	1269.1
45°	948.8
47.5°	661.1
50°	449.6
52.5°	310.0
55°	213.2
57.5°	143.9
60°	97.6
62.5°	67.7
65°	45.4
67.5°	23.1
70°	15.4
72.5°	14.6
75°	12.8
77.5°	8.6
80°	6.0
82.5°	4.3
85°	2.6
87.5°	1.7
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)