

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P768828

Luminaire Tested: LD6D60D010-EU6DR3555659035-6LBCSSQMW

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P768828  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-20)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D60D010-EU6DR3555659035-6LBCSSQMW  
Description: 6 INCH SQAURE SHALLOW CAST MATTE WHITE TRIM, WITH 35° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 6762.9 lumens  
Efficiency: N/A  
Efficacy: 105.0 lumens/watt  
Spacing Criteria (0/90/45): 0.6 / 0.6 / 0.54  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 64.4  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P768828  
CATALOG NUMBER: LD6D60D010-EU6DR3555659035-6LBCSSQMW

### Luminous Intensity Polar Plot

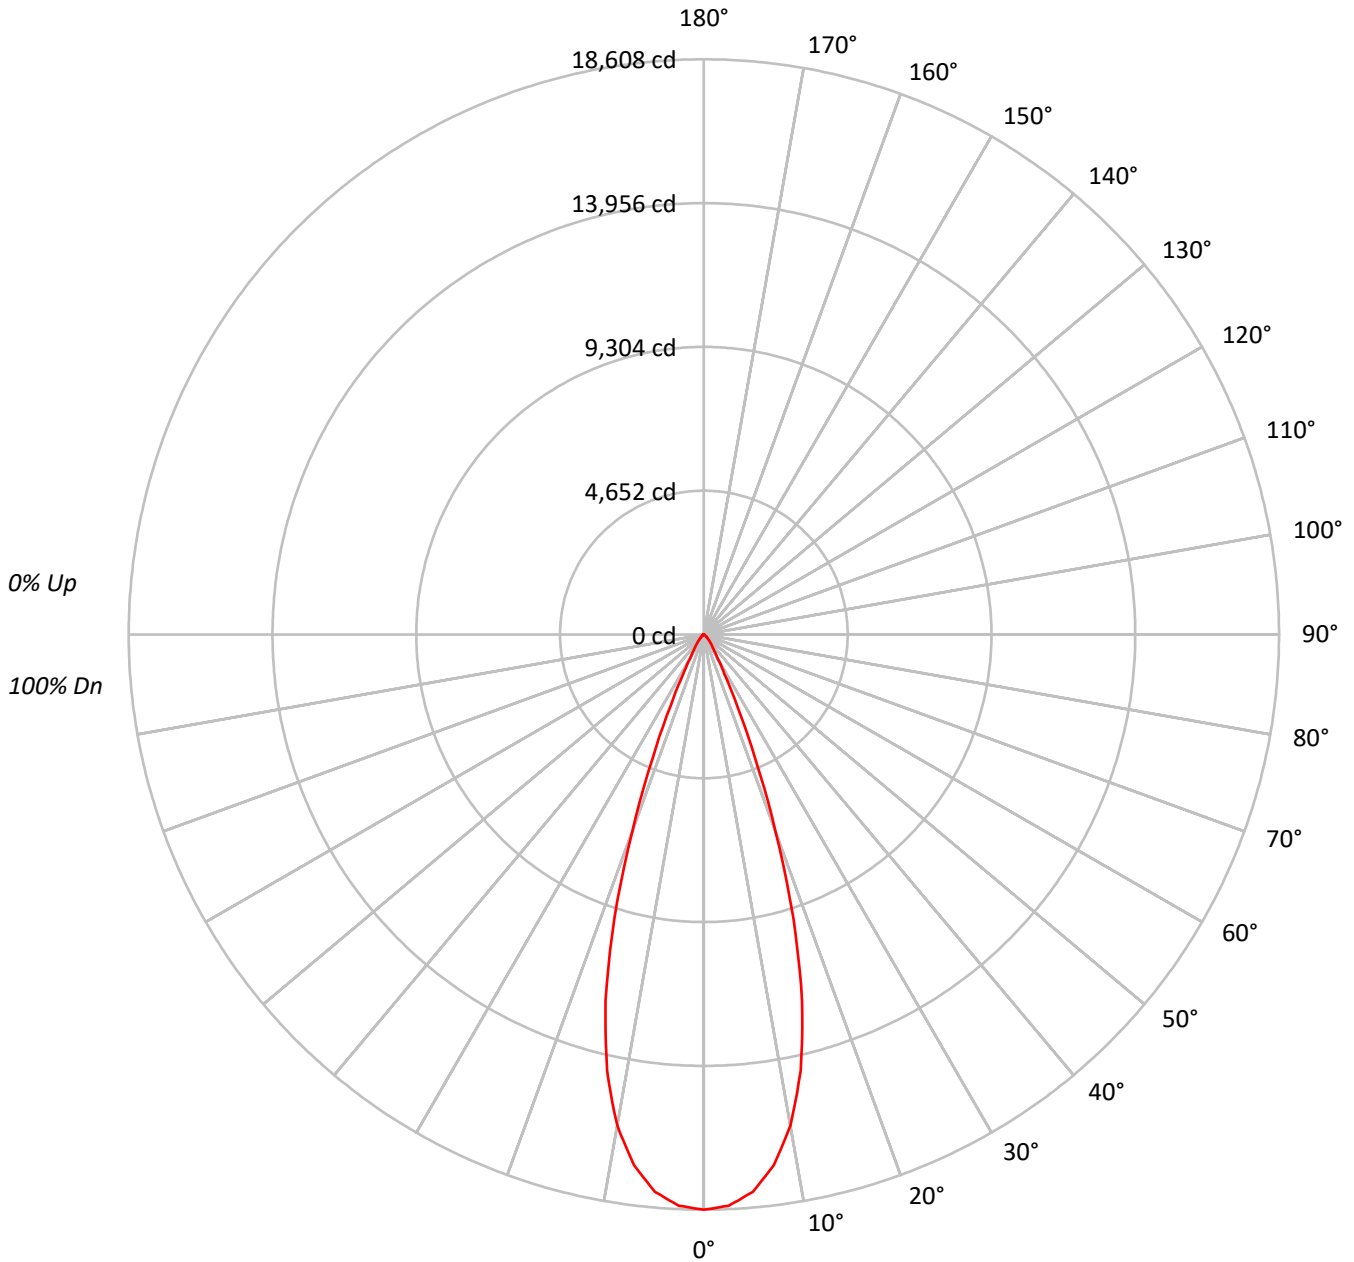



TEST NUMBER: P768828

CATALOG NUMBER: LD6D60D010-EU6DR3555659035-6LBCSSQMW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	115	112	110	108	112	110	108	107	106	105	103	103	101	100	99	98	98	96
2	110	106	103	101	108	105	102	99	102	99	97	99	97	95	96	95	93	92
3	106	101	97	94	105	100	96	93	97	95	92	95	93	91	93	91	89	88
4	103	97	92	89	101	96	92	89	94	90	88	92	89	87	90	88	86	84
5	99	93	88	85	98	92	87	84	90	86	84	89	85	83	87	84	82	81
6	96	89	84	81	94	88	84	81	87	83	80	85	82	80	84	81	79	78
7	93	85	81	78	91	85	80	77	84	80	77	83	79	77	82	79	76	75
8	90	82	78	74	88	82	77	74	81	77	74	80	76	74	79	76	73	72
9	87	79	75	72	86	79	75	72	78	74	71	77	74	71	77	73	71	70
10	84	77	72	69	83	76	72	69	76	72	69	75	71	69	74	71	69	68

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	2033124
5°	1985349
10°	1789330
15°	1388804
20°	787714
25°	306453
30°	114329
35°	62663
40°	40963
45°	24924
50°	15876
55°	11220
60°	8195
65°	4473
70°	319
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 24924 cd/sqm



TEST NUMBER: P768828

CATALOG NUMBER: LD6D60D010-EU6DR3555659035-6LBCSSQMW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	1664.8	24.6
10°-20°	3250.4	48.1
20°-30°	1325.6	19.6
30°-40°	317.2	4.7
40°-50°	132.2	2.0
50°-60°	54.7	0.8
60°-70°	17.1	0.3
70°-80°	0.4	0.0
80°-90°	0.3	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	6240.9	92.3
0°-40°	6558.2	97.0
0°-60°	6745.1	99.7
0°-90°	6762.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6762.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	18608	
5°	18102	###
15°	12278	3250
25°	2542	1326
35°	470	317
45°	161	132
55°	59	55
65°	17	17
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P768828

CATALOG NUMBER: LD6D60D010-EU6DR3555659035-6LBCSSQMW

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	18608.0
2.5°	18496.4
5°	18101.6
7.5°	17314.2
10°	16127.9
12.5°	14457.6
15°	12277.8
17.5°	9612.0
20°	6774.7
22.5°	4319.9
25°	2542.0
27.5°	1436.9
30°	906.2
32.5°	636.3
35°	469.8
37.5°	363.3
40°	287.2
42.5°	221.2
45°	161.3
47.5°	120.8
50°	93.4
52.5°	74.1
55°	58.9
57.5°	47.7
60°	37.5
62.5°	27.4
65°	17.3
67.5°	6.1
70°	1.0
72.5°	1.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	1.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)