

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P768916

Luminaire Tested: LD6D60D010-EU6DR4055659035-6LBSQW1MW

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P768916  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-28)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D60D010-EU6DR4055659035-6LBSQW1MW  
Description: 6 INCH SQAURE DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 40° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 6847.2 lumens  
Efficiency: N/A  
Efficacy: 106.3 lumens/watt  
Spacing Criteria (0/90/45): 0.68 / 0.68 / 0.6  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct


Input Watts (W): 64.4  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P768916

CATALOG NUMBER: LD6D60D010-EU6DR4055659035-6LBSQW1MW

### Luminous Intensity Polar Plot

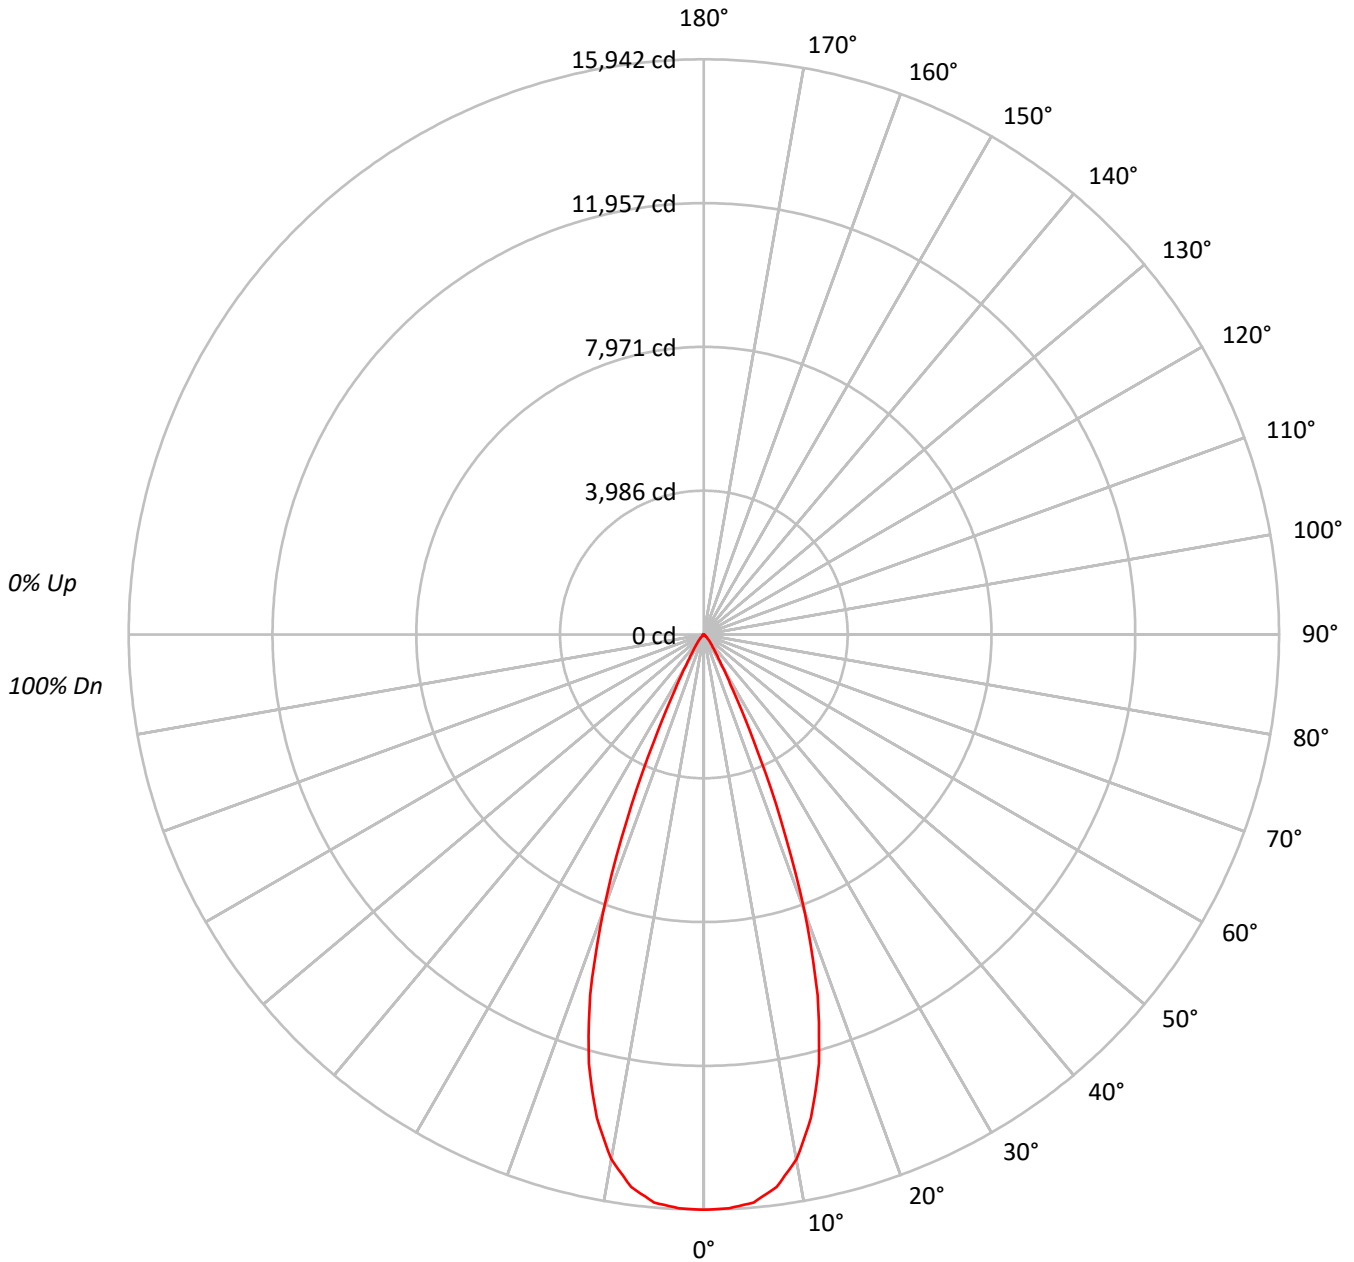



TEST NUMBER: P768916

CATALOG NUMBER: LD6D60D010-EU6DR4055659035-6LBSQW1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									20								
RC	80									50									30									10									0								
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0															
RCR	0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	99	98	97	96	95	94	93	92																
	1	115	112	110	108	112	110	108	107	106	105	103	103	101	100	99	98	97	96	95	94	93	92	91	90	89	88	87	86																
	2	110	106	103	100	108	105	102	99	102	99	97	99	97	95	96	95	93	92	91	90	89	88	87	86	85	84	83	82																
	3	106	101	97	94	104	100	96	93	97	94	92	95	93	90	93	91	89	88	87	86	85	84	83	82	81	80	79	78																
	4	102	97	92	89	101	95	91	88	93	90	87	92	89	86	90	87	85	84	83	82	81	80	79	78	77	76	75	74																
	5	99	92	88	84	97	91	87	84	90	86	83	88	85	83	87	84	82	81	80	79	78	77	76	75	74	73	72	71																
	6	95	88	84	80	94	88	83	80	86	82	80	85	82	79	84	81	79	78	77	76	75	74	73	72	71	70	69	68																
	7	92	85	80	77	91	84	80	77	83	79	76	82	79	76	81	78	76	75	74	73	72	71	70	69	68	67	66	65																
	8	89	82	77	74	88	81	77	74	80	76	73	79	76	73	78	75	73	72	71	70	69	68	67	66	65	64	63	62																
	9	86	79	74	71	85	78	74	71	77	73	71	76	73	70	76	72	70	69	68	67	66	65	64	63	62	61	60	59																
	10	83	76	71	68	82	75	71	68	75	71	68	74	70	68	73	70	68	67	66	65	64	63	62	61	60	59	58	57																

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	1741835
5°	1733375
10°	1638421
15°	1392865
20°	949333
25°	396098
30°	124549
35°	57888
40°	32006
45°	14679
50°	7122
55°	3905
60°	2032
65°	724
70°	288
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 14679 cd/sqm



TEST NUMBER: P768916

CATALOG NUMBER: LD6D60D010-EU6DR4055659035-6LBSQW1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	1475.7	21.6
10°-20°	3306.0	48.3
20°-30°	1654.9	24.2
30°-40°	303.3	4.4
40°-50°	83.7	1.2
50°-60°	19.7	0.3
60°-70°	3.8	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	6436.6	94.0
0°-40°	6739.9	98.4
0°-60°	6843.3	99.9
0°-90°	6847.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6847.2	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	15942	
5°	15804	###
15°	12314	3306
25°	3286	1655
35°	434	303
45°	95	84
55°	20	20
65°	3	4
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P768916

CATALOG NUMBER: LD6D60D010-EU6DR4055659035-6LBSQW1MW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	15942.0
2.5°	15918.8
5°	15804.2
7.5°	15439.1
10°	14767.7
12.5°	13720.9
15°	12313.7
17.5°	10483.7
20°	8164.7
22.5°	5566.4
25°	3285.6
27.5°	1736.9
30°	987.2
32.5°	637.9
35°	434.0
37.5°	310.1
40°	224.4
42.5°	153.7
45°	95.0
47.5°	60.5
50°	41.9
52.5°	29.8
55°	20.5
57.5°	13.0
60°	9.3
62.5°	5.6
65°	2.8
67.5°	1.9
70°	0.9
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)