

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P769308

Luminaire Tested: LD6D60D010-EU6DR6555659040-6LBCSSQMMS

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P769308
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D60D010-EU6DR6555659040-6LBCSSQMMS
Description: 6 INCH SQAURE SHALLOW CAST MATTE METALLIC SILVER TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6664.4 lumens
Efficiency: N/A
Efficacy: 103.5 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96
Luminous Opening: Circular (Dia: 0.48' x H: 0')
CIE Type: Direct

Input Watts (W): 64.4
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P769308
CATALOG NUMBER: LD6D60D010-EU6DR6555659040-6LBCSSQMMS

Luminous Intensity Polar Plot

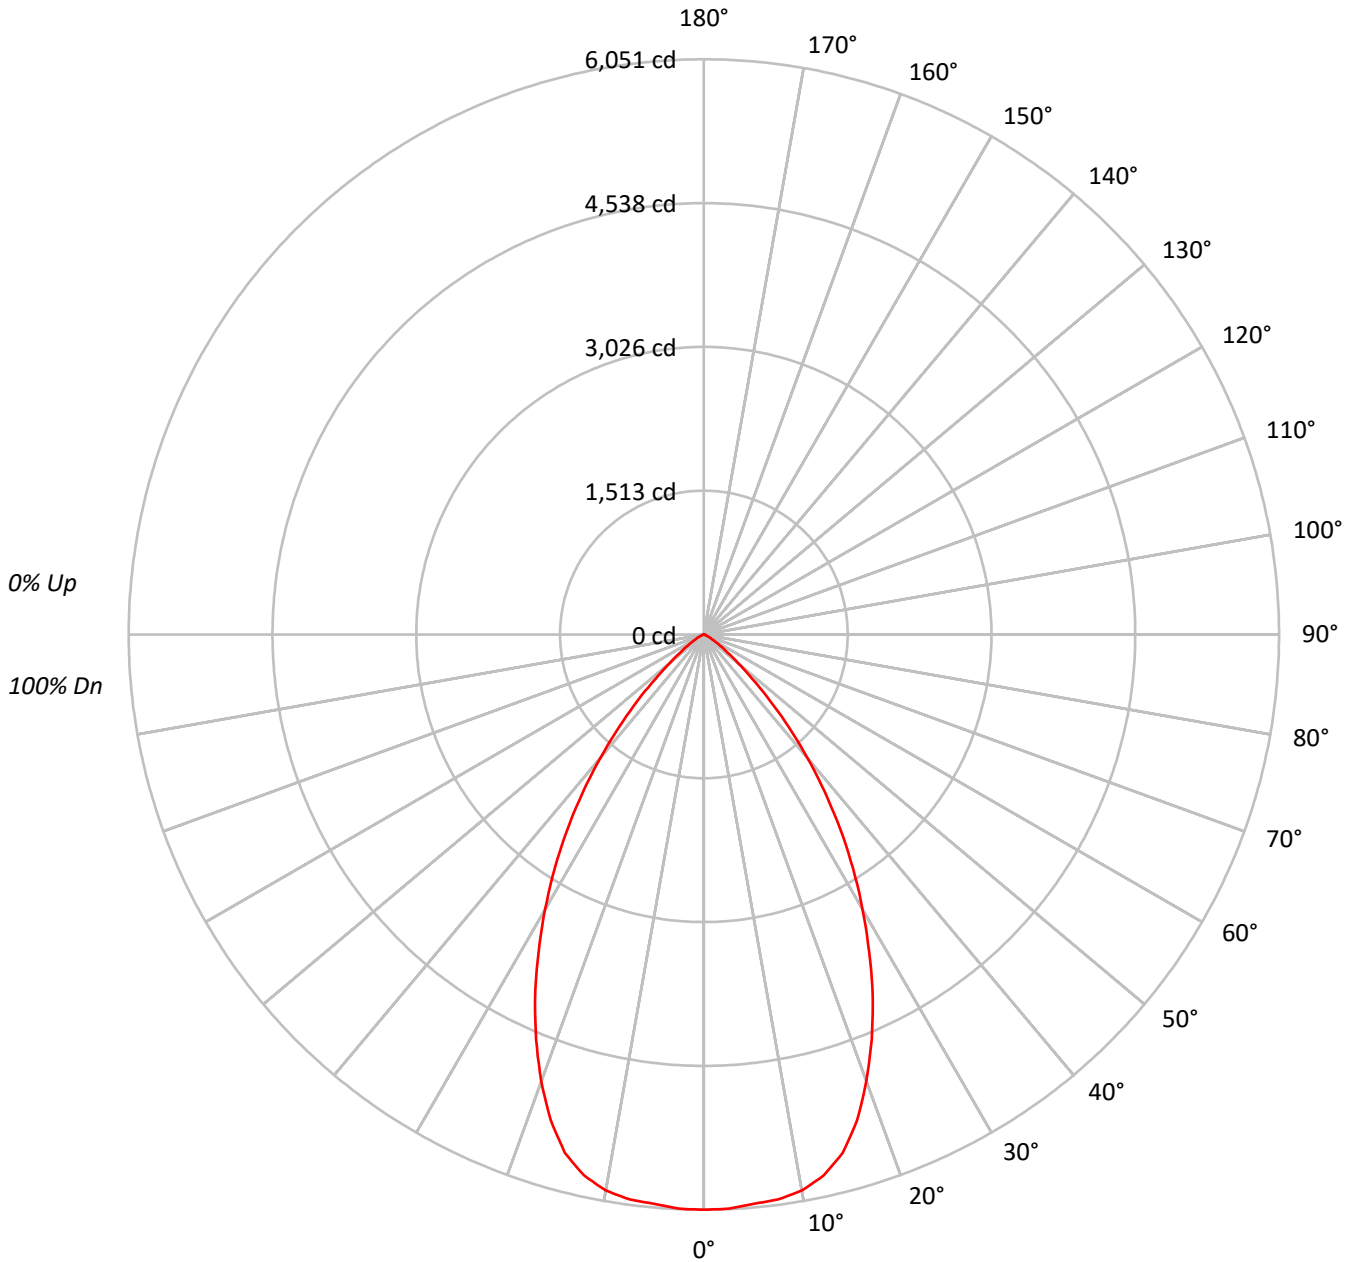



TEST NUMBER: P769308

CATALOG NUMBER: LD6D60D010-EU6DR6555659040-6LBCSSQMMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93			93																
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85			85																
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78			78																
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72			72																
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66			66																
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61			61																
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56			56																
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52			52																
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49			49																
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	46			46																

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	353408
5°	352518
10°	352217
15°	341362
20°	310767
25°	270816
30°	225239
35°	178473
40°	128809
45°	81381
50°	42414
55°	22544
60°	11844
65°	6509
70°	2732
75°	3001
80°	2085
85°	1809

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 81381 cd/sqm



TEST NUMBER: P769308

CATALOG NUMBER: LD6D60D010-EU6DR6555659040-6LBCSSQMMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	572.2	8.6
10°-20°	1567.0	23.5
20°-30°	1915.5	28.7
30°-40°	1554.1	23.3
40°-50°	774.5	11.6
50°-60°	216.0	3.2
60°-70°	49.1	0.7
70°-80°	12.8	0.2
80°-90°	3.3	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4054.7	60.8
0°-40°	5608.9	84.2
0°-60°	6599.3	99.0
0°-90°	6664.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6664.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	6051	
5°	6013	572
15°	5646	1567
25°	4202	1915
35°	2503	1554
45°	985	774
55°	221	216
65°	47	49
75°	13	13
85°	3	3
90°	0	



TEST NUMBER: P769308

CATALOG NUMBER: LD6D60D010-EU6DR6555659040-6LBCSSQMMS

CANDELA DISTRIBUTION (FULL):

	0°
0°	6051.1
2.5°	6046.7
5°	6012.9
7.5°	5993.4
10°	5939.1
12.5°	5828.8
15°	5645.7
17.5°	5359.3
20°	5000.1
22.5°	4612.4
25°	4202.5
27.5°	3764.1
30°	3339.9
32.5°	2921.1
35°	2503.2
37.5°	2086.1
40°	1689.5
42.5°	1317.8
45°	985.3
47.5°	686.5
50°	466.8
52.5°	321.9
55°	221.4
57.5°	149.4
60°	101.4
62.5°	70.2
65°	47.1
67.5°	24.0
70°	16.0
72.5°	15.1
75°	13.3
77.5°	8.9
80°	6.2
82.5°	4.4
85°	2.7
87.5°	1.8
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)