

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P769331

Luminaire Tested: LD6D60D010-EU6DR6555659050-6LBSQW1B

Issue Date: 2/5/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P769331  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-59)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/5/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D60D010-EU6DR6555659050-6LBSQW1B  
Description: 6 INCH SQAURE DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 65° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5114.6 lumens  
Efficiency: N/A  
Efficacy: 79.4 lumens/watt  
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.92  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct


Input Watts (W): 64.4  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P769331

CATALOG NUMBER: LD6D60D010-EU6DR6555659050-6LBSQW1B

### Luminous Intensity Polar Plot

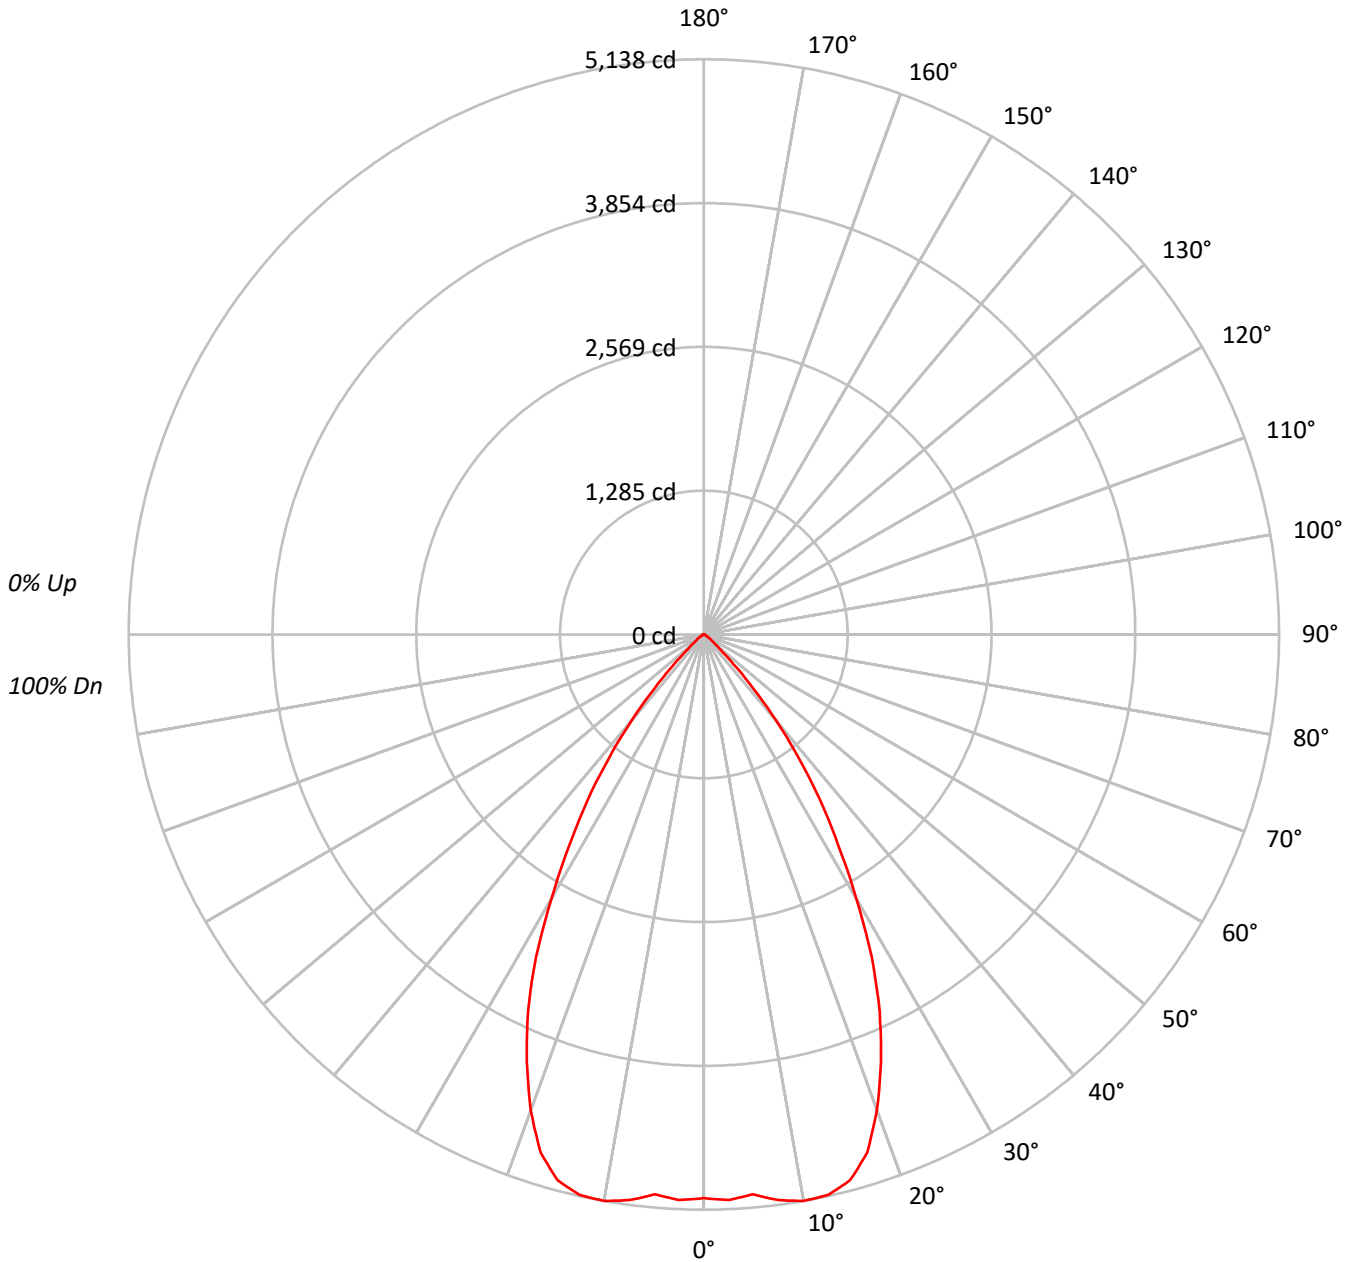



TEST NUMBER: P769331

CATALOG NUMBER: LD6D60D010-EU6DR6555659050-6LBSQW1B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93		
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87		
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	80		
4	97	89	84	79	95	88	83	79	86	82	78	84	80	77	82	79	76	75		
5	92	83	78	73	90	83	77	73	81	76	72	79	75	72	77	74	71	69		
6	87	78	72	68	86	77	72	68	76	71	67	74	70	67	73	69	66	65		
7	83	73	67	63	81	73	67	63	71	66	62	70	66	62	69	65	62	60		
8	79	69	63	59	77	68	63	59	67	62	58	66	62	58	65	61	58	57		
9	75	65	59	55	74	65	59	55	64	58	55	63	58	55	62	58	54	53		
10	71	61	56	52	70	61	55	52	60	55	51	59	55	51	59	54	51	50		

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	550204
5°	550661
10°	570042
15°	570993
20°	525693
25°	447913
30°	342900
35°	242250
40°	143001
45°	58052
50°	21043
55°	11715
60°	6730
65°	3697
70°	3897
75°	3039
80°	3146
85°	2633

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 58052 cd/sqm



TEST NUMBER: P769331

CATALOG NUMBER: LD6D60D010-EU6DR6555659050-6LBSQW1B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	484.9	9.5
10°-20°	1398.7	27.3
20°-30°	1678.2	32.8
30°-40°	1127.8	22.1
40°-50°	337.6	6.6
50°-60°	59.6	1.2
60°-70°	16.9	0.3
70°-80°	8.3	0.2
80°-90°	2.6	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3561.8	69.6
0°-40°	4689.6	91.7
0°-60°	5086.8	99.5
0°-90°	5114.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5114.6	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	5036	
5°	5021	485
15°	5048	1399
25°	3715	1678
35°	1816	1128
45°	376	338
55°	62	60
65°	14	17
75°	7	8
85°	2	3
90°	0	



TEST NUMBER: P769331

CATALOG NUMBER: LD6D60D010-EU6DR6555659050-6LBSQW1B

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	5035.7
2.5°	5057.2
5°	5020.7
7.5°	5096.5
10°	5138.0
12.5°	5128.0
15°	5047.9
17.5°	4851.8
20°	4521.2
22.5°	4131.9
25°	3715.4
27.5°	3245.3
30°	2717.9
32.5°	2239.8
35°	1816.2
37.5°	1397.6
40°	1002.6
42.5°	654.8
45°	375.7
47.5°	198.9
50°	123.8
52.5°	85.9
55°	61.5
57.5°	44.4
60°	30.8
62.5°	20.0
65°	14.3
67.5°	12.9
70°	12.2
72.5°	9.3
75°	7.2
77.5°	6.4
80°	5.0
82.5°	3.6
85°	2.1
87.5°	1.4
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)