

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P770048

Luminaire Tested: LD6D65D010-EU6DR6555659027-6LBCSSQMB

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P770048  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D65D010-EU6DR6555659027-6LBCSSQMB  
Description: 6 INCH SQAURE SHALLOW CAST MATTE BLACK TRIM, WITH 65° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 6763.7 lumens  
Efficiency: N/A  
Efficacy: 92.9 lumens/watt  
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96  
Luminous Opening: Circular (Dia: 0.48' x H: 0')  
CIE Type: Direct

Input Watts (W): 72.8  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P770048  
CATALOG NUMBER: LD6D65D010-EU6DR6555659027-6LBCSSQMB

### Luminous Intensity Polar Plot

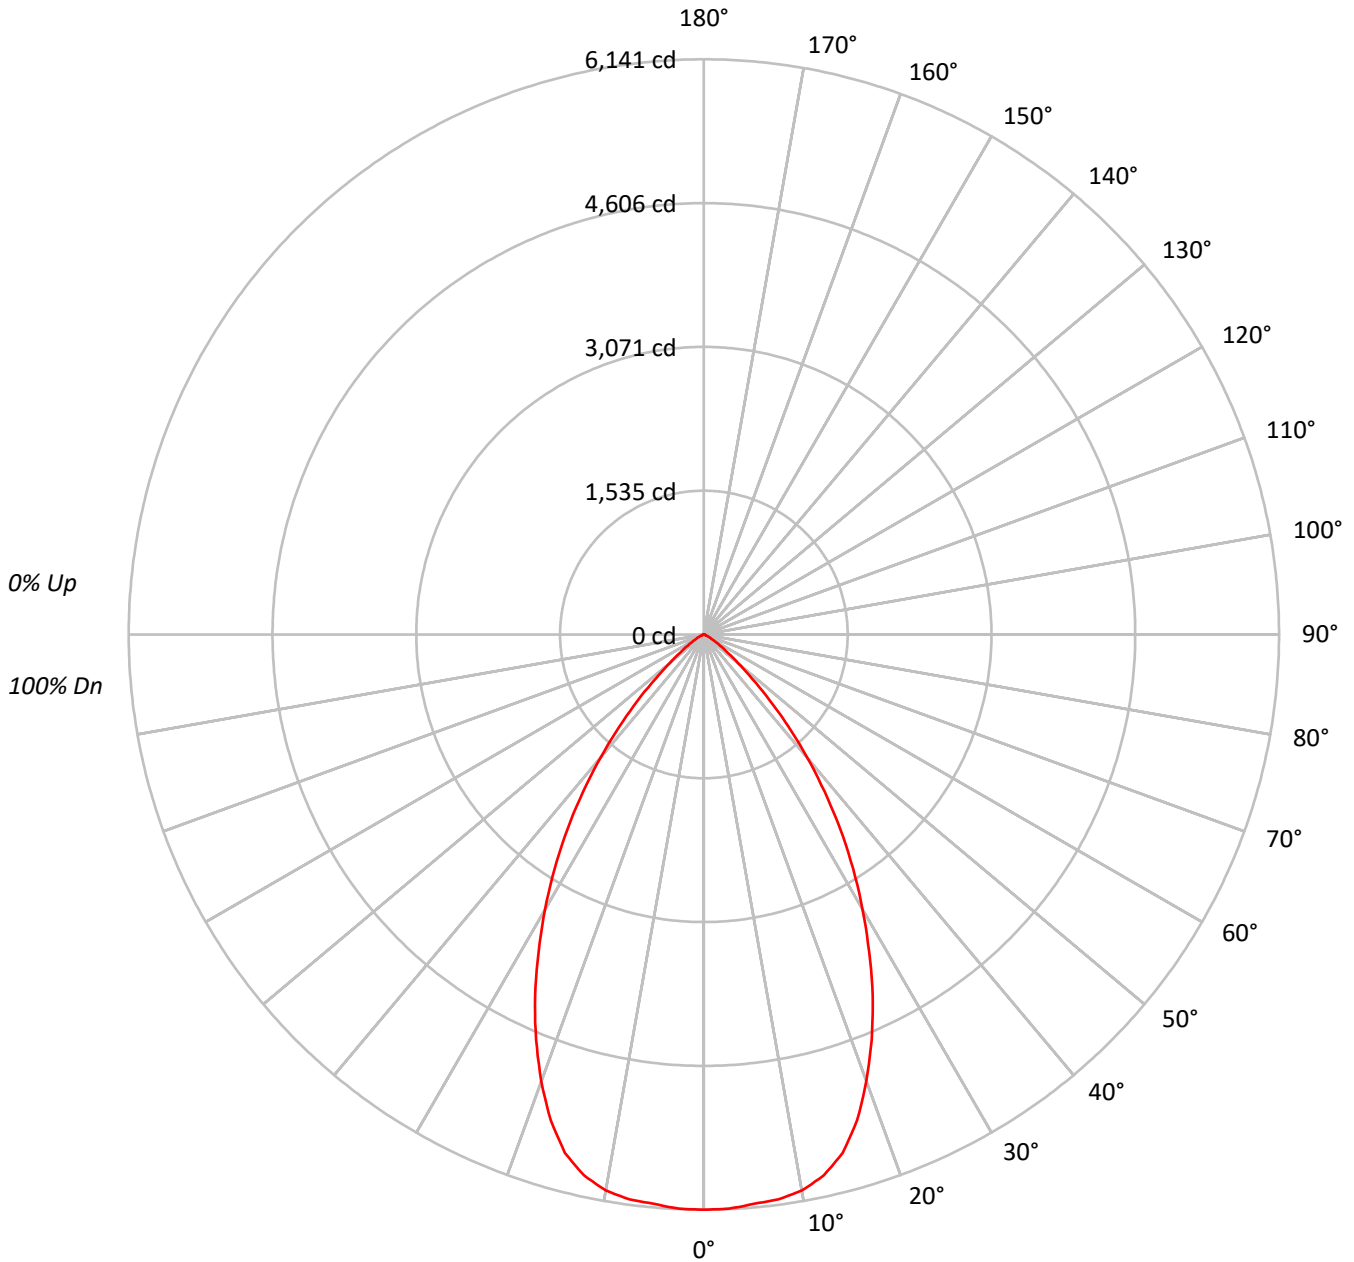



TEST NUMBER: P770048

CATALOG NUMBER: LD6D65D010-EU6DR6555659027-6LBCSSQMB

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	46

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	358676
5°	357771
10°	357466
15°	346447
20°	315397
25°	274850
30°	228598
35°	181132
40°	130730
45°	82587
50°	43050
55°	22880
60°	12020
65°	6606
70°	2766
75°	3046
80°	2119
85°	1809

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 82587 cd/sqm



TEST NUMBER: P770048

CATALOG NUMBER: LD6D65D010-EU6DR6555659027-6LBCSSQMB

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	580.8	8.6
10°-20°	1590.4	23.5
20°-30°	1944.0	28.7
30°-40°	1577.3	23.3
40°-50°	786.0	11.6
50°-60°	219.2	3.2
60°-70°	49.8	0.7
70°-80°	12.9	0.2
80°-90°	3.3	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4115.2	60.8
0°-40°	5692.5	84.2
0°-60°	6697.7	99.0
0°-90°	6763.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6763.7	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	6141	
5°	6102	581
15°	5730	1590
25°	4265	1944
35°	2540	1577
45°	1000	786
55°	225	219
65°	48	50
75°	14	13
85°	3	3
90°	0	



TEST NUMBER: P770048

CATALOG NUMBER: LD6D65D010-EU6DR6555659027-6LBCSSQMB

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	6141.3
2.5°	6136.8
5°	6102.5
7.5°	6082.7
10°	6027.6
12.5°	5915.7
15°	5729.8
17.5°	5439.2
20°	5074.6
22.5°	4681.1
25°	4265.1
27.5°	3820.2
30°	3389.7
32.5°	2964.6
35°	2540.5
37.5°	2117.2
40°	1714.7
42.5°	1337.5
45°	999.9
47.5°	696.7
50°	473.8
52.5°	326.7
55°	224.7
57.5°	151.6
60°	102.9
62.5°	71.3
65°	47.8
67.5°	24.4
70°	16.2
72.5°	15.3
75°	13.5
77.5°	9.0
80°	6.3
82.5°	4.5
85°	2.7
87.5°	1.8
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)