

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P770138

Luminaire Tested: LD6D65D010-EU6DR7055659027-6LBSQW1MW

Issue Date: 2/5/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P770138  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-73)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/5/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D65D010-EU6DR7055659027-6LBSQW1MW  
Description: 6 INCH SQAURE DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 70° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 6382.9 lumens  
Efficiency: N/A  
Efficacy: 87.7 lumens/watt  
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.82  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 72.8  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P770138  
CATALOG NUMBER: LD6D65D010-EU6DR7055659027-6LBSQW1MW

### Luminous Intensity Polar Plot

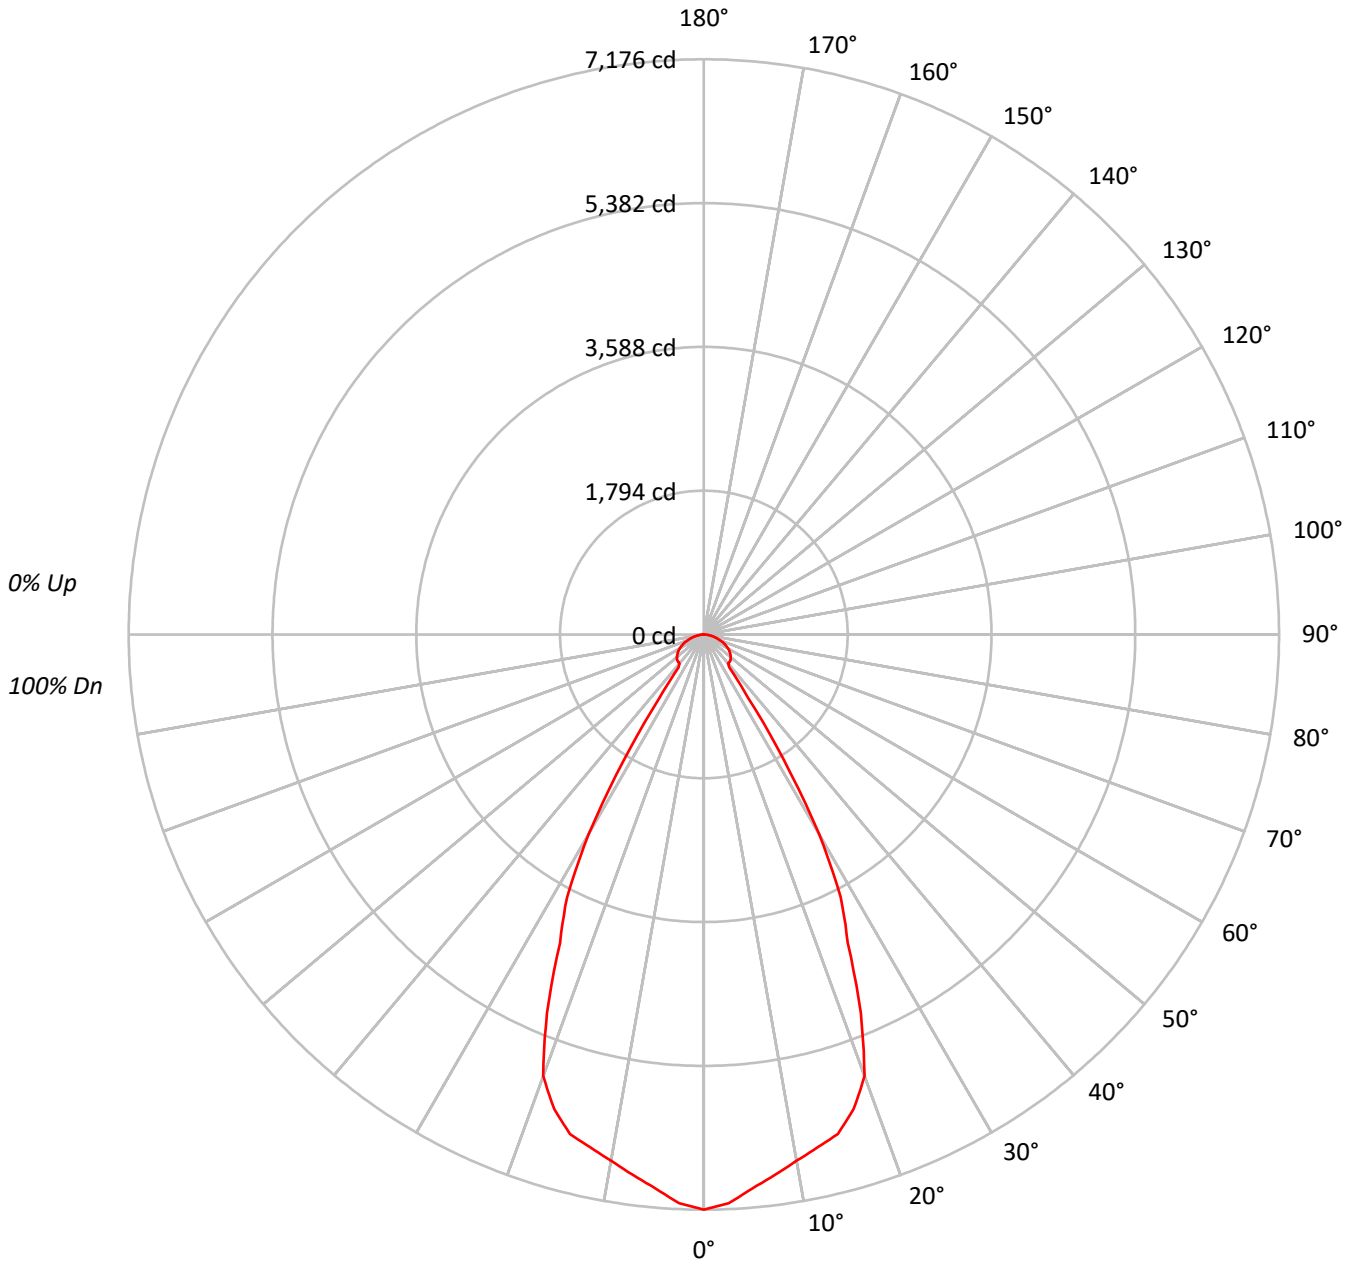



TEST NUMBER: P770138

CATALOG NUMBER: LD6D65D010-EU6DR7055659027-6LBSQW1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	112	109	106	103	110	107	104	102	103	101	99	99	97	96	95	94	93	91																			
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	85	83																			
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	78	76																			
4	94	86	80	75	92	85	79	74	82	77	73	80	76	73	78	75	72	70																			
5	89	80	74	69	87	79	73	69	77	72	68	75	71	67	74	70	67	65																			
6	85	75	68	64	83	74	68	64	73	67	63	71	66	63	70	66	62	61																			
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57																			
8	77	66	60	56	75	66	60	56	65	59	55	64	59	55	63	58	55	53																			
9	73	63	57	52	72	62	56	52	61	56	52	60	55	52	60	55	52	50																			
10	70	59	53	49	69	59	53	49	58	53	49	57	52	49	57	52	49	48																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	784077
5°	760782
10°	739579
15°	729875
20°	681557
25°	512013
30°	361950
35°	128208
40°	67421
45°	71805
50°	74349
55°	75758
60°	76220
65°	74613
70°	70408
75°	65222
80°	57887
85°	47011

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 57.5°  
 Luminance: 76237 cd/sqm



TEST NUMBER: P770138

CATALOG NUMBER: LD6D65D010-EU6DR7055659027-6LBSQW1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	654.3	10.3
10°-20°	1794.6	28.1
20°-30°	1976.5	31.0
30°-40°	755.2	11.8
40°-50°	356.6	5.6
50°-60°	354.5	5.6
60°-70°	283.8	4.4
70°-80°	163.1	2.6
80°-90°	44.4	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4425.4	69.3
0°-40°	5180.5	81.2
0°-60°	5891.6	92.3
0°-90°	6382.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6382.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	7176	
5°	6936	654
15°	6452	1795
25°	4247	1977
35°	961	755
45°	465	357
55°	398	354
65°	289	284
75°	154	163
85°	38	44
90°	0	



TEST NUMBER: P770138

CATALOG NUMBER: LD6D65D010-EU6DR7055659027-6LBSQW1MW

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	7176.2
2.5°	7101.2
5°	6936.5
7.5°	6799.0
10°	6666.1
12.5°	6553.6
15°	6452.5
17.5°	6208.2
20°	5861.7
22.5°	5114.0
25°	4247.1
27.5°	3697.2
30°	2868.9
32.5°	1853.1
35°	961.2
37.5°	519.2
40°	472.7
42.5°	469.3
45°	464.7
47.5°	454.5
50°	437.4
52.5°	418.1
55°	397.7
57.5°	374.9
60°	348.8
62.5°	319.3
65°	288.6
67.5°	254.5
70°	220.4
72.5°	186.3
75°	154.5
77.5°	121.6
80°	92.0
82.5°	64.8
85°	37.5
87.5°	14.8
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)