

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P769827

Luminaire Tested: LD6D65D010-EU6DR5055659030-6LBCSSQMB

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P769827  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-44)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D65D010-EU6DR5055659030-6LBCSSQMB  
Description: 6 INCH SQAURE SHALLOW CAST MATTE BLACK TRIM, WITH 50° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 7931.9 lumens  
Efficiency: N/A  
Efficacy: 109.0 lumens/watt  
Spacing Criteria (0/90/45): 0.8 / 0.8 / 0.73  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 72.8  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P769827  
CATALOG NUMBER: LD6D65D010-EU6DR5055659030-6LBCSSQMB

### Luminous Intensity Polar Plot

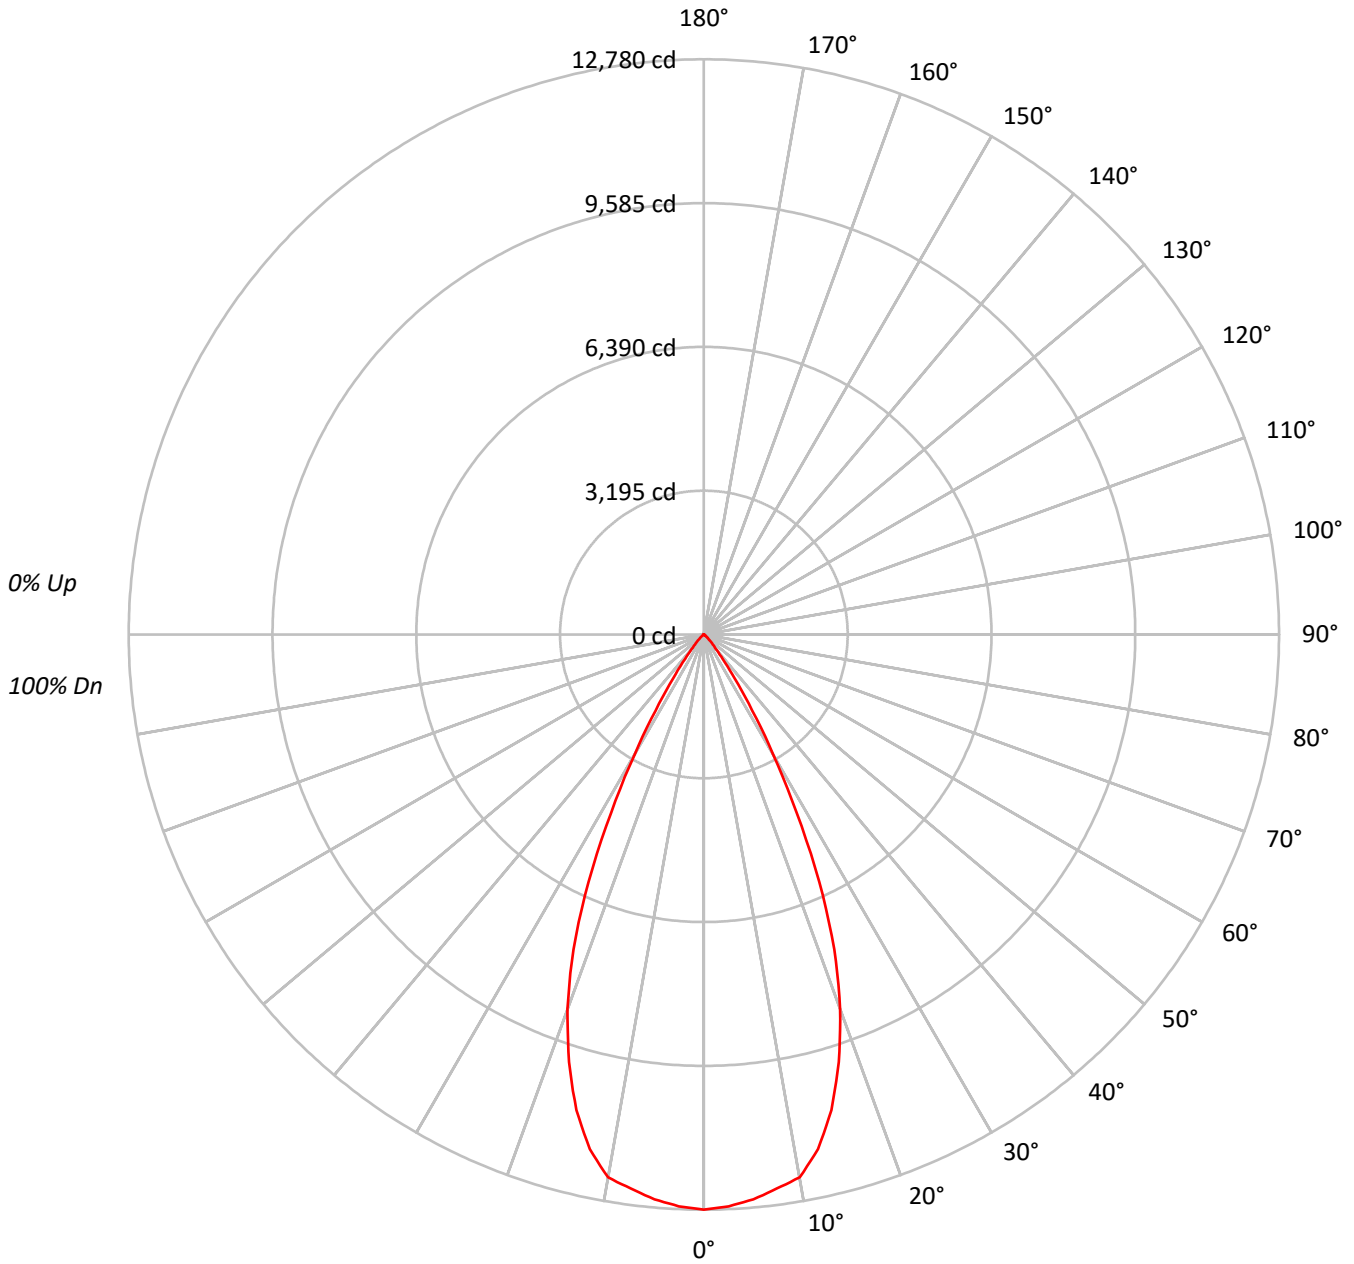



TEST NUMBER: P769827

CATALOG NUMBER: LD6D65D010-EU6DR5055659030-6LBCSSQMB

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	114	112	109	107	112	110	108	106	106	104	102	102	101	99	98	97	97	95		
2	109	105	101	98	107	103	100	97	100	98	95	97	95	93	95	93	91	90		
3	105	99	95	91	103	98	94	90	95	92	89	93	90	88	91	88	86	85		
4	100	94	89	85	99	93	88	85	90	87	84	89	85	83	87	84	82	80		
5	96	89	84	80	95	88	83	79	86	82	79	85	81	78	83	80	77	76		
6	92	84	79	75	91	83	79	75	82	78	74	81	77	74	79	76	74	72		
7	88	80	75	71	87	79	74	71	78	74	71	77	73	70	76	73	70	69		
8	85	76	71	67	84	76	71	67	75	70	67	74	70	67	73	69	66	65		
9	81	73	68	64	80	72	67	64	71	67	64	71	67	64	70	66	63	62		
10	78	70	64	61	77	69	64	61	68	64	61	68	64	61	67	63	60	59		

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	1396374
5°	1381736
10°	1358981
15°	1237467
20°	1029713
25°	730943
30°	386893
35°	157658
40°	58550
45°	26809
50°	10998
55°	5753
60°	2819
65°	827
70°	0
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 26809 cd/sqm



TEST NUMBER: P769827

CATALOG NUMBER: LD6D65D010-EU6DR5055659030-6LBCSSQMB

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	1190.8	15.0
10°-20°	3009.4	37.9
20°-30°	2703.2	34.1
30°-40°	846.3	10.7
40°-50°	148.2	1.9
50°-60°	29.6	0.4
60°-70°	4.4	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	6903.3	87.0
0°-40°	7749.7	97.7
0°-60°	7927.4	99.9
0°-90°	7931.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	7931.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	12780	
5°	12598	###
15°	10940	3009
25°	6063	2703
35°	1182	846
45°	174	148
55°	30	30
65°	3	4
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P769827

CATALOG NUMBER: LD6D65D010-EU6DR5055659030-6LBCSSQMB

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	12780.2
2.5°	12716.7
5°	12598.1
7.5°	12417.1
10°	12249.0
12.5°	11710.3
15°	10939.9
17.5°	9961.5
20°	8856.0
22.5°	7577.0
25°	6063.1
27.5°	4457.6
30°	3066.6
32.5°	1996.6
35°	1182.0
37.5°	678.8
40°	410.5
42.5°	267.2
45°	173.5
47.5°	105.6
50°	64.7
52.5°	44.2
55°	30.2
57.5°	20.5
60°	12.9
62.5°	7.5
65°	3.2
67.5°	1.1
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)