

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P770164

Luminaire Tested: LD6D65D010-EU6DR7055659035-6LBSQW1MW

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P770164
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-73)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D65D010-EU6DR7055659035-6LBSQW1MW
Description: 6 INCH SQAURE DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 70° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6645.1 lumens
Efficiency: N/A
Efficacy: 91.3 lumens/watt
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.82
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct


Input Watts (W): 72.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P770164

CATALOG NUMBER: LD6D65D010-EU6DR7055659035-6LBSQW1MW

Luminous Intensity Polar Plot

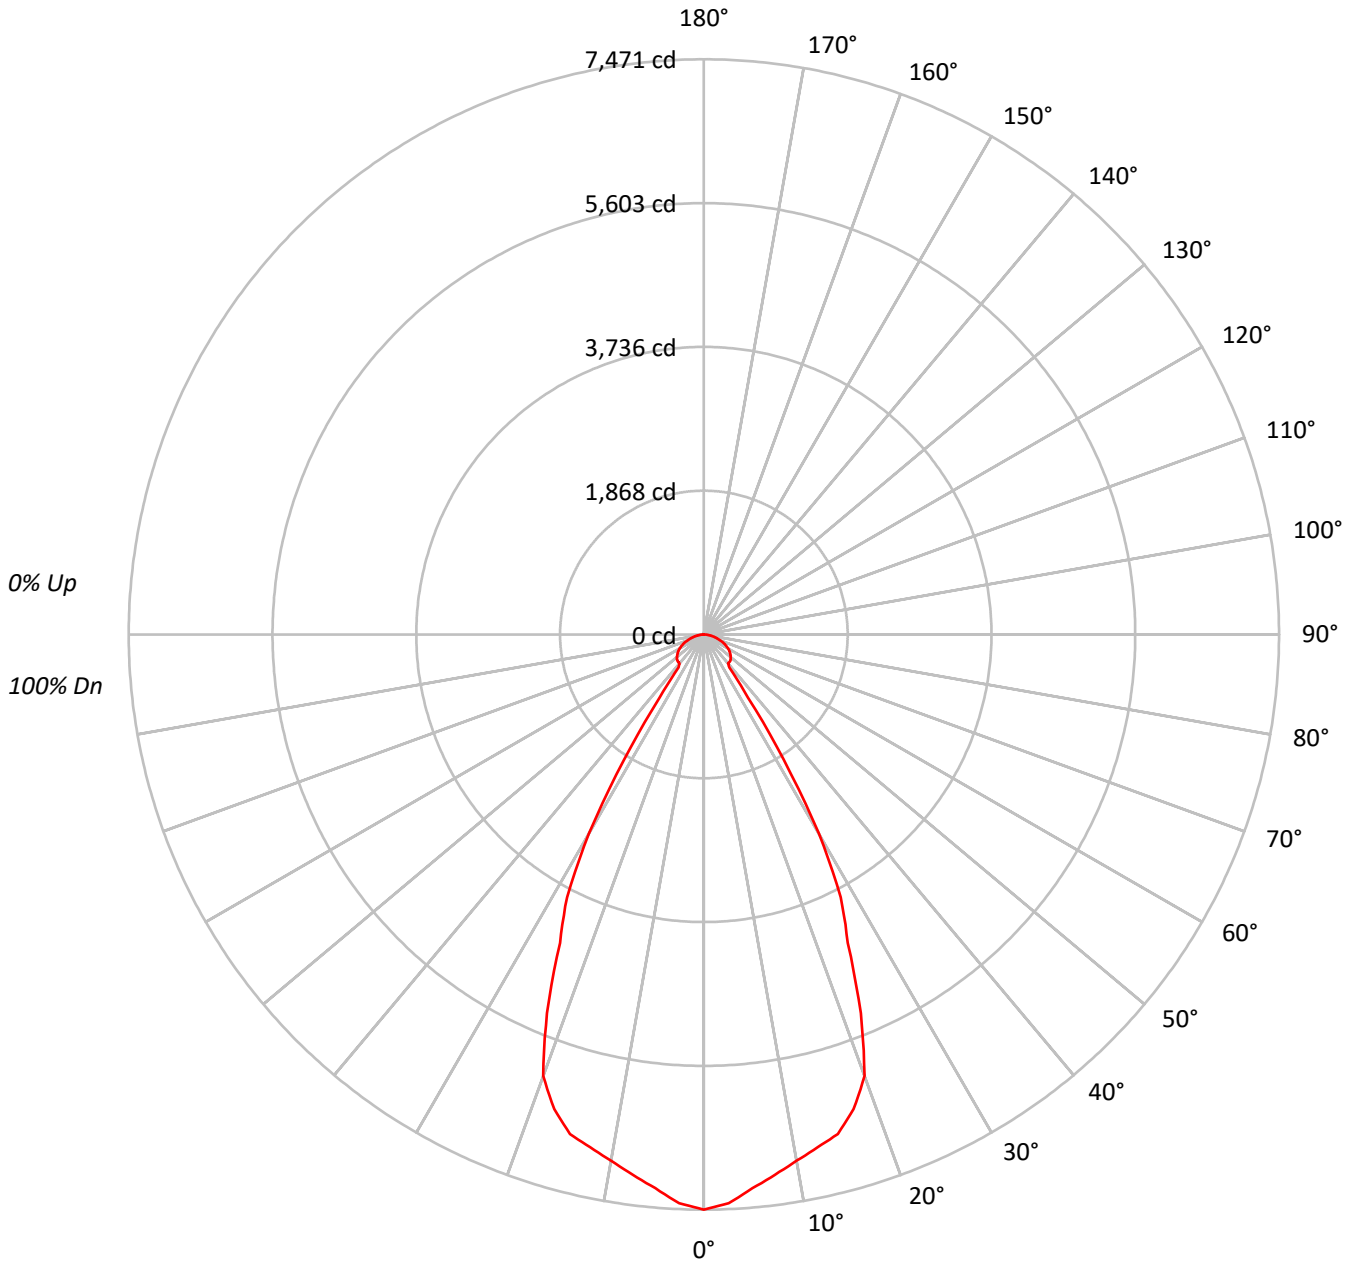



TEST NUMBER: P770164

CATALOG NUMBER: LD6D65D010-EU6DR7055659035-6LBSQW1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	112	109	106	103	110	107	104	102	103	101	99	99	97	96	95	94	93	91																			
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	85	83																			
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	78	76																			
4	94	86	80	75	92	85	79	74	82	77	73	80	76	73	78	75	72	70																			
5	89	80	74	69	87	79	73	69	77	72	68	75	71	67	74	70	67	65																			
6	85	75	68	64	83	74	68	64	73	67	63	71	66	63	70	66	62	61																			
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57																			
8	77	66	60	56	75	66	60	56	65	59	55	64	59	55	63	58	55	53																			
9	73	63	57	52	72	62	56	52	61	56	52	60	55	52	60	55	52	50																			
10	70	59	53	49	69	59	53	49	58	53	49	57	52	49	57	52	49	48																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	816287
5°	792030
10°	769956
15°	759850
20°	709544
25°	533038
30°	376812
35°	133476
40°	70188
45°	74756
50°	77409
55°	78863
60°	79345
65°	77663
70°	73315
75°	67924
80°	60278
85°	48891

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 57.5°
 Luminance: 79368 cd/sqm



TEST NUMBER: P770164

CATALOG NUMBER: LD6D65D010-EU6DR7055659035-6LBSQW1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	681.1	10.3
10°-20°	1868.3	28.1
20°-30°	2057.7	31.0
30°-40°	786.2	11.8
40°-50°	371.2	5.6
50°-60°	369.0	5.6
60°-70°	295.5	4.4
70°-80°	169.8	2.6
80°-90°	46.2	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4607.1	69.3
0°-40°	5393.3	81.2
0°-60°	6133.6	92.3
0°-90°	6645.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6645.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	7471	
5°	7221	681
15°	6718	1868
25°	4422	2058
35°	1001	786
45°	484	371
55°	414	369
65°	300	295
75°	161	170
85°	39	46
90°	0	



TEST NUMBER: P770164

CATALOG NUMBER: LD6D65D010-EU6DR7055659035-6LBSQW1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	7471.0
2.5°	7392.9
5°	7221.4
7.5°	7078.3
10°	6939.9
12.5°	6822.8
15°	6717.5
17.5°	6463.2
20°	6102.4
22.5°	5324.1
25°	4421.5
27.5°	3849.0
30°	2986.7
32.5°	1929.3
35°	1000.7
37.5°	540.6
40°	492.1
42.5°	488.5
45°	483.8
47.5°	473.1
50°	455.4
52.5°	435.3
55°	414.0
57.5°	390.3
60°	363.1
62.5°	332.4
65°	300.4
67.5°	265.0
70°	229.5
72.5°	194.0
75°	160.9
77.5°	126.6
80°	95.8
82.5°	67.4
85°	39.0
87.5°	15.4
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)