

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P770099

Luminaire Tested: LD6D65D010-EU6DR6555659040-6LBSQW1MW

Issue Date: 2/5/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P770099  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-59)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/5/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D65D010-EU6DR6555659040-6LBSQW1MW  
Description: 6 INCH SQAURE DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 65° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 6603.0 lumens  
Efficiency: N/A  
Efficacy: 90.7 lumens/watt  
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.92  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 72.8  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P770099  
CATALOG NUMBER: LD6D65D010-EU6DR6555659040-6LBSQW1MW

### Luminous Intensity Polar Plot

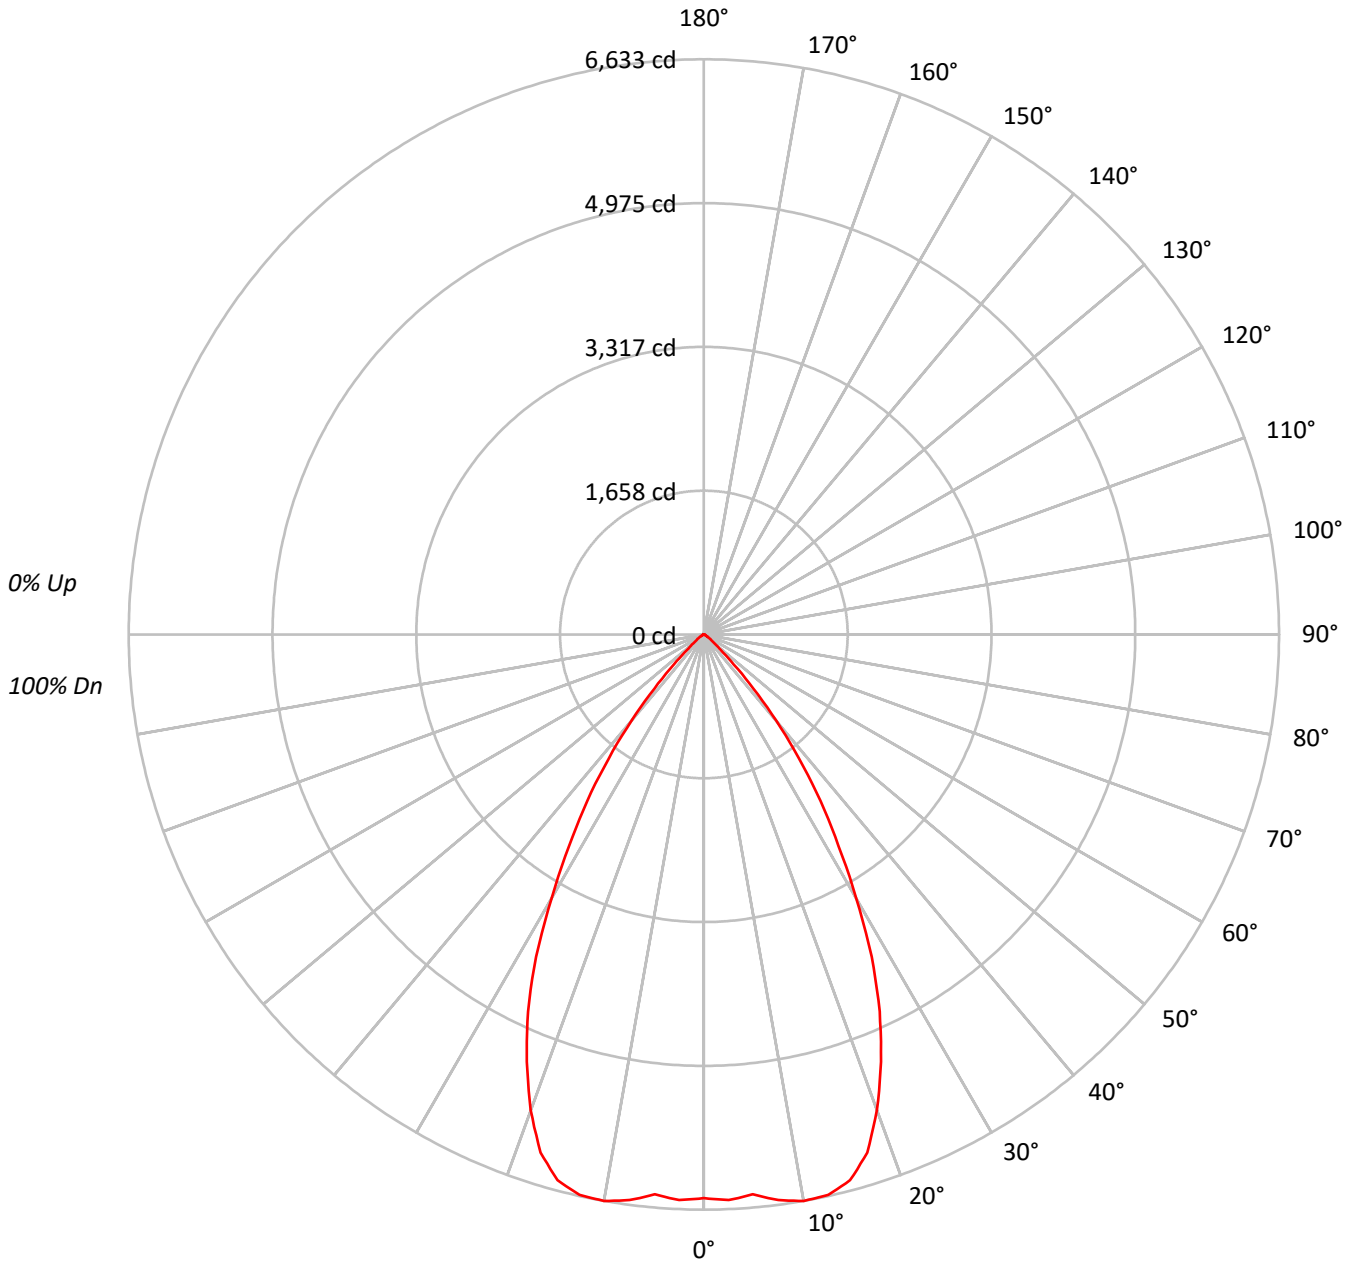



TEST NUMBER: P770099

CATALOG NUMBER: LD6D65D010-EU6DR6555659040-6LBSQW1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93			
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87			
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	80			
4	97	89	84	79	95	88	83	79	86	82	78	84	80	77	82	79	76	75			
5	92	83	78	73	90	83	77	73	81	76	72	79	75	72	77	74	71	69			
6	87	78	72	68	86	77	72	68	76	71	67	74	70	67	73	69	66	65			
7	83	73	67	63	81	73	67	63	71	66	62	70	66	62	69	65	62	60			
8	79	69	63	59	77	68	63	59	67	62	58	66	62	58	65	61	58	57			
9	75	65	59	55	74	65	59	55	64	58	55	63	58	55	62	58	54	53			
10	71	61	56	52	70	61	55	52	60	55	51	59	55	51	59	54	51	50			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	710315
5°	710901
10°	735929
15°	737148
20°	678673
25°	578258
30°	442682
35°	312743
40°	184606
45°	74941
50°	27163
55°	15144
60°	8675
65°	4783
70°	5015
75°	3884
80°	4090
85°	3510

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 74941 cd/sqm



TEST NUMBER: P770099

CATALOG NUMBER: LD6D65D010-EU6DR6555659040-6LBSQW1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	626.0	9.5
10°-20°	1805.7	27.3
20°-30°	2166.5	32.8
30°-40°	1456.0	22.1
40°-50°	435.8	6.6
50°-60°	76.9	1.2
60°-70°	21.9	0.3
70°-80°	10.7	0.2
80°-90°	3.4	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4598.3	69.6
0°-40°	6054.3	91.7
0°-60°	6567.0	99.5
0°-90°	6603.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6603.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	6501	
5°	6482	626
15°	6517	1806
25°	4797	2167
35°	2345	1456
45°	485	436
55°	80	77
65°	18	22
75°	9	11
85°	3	3
90°	0	



TEST NUMBER: P770099

CATALOG NUMBER: LD6D65D010-EU6DR6555659040-6LBSQW1MW

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	6501.1
2.5°	6528.8
5°	6481.7
7.5°	6579.7
10°	6633.2
12.5°	6620.3
15°	6516.8
17.5°	6263.7
20°	5836.9
22.5°	5334.3
25°	4796.6
27.5°	4189.7
30°	3508.8
32.5°	2891.6
35°	2344.7
37.5°	1804.3
40°	1294.3
42.5°	845.3
45°	485.0
47.5°	256.8
50°	159.8
52.5°	110.9
55°	79.5
57.5°	57.3
60°	39.7
62.5°	25.9
65°	18.5
67.5°	16.6
70°	15.7
72.5°	12.0
75°	9.2
77.5°	8.3
80°	6.5
82.5°	4.6
85°	2.8
87.5°	1.8
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)