

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P770827

Luminaire Tested: LD6D70BD010-EU6DR6570959024-6LBSQW1MW

Issue Date: 2/5/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P770827  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-59)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/5/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D70BD010-EU6DR6570959024-6LBSQW1MW  
Description: 6 INCH SQAURE DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 65° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5452.4 lumens  
Efficiency: N/A  
Efficacy: 81.9 lumens/watt  
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.92  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct


Input Watts (W): 66.6  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P770827

CATALOG NUMBER: LD6D70BD010-EU6DR6570959024-6LBSQW1MW

### Luminous Intensity Polar Plot

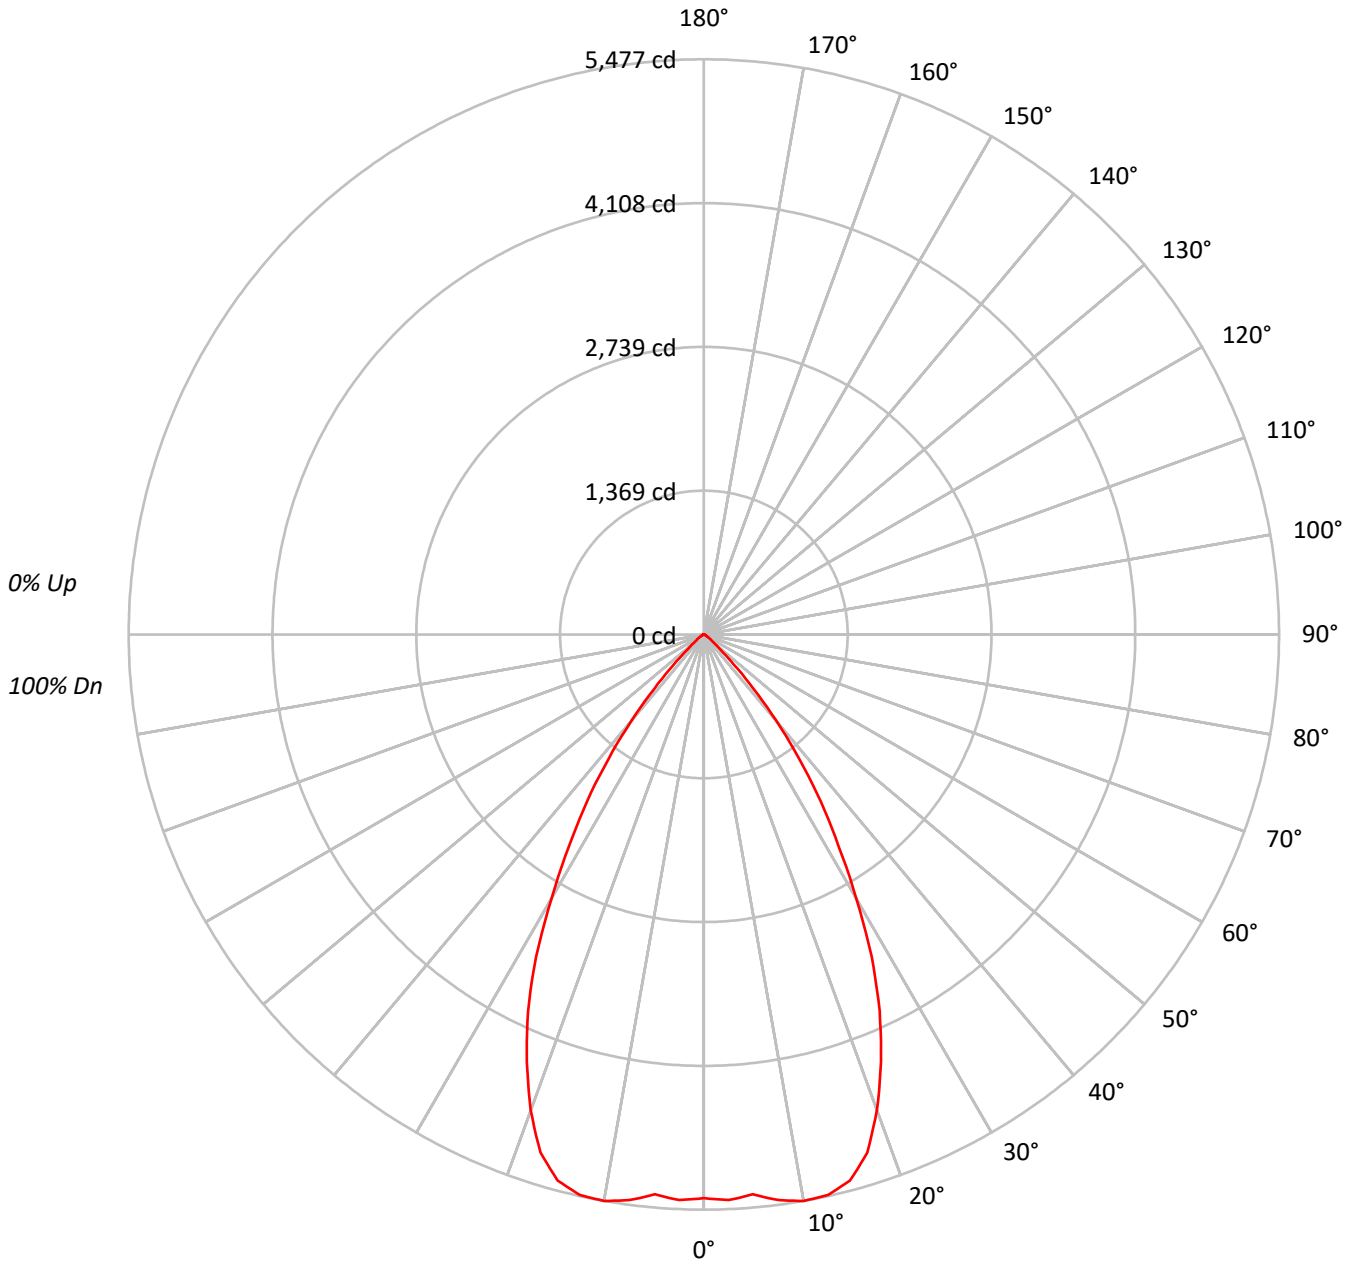



TEST NUMBER: P770827

CATALOG NUMBER: LD6D70BD010-EU6DR6570959024-6LBSQW1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93			
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87			
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	80			
4	97	89	84	79	95	88	83	79	86	82	78	84	80	77	82	79	76	75			
5	92	83	78	73	90	83	77	73	81	76	72	79	75	72	77	74	71	69			
6	87	78	72	68	86	77	72	68	76	71	67	74	70	67	73	69	66	65			
7	83	73	67	63	81	73	67	63	71	66	62	70	66	62	69	65	62	60			
8	79	69	63	59	77	68	63	59	67	62	58	66	62	58	65	61	58	57			
9	75	65	59	55	74	65	59	55	64	58	55	63	58	55	62	58	54	53			
10	71	61	56	52	70	61	55	52	60	55	51	59	55	51	59	54	51	50			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	586534
5°	587019
10°	607686
15°	608695
20°	560400
25°	477498
30°	365533
35°	258242
40°	152443
45°	61884
50°	22437
55°	12496
60°	7168
65°	3956
70°	4153
75°	3208
80°	3335
85°	2883

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 61884 cd/sqm



TEST NUMBER: P770827

CATALOG NUMBER: LD6D70BD010-EU6DR6570959024-6LBSQW1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	516.9	9.5
10°-20°	1491.1	27.3
20°-30°	1789.0	32.8
30°-40°	1202.3	22.1
40°-50°	359.9	6.6
50°-60°	63.5	1.2
60°-70°	18.1	0.3
70°-80°	8.8	0.2
80°-90°	2.8	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3797.0	69.6
0°-40°	4999.2	91.7
0°-60°	5422.6	99.5
0°-90°	5452.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5452.4	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	5368	
5°	5352	517
15°	5381	1491
25°	3961	1789
35°	1936	1202
45°	400	360
55°	66	64
65°	15	18
75°	8	9
85°	2	3
90°	0	



TEST NUMBER: P770827

CATALOG NUMBER: LD6D70BD010-EU6DR6570959024-6LBSQW1MW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	5368.2
2.5°	5391.1
5°	5352.2
7.5°	5433.1
10°	5477.3
12.5°	5466.6
15°	5381.2
17.5°	5172.2
20°	4819.7
22.5°	4404.7
25°	3960.8
27.5°	3459.6
30°	2897.3
32.5°	2387.7
35°	1936.1
37.5°	1489.9
40°	1068.8
42.5°	698.0
45°	400.5
47.5°	212.1
50°	132.0
52.5°	91.5
55°	65.6
57.5°	47.3
60°	32.8
62.5°	21.4
65°	15.3
67.5°	13.7
70°	13.0
72.5°	9.9
75°	7.6
77.5°	6.9
80°	5.3
82.5°	3.8
85°	2.3
87.5°	1.5
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)