

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P770830

Luminaire Tested: LD6D70BD010-EU6DR6570959027-6LBCSSQMW

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P770830
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D70BD010-EU6DR6570959027-6LBCSSQMW
Description: 6 INCH SQAURE SHALLOW CAST MATTE WHITE TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7023.1 lumens
Efficiency: N/A
Efficacy: 105.5 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96
Luminous Opening: Circular (Dia: 0.48' x H: 0')
CIE Type: Direct


Input Watts (W): 66.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P770830

CATALOG NUMBER: LD6D70BD010-EU6DR6570959027-6LBCSSQMW

Luminous Intensity Polar Plot

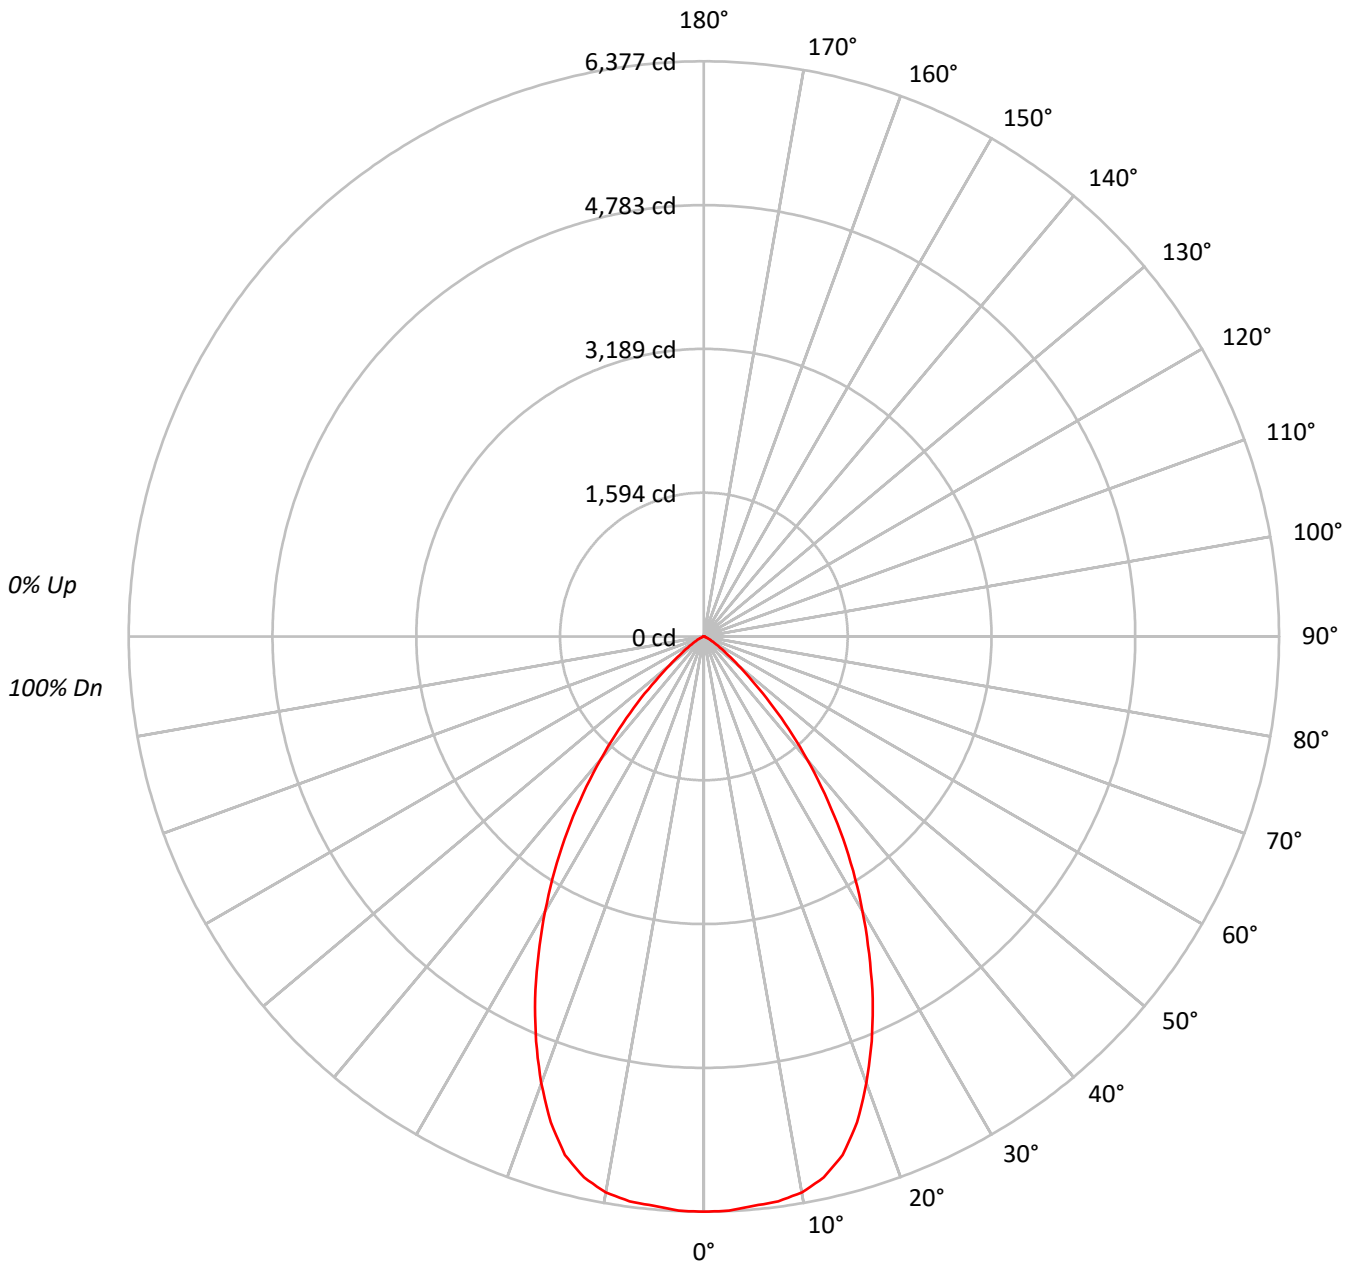



TEST NUMBER: P770830

CATALOG NUMBER: LD6D70BD010-EU6DR6570959027-6LBCSSQMW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						100													
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93						93													
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85						85													
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78						78													
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72						72													
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66						66													
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61						61													
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56						56													
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52						52													
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49						49													
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	46						46													

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	372430
5°	371490
10°	371171
15°	359731
20°	327492
25°	285386
30°	237365
35°	188077
40°	135739
45°	85759
50°	44703
55°	23756
60°	12475
65°	6868
70°	2886
75°	3182
80°	2220
85°	1876

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 85759 cd/sqm



TEST NUMBER: P770830

CATALOG NUMBER: LD6D70BD010-EU6DR6570959027-6LBCSSQMW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	603.0	8.6
10°-20°	1651.4	23.5
20°-30°	2018.5	28.7
30°-40°	1637.8	23.3
40°-50°	816.1	11.6
50°-60°	227.6	3.2
60°-70°	51.7	0.7
70°-80°	13.5	0.2
80°-90°	3.5	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4272.9	60.8
0°-40°	5910.7	84.2
0°-60°	6954.5	99.0
0°-90°	7023.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	7023.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	6377	
5°	6336	603
15°	5950	1651
25°	4429	2019
35°	2638	1638
45°	1038	816
55°	233	228
65°	50	52
75°	14	13
85°	3	3
90°	0	



TEST NUMBER: P770830

CATALOG NUMBER: LD6D70BD010-EU6DR6570959027-6LBCSSQMW

CANDELA DISTRIBUTION (FULL):

	0°
0°	6376.8
2.5°	6372.1
5°	6336.5
7.5°	6315.9
10°	6258.7
12.5°	6142.5
15°	5949.5
17.5°	5647.8
20°	5269.2
22.5°	4860.6
25°	4428.6
27.5°	3966.7
30°	3519.7
32.5°	3078.3
35°	2637.9
37.5°	2198.4
40°	1780.4
42.5°	1388.7
45°	1038.3
47.5°	723.4
50°	492.0
52.5°	339.2
55°	233.3
57.5°	157.4
60°	106.8
62.5°	74.0
65°	49.7
67.5°	25.3
70°	16.9
72.5°	15.9
75°	14.1
77.5°	9.4
80°	6.6
82.5°	4.7
85°	2.8
87.5°	1.9
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)