

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P772390

Luminaire Tested: LD6D80BD010-EU6DR6570959027-6LBCSSQMW

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P772390
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D80BD010-EU6DR6570959027-6LBCSSQMW
Description: 6 INCH SQAURE SHALLOW CAST MATTE WHITE TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 8409.8 lumens
Efficiency: N/A
Efficacy: 106.6 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96
Luminous Opening: Circular (Dia: 0.48' x H: 0')
CIE Type: Direct

Input Watts (W): 78.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P772390
CATALOG NUMBER: LD6D80BD010-EU6DR6570959027-6LBCSSQMW

Luminous Intensity Polar Plot

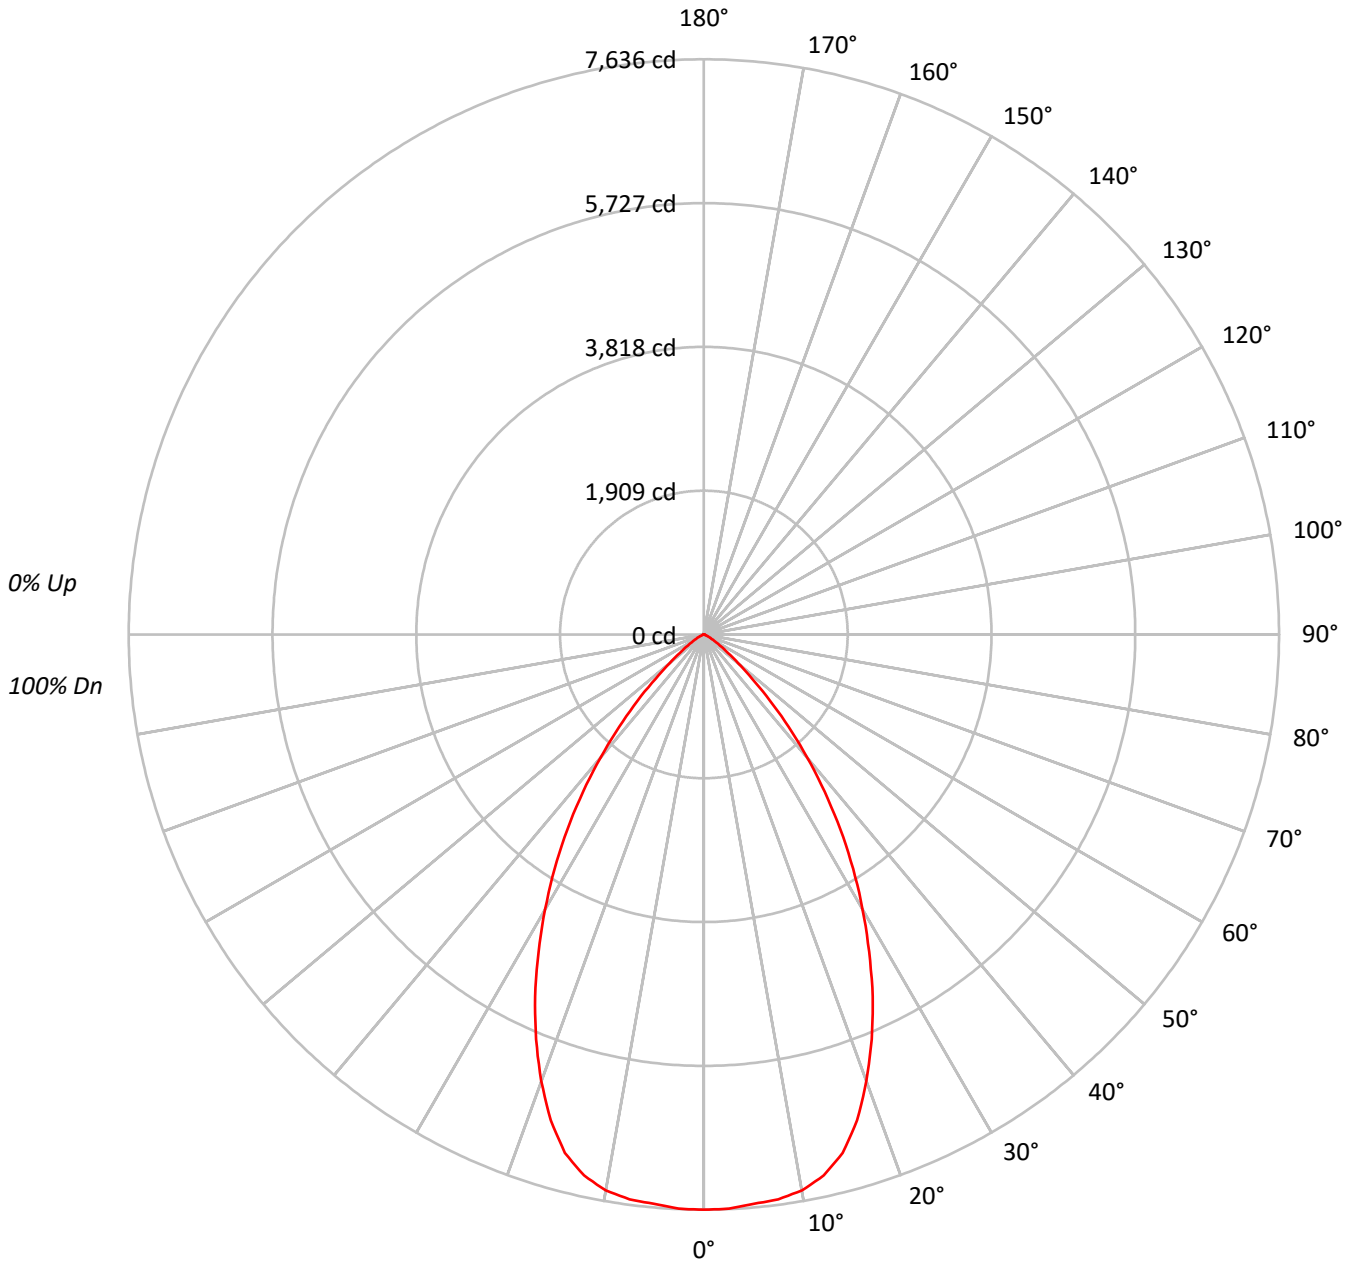



TEST NUMBER: P772390

CATALOG NUMBER: LD6D80BD010-EU6DR6570959027-6LBCSSQMW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|
| RF | 20 | | | | 20 | | | | 20 | | | | 20 | | | | 20 | | | |
| RC | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 10 | | 0 | |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 |
| RCR | | | | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 | | |
| 1 | 113 | 110 | 107 | 105 | 111 | 108 | 105 | 103 | 104 | 102 | 100 | 100 | 99 | 97 | 97 | 95 | 94 | 93 | | |
| 2 | 107 | 102 | 97 | 94 | 105 | 100 | 96 | 92 | 97 | 93 | 90 | 94 | 91 | 88 | 91 | 89 | 87 | 85 | | |
| 3 | 101 | 94 | 88 | 84 | 99 | 92 | 87 | 83 | 90 | 86 | 82 | 87 | 84 | 81 | 85 | 82 | 80 | 78 | | |
| 4 | 95 | 87 | 81 | 76 | 93 | 86 | 80 | 76 | 84 | 79 | 75 | 82 | 77 | 74 | 80 | 76 | 73 | 72 | | |
| 5 | 90 | 81 | 74 | 70 | 88 | 80 | 74 | 69 | 78 | 73 | 69 | 76 | 72 | 68 | 75 | 71 | 68 | 66 | | |
| 6 | 85 | 75 | 69 | 64 | 83 | 74 | 68 | 64 | 73 | 67 | 63 | 71 | 67 | 63 | 70 | 66 | 62 | 61 | | |
| 7 | 80 | 70 | 64 | 59 | 79 | 69 | 63 | 59 | 68 | 63 | 59 | 67 | 62 | 58 | 66 | 61 | 58 | 56 | | |
| 8 | 76 | 66 | 59 | 55 | 75 | 65 | 59 | 55 | 64 | 58 | 54 | 63 | 58 | 54 | 62 | 57 | 54 | 52 | | |
| 9 | 72 | 61 | 55 | 51 | 71 | 61 | 55 | 51 | 60 | 54 | 51 | 59 | 54 | 50 | 58 | 54 | 50 | 49 | | |
| 10 | 68 | 58 | 52 | 47 | 67 | 57 | 51 | 47 | 57 | 51 | 47 | 56 | 51 | 47 | 55 | 50 | 47 | 46 | | |

AVERAGE LUMINANCE (cd/sqm):

| | |
|-----|--------|
| | 0° |
| 0° | 445960 |
| 5° | 444838 |
| 10° | 444454 |
| 15° | 430753 |
| 20° | 392149 |
| 25° | 341733 |
| 30° | 284228 |
| 35° | 225209 |
| 40° | 162545 |
| 45° | 102691 |
| 50° | 53526 |
| 55° | 28450 |
| 60° | 14940 |
| 65° | 8223 |
| 70° | 3449 |
| 75° | 3791 |
| 80° | 2657 |
| 85° | 2278 |

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 102691 cd/sqm



TEST NUMBER: P772390

CATALOG NUMBER: LD6D80BD010-EU6DR6570959027-6LBCSSQMW

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 722.1 | 8.6 |
| 10°-20° | 1977.4 | 23.5 |
| 20°-30° | 2417.1 | 28.7 |
| 30°-40° | 1961.1 | 23.3 |
| 40°-50° | 977.3 | 11.6 |
| 50°-60° | 272.6 | 3.2 |
| 60°-70° | 61.9 | 0.7 |
| 70°-80° | 16.1 | 0.2 |
| 80°-90° | 4.1 | 0.0 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-30° | 5116.6 | 60.8 |
| 0°-40° | 7077.7 | 84.2 |
| 0°-60° | 8327.6 | 99.0 |
| 0°-90° | 8409.8 | 100.0 |
| 90°-120° | 0.0 | 0.0 |
| 90°-150° | 0.0 | 0.0 |
| 90°-180° | 0.0 | 0.0 |
| 0°-180° | 8409.8 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | Flux |
|-----|------|------|
| 0° | 7636 | |
| 5° | 7588 | 722 |
| 15° | 7124 | 1977 |
| 25° | 5303 | 2417 |
| 35° | 3159 | 1961 |
| 45° | 1243 | 977 |
| 55° | 279 | 273 |
| 65° | 60 | 62 |
| 75° | 17 | 16 |
| 85° | 3 | 4 |
| 90° | 0 | |



TEST NUMBER: P772390

CATALOG NUMBER: LD6D80BD010-EU6DR6570959027-6LBCSSQMW

CANDELA DISTRIBUTION (FULL):

| 0° | |
|-------|--------|
| 0° | 7635.8 |
| 2.5° | 7630.2 |
| 5° | 7587.6 |
| 7.5° | 7562.9 |
| 10° | 7494.4 |
| 12.5° | 7355.3 |
| 15° | 7124.1 |
| 17.5° | 6762.8 |
| 20° | 6309.5 |
| 22.5° | 5820.3 |
| 25° | 5303.0 |
| 27.5° | 4749.8 |
| 30° | 4214.6 |
| 32.5° | 3686.1 |
| 35° | 3158.7 |
| 37.5° | 2632.4 |
| 40° | 2132.0 |
| 42.5° | 1662.9 |
| 45° | 1243.3 |
| 47.5° | 866.3 |
| 50° | 589.1 |
| 52.5° | 406.2 |
| 55° | 279.4 |
| 57.5° | 188.5 |
| 60° | 127.9 |
| 62.5° | 88.6 |
| 65° | 59.5 |
| 67.5° | 30.3 |
| 70° | 20.2 |
| 72.5° | 19.1 |
| 75° | 16.8 |
| 77.5° | 11.2 |
| 80° | 7.9 |
| 82.5° | 5.6 |
| 85° | 3.4 |
| 87.5° | 2.2 |
| 90° | 0.0 |

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)