

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P772491

Luminaire Tested: LD6D80BD010-EU6DR7070959030-6LBSQW1MW

Issue Date: 2/5/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P772491  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-73)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/5/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D80BD010-EU6DR7070959030-6LBSQW1MW  
Description: 6 INCH SQAURE DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 70° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 8026.2 lumens  
Efficiency: N/A  
Efficacy: 101.7 lumens/watt  
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.82  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct


Input Watts (W): 78.9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P772491

CATALOG NUMBER: LD6D80BD010-EU6DR7070959030-6LBSQW1MW

### Luminous Intensity Polar Plot

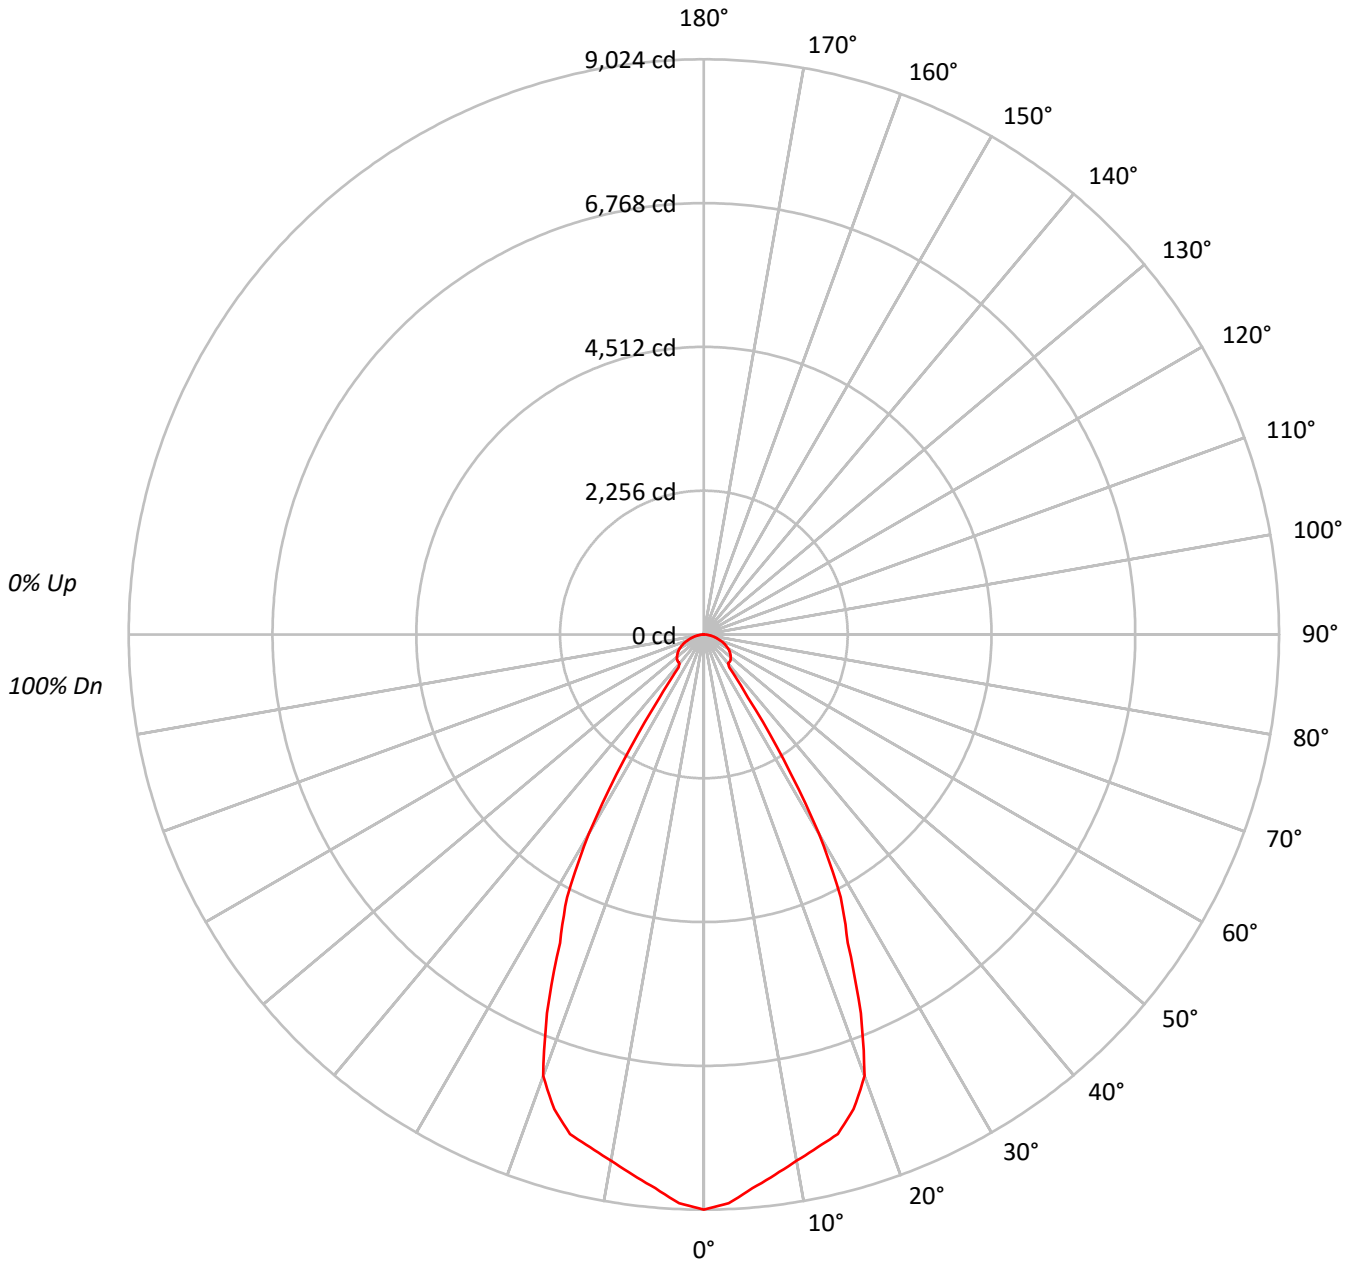



TEST NUMBER: P772491

CATALOG NUMBER: LD6D80BD010-EU6DR7070959030-6LBSQW1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	112	109	106	103	110	107	104	102	103	101	99	99	97	96	95	94	93	91																			
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	85	83																			
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	78	76																			
4	94	86	80	75	92	85	79	74	82	77	73	80	76	73	78	75	72	70																			
5	89	80	74	69	87	79	73	69	77	72	68	75	71	67	74	70	67	65																			
6	85	75	68	64	83	74	68	64	73	67	63	71	66	63	70	66	62	61																			
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57																			
8	77	66	60	56	75	66	60	56	65	59	55	64	59	55	63	58	55	53																			
9	73	63	57	52	72	62	56	52	61	56	52	60	55	52	60	55	52	50																			
10	70	59	53	49	69	59	53	49	58	53	49	57	52	49	57	52	49	48																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	985947
5°	956645
10°	929985
15°	917782
20°	857024
25°	643841
30°	455135
35°	161220
40°	84765
45°	90285
50°	93506
55°	95264
60°	95844
65°	93822
70°	88554
75°	82024
80°	72799
85°	59046

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 57.5°  
 Luminance: 95880 cd/sqm



TEST NUMBER: P772491

CATALOG NUMBER: LD6D80BD010-EU6DR7070959030-6LBSQW1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	822.7	10.3
10°-20°	2256.6	28.1
20°-30°	2485.4	31.0
30°-40°	949.6	11.8
40°-50°	448.4	5.6
50°-60°	445.8	5.6
60°-70°	356.9	4.4
70°-80°	205.1	2.6
80°-90°	55.7	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5564.7	69.3
0°-40°	6514.3	81.2
0°-60°	7408.5	92.3
0°-90°	8026.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	8026.2	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	9024	
5°	8722	823
15°	8114	2257
25°	5341	2485
35°	1209	950
45°	584	448
55°	500	446
65°	363	357
75°	194	205
85°	47	56
90°	0	



TEST NUMBER: P772491

CATALOG NUMBER: LD6D80BD010-EU6DR7070959030-6LBSQW1MW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	9023.8
2.5°	8929.5
5°	8722.3
7.5°	8549.5
10°	8382.3
12.5°	8240.9
15°	8113.7
17.5°	7806.5
20°	7370.8
22.5°	6430.7
25°	5340.6
27.5°	4649.1
30°	3607.5
32.5°	2330.2
35°	1208.7
37.5°	652.9
40°	594.3
42.5°	590.1
45°	584.3
47.5°	571.5
50°	550.1
52.5°	525.8
55°	500.1
57.5°	471.5
60°	438.6
62.5°	401.5
65°	362.9
67.5°	320.0
70°	277.2
72.5°	234.3
75°	194.3
77.5°	152.9
80°	115.7
82.5°	81.4
85°	47.1
87.5°	18.6
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)