

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P772507

Luminaire Tested: LD6D80BD010-EU6DR7070959040-6LBCSSQMW

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P772507  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-76)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D80BD010-EU6DR7070959040-6LBCSSQMW  
Description: 6 INCH SQAURE SHALLOW CAST MATTE WHITE TRIM, WITH 70° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 10250.8 lumens  
Efficiency: N/A  
Efficacy: 129.9 lumens/watt  
Spacing Criteria (0/90/45): 1.1 / 1.1 / 1.04  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 78.9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P772507  
CATALOG NUMBER: LD6D80BD010-EU6DR7070959040-6LBCSSQMW

### Luminous Intensity Polar Plot

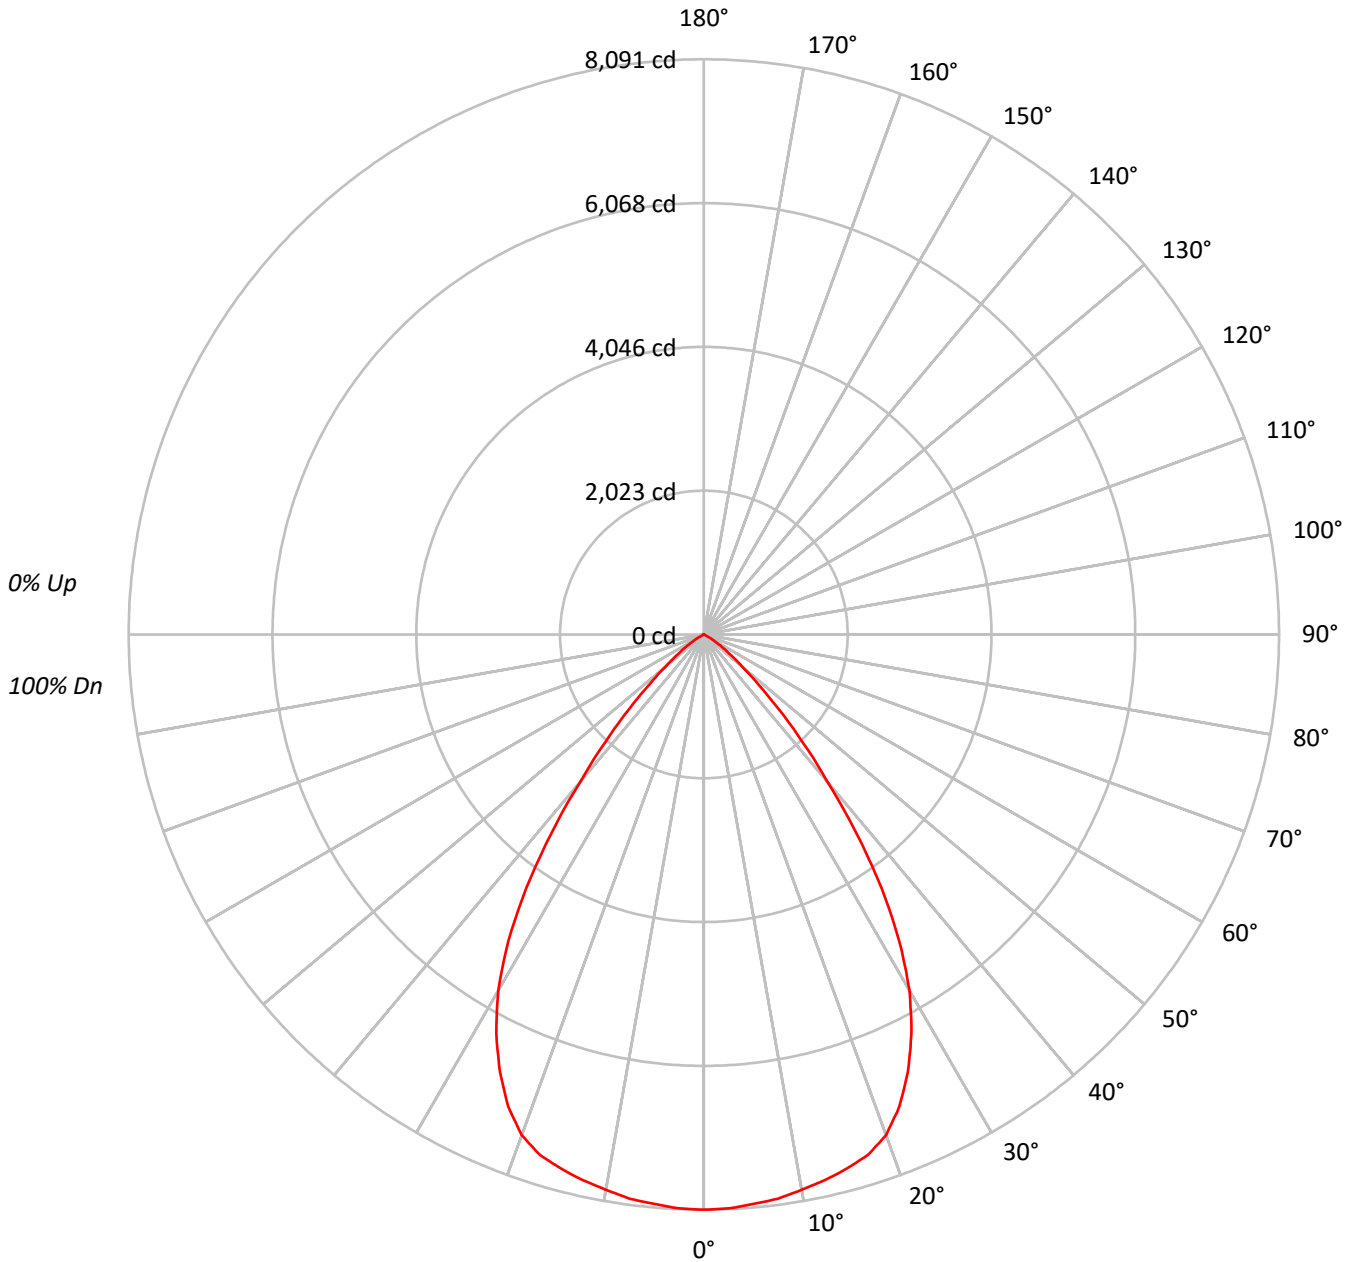



TEST NUMBER: P772507

CATALOG NUMBER: LD6D80BD010-EU6DR7070959040-6LBCSSQMW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     |     |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |     | 30  |     |     |     | 10  |     |     | 0   |     |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 0   |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 | 100 | 100 | 100 |
| 1   | 113 | 110 | 107 | 105 | 111 | 108 | 106 | 103 | 104 | 102 | 100 | 100 | 99  | 97  | 97  | 95  | 94  | 93  | 93  | 93  | 93  |
| 2   | 107 | 102 | 97  | 94  | 105 | 100 | 96  | 92  | 97  | 93  | 90  | 94  | 91  | 88  | 91  | 89  | 87  | 85  | 85  | 85  | 85  |
| 3   | 101 | 94  | 88  | 84  | 99  | 92  | 87  | 83  | 90  | 85  | 82  | 87  | 84  | 81  | 85  | 82  | 79  | 78  | 78  | 78  | 78  |
| 4   | 95  | 87  | 81  | 76  | 93  | 86  | 80  | 76  | 83  | 78  | 75  | 81  | 77  | 74  | 79  | 76  | 73  | 71  | 71  | 71  | 71  |
| 5   | 89  | 80  | 74  | 69  | 88  | 79  | 73  | 69  | 78  | 72  | 68  | 76  | 71  | 68  | 74  | 70  | 67  | 65  | 65  | 65  | 65  |
| 6   | 84  | 75  | 68  | 63  | 83  | 74  | 68  | 63  | 72  | 67  | 63  | 71  | 66  | 62  | 69  | 65  | 62  | 60  | 60  | 60  | 60  |
| 7   | 80  | 69  | 63  | 58  | 78  | 69  | 62  | 58  | 67  | 62  | 58  | 66  | 61  | 57  | 65  | 61  | 57  | 56  | 56  | 56  | 56  |
| 8   | 75  | 65  | 58  | 54  | 74  | 64  | 58  | 54  | 63  | 57  | 53  | 62  | 57  | 53  | 61  | 56  | 53  | 51  | 51  | 51  | 51  |
| 9   | 71  | 61  | 54  | 50  | 70  | 60  | 54  | 50  | 59  | 53  | 50  | 58  | 53  | 49  | 57  | 53  | 49  | 48  | 48  | 48  | 48  |
| 10  | 67  | 57  | 50  | 46  | 66  | 56  | 50  | 46  | 55  | 50  | 46  | 55  | 50  | 46  | 54  | 49  | 46  | 44  | 44  | 44  | 44  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |        |
|-----|--------|
|     | 0°     |
| 0°  | 884007 |
| 5°  | 881801 |
| 10° | 879893 |
| 15° | 879651 |
| 20° | 871047 |
| 25° | 818237 |
| 30° | 729464 |
| 35° | 581602 |
| 40° | 386184 |
| 45° | 230881 |
| 50° | 119700 |
| 55° | 62919  |
| 60° | 22245  |
| 65° | 388    |
| 70° | 0      |
| 75° | 0      |
| 80° | 0      |
| 85° | 0      |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 230881 cd/sqm



TEST NUMBER: P772507

CATALOG NUMBER: LD6D80BD010-EU6DR7070959040-6LBCSSQMW

**ZONAL LUMENS:**

| Zone      | Lumens  | % Fixture |
|-----------|---------|-----------|
| 0°-10°    | 764.6   | 7.5       |
| 10°-20°   | 2192.9  | 21.4      |
| 20°-30°   | 3093.5  | 30.2      |
| 30°-40°   | 2670.5  | 26.1      |
| 40°-50°   | 1195.9  | 11.7      |
| 50°-60°   | 313.1   | 3.1       |
| 60°-70°   | 20.4    | 0.2       |
| 70°-80°   | 0.0     | 0.0       |
| 80°-90°   | 0.0     | 0.0       |
| 90°-100°  | 0.0     | 0.0       |
| 100°-110° | 0.0     | 0.0       |
| 110°-120° | 0.0     | 0.0       |
| 120°-130° | 0.0     | 0.0       |
| 130°-140° | 0.0     | 0.0       |
| 140°-150° | 0.0     | 0.0       |
| 150°-160° | 0.0     | 0.0       |
| 160°-170° | 0.0     | 0.0       |
| 170°-180° | 0.0     | 0.0       |
| 0°-30°    | 6051.0  | 59.0      |
| 0°-40°    | 8721.5  | 85.1      |
| 0°-60°    | 10230.4 | 99.8      |
| 0°-90°    | 10250.8 | 100.0     |
| 90°-120°  | 0.0     | 0.0       |
| 90°-150°  | 0.0     | 0.0       |
| 90°-180°  | 0.0     | 0.0       |
| 0°-180°   | 10250.8 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 8091 |      |
| 5°  | 8040 | 765  |
| 15° | 7777 | 2193 |
| 25° | 6787 | 3093 |
| 35° | 4360 | 2671 |
| 45° | 1494 | 1196 |
| 55° | 330  | 313  |
| 65° | 2    | 20   |
| 75° | 0    | 0    |
| 85° | 0    | 0    |
| 90° | 0    |      |



TEST NUMBER: P772507

CATALOG NUMBER: LD6D80BD010-EU6DR7070959040-6LBCSSQMW

**CANDELA DISTRIBUTION (FULL):**

|       | 0°     |
|-------|--------|
| 0°    | 8090.8 |
| 2.5°  | 8082.1 |
| 5°    | 8039.9 |
| 7.5°  | 8005.0 |
| 10°   | 7930.8 |
| 12.5° | 7863.9 |
| 15°   | 7776.6 |
| 17.5° | 7676.2 |
| 20°   | 7491.4 |
| 22.5° | 7187.3 |
| 25°   | 6787.2 |
| 27.5° | 6323.1 |
| 30°   | 5781.9 |
| 32.5° | 5119.9 |
| 35°   | 4360.4 |
| 37.5° | 3522.4 |
| 40°   | 2707.6 |
| 42.5° | 2057.3 |
| 45°   | 1494.2 |
| 47.5° | 1030.1 |
| 50°   | 704.2  |
| 52.5° | 485.9  |
| 55°   | 330.3  |
| 57.5° | 199.3  |
| 60°   | 101.8  |
| 62.5° | 32.0   |
| 65°   | 1.5    |
| 67.5° | 0.0    |
| 70°   | 0.0    |
| 72.5° | 0.0    |
| 75°   | 0.0    |
| 77.5° | 0.0    |
| 80°   | 0.0    |
| 82.5° | 0.0    |
| 85°   | 0.0    |
| 87.5° | 0.0    |
| 90°   | 0.0    |

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)