

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P773157

Luminaire Tested: LD6D85BD010-EU6DR6570959024-6LBCSSQMW

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P773157  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D85BD010-EU6DR6570959024-6LBCSSQMW  
Description: 6 INCH SQAURE SHALLOW CAST MATTE WHITE TRIM, WITH 65° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 7903.4 lumens  
Efficiency: N/A  
Efficacy: 90.1 lumens/watt  
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96  
Luminous Opening: Circular (Dia: 0.48' x H: 0')  
CIE Type: Direct


Input Watts (W): 87.7  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P773157

CATALOG NUMBER: LD6D85BD010-EU6DR6570959024-6LBCSSQMW

### Luminous Intensity Polar Plot

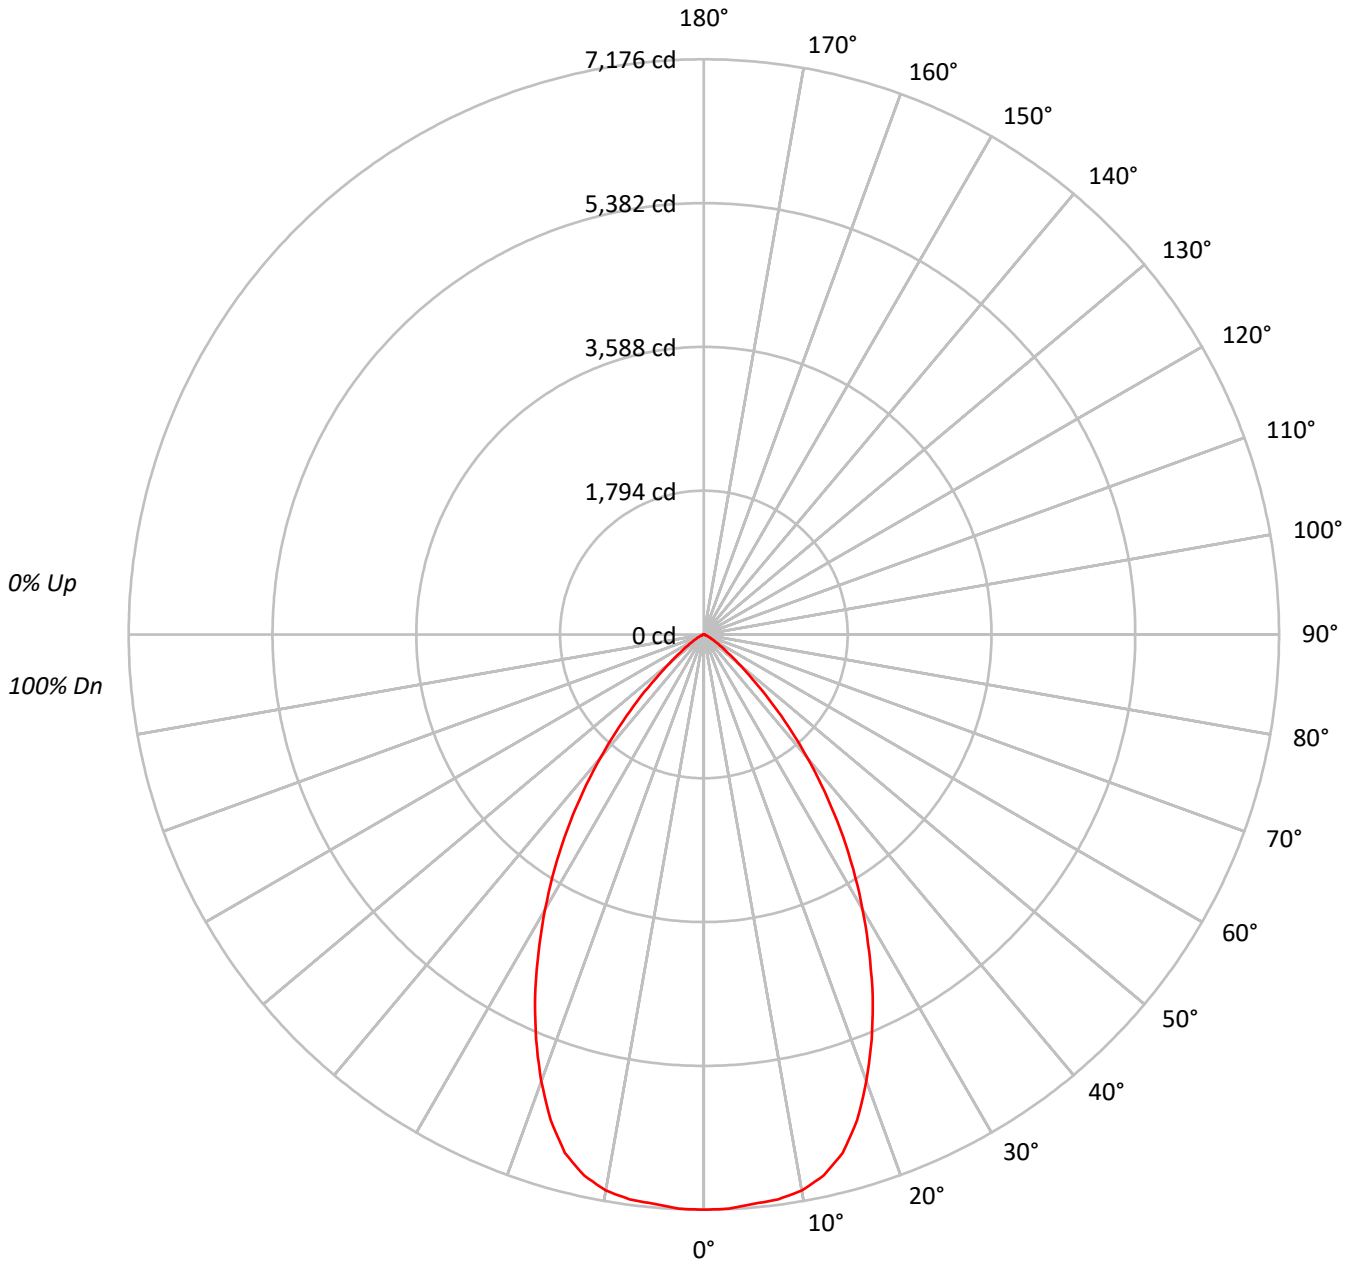



TEST NUMBER: P773157

CATALOG NUMBER: LD6D85BD010-EU6DR6570959024-6LBCSSQMW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93			93
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85			85
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78			78
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72			72
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66			66
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61			61
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56			56
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52			52
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49			49
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	46			46

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	419106
5°	418051
10°	417696
15°	404819
20°	368537
25°	321157
30°	267112
35°	211648
40°	152756
45°	96505
50°	50300
55°	26739
60°	14040
65°	7725
70°	3244
75°	3565
80°	2489
85°	2144

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 96505 cd/sqm



TEST NUMBER: P773157

CATALOG NUMBER: LD6D85BD010-EU6DR6570959024-6LBCSSQMW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	678.6	8.6
10°-20°	1858.3	23.5
20°-30°	2271.5	28.7
30°-40°	1843.0	23.3
40°-50°	918.4	11.6
50°-60°	256.2	3.2
60°-70°	58.2	0.7
70°-80°	15.1	0.2
80°-90°	3.9	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4808.5	60.8
0°-40°	6651.5	84.2
0°-60°	7826.1	99.0
0°-90°	7903.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	7903.4	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	7176	
5°	7131	679
15°	6695	1858
25°	4984	2272
35°	2968	1843
45°	1168	918
55°	263	256
65°	56	58
75°	16	15
85°	3	4
90°	0	



TEST NUMBER: P773157

CATALOG NUMBER: LD6D85BD010-EU6DR6570959024-6LBCSSQMW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	7176.0
2.5°	7170.8
5°	7130.7
7.5°	7107.5
10°	7043.2
12.5°	6912.4
15°	6695.2
17.5°	6355.6
20°	5929.6
22.5°	5469.8
25°	4983.7
27.5°	4463.8
30°	3960.8
32.5°	3464.1
35°	2968.5
37.5°	2473.9
40°	2003.6
42.5°	1562.8
45°	1168.4
47.5°	814.1
50°	553.6
52.5°	381.7
55°	262.6
57.5°	177.2
60°	120.2
62.5°	83.3
65°	55.9
67.5°	28.5
70°	19.0
72.5°	17.9
75°	15.8
77.5°	10.5
80°	7.4
82.5°	5.3
85°	3.2
87.5°	2.1
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)