

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P772702

Luminaire Tested: LD6D85BD010-EU6DR3570959027-6LBCSSQMW

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P772702
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-20)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D85BD010-EU6DR3570959027-6LBCSSQMW
Description: 6 INCH SQAURE SHALLOW CAST MATTE WHITE TRIM, WITH 35° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 9335.5 lumens
Efficiency: N/A
Efficacy: 106.4 lumens/watt
Spacing Criteria (0/90/45): 0.6 / 0.6 / 0.54
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 87.7
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P772702
CATALOG NUMBER: LD6D85BD010-EU6DR3570959027-6LBCSSQMW

Luminous Intensity Polar Plot

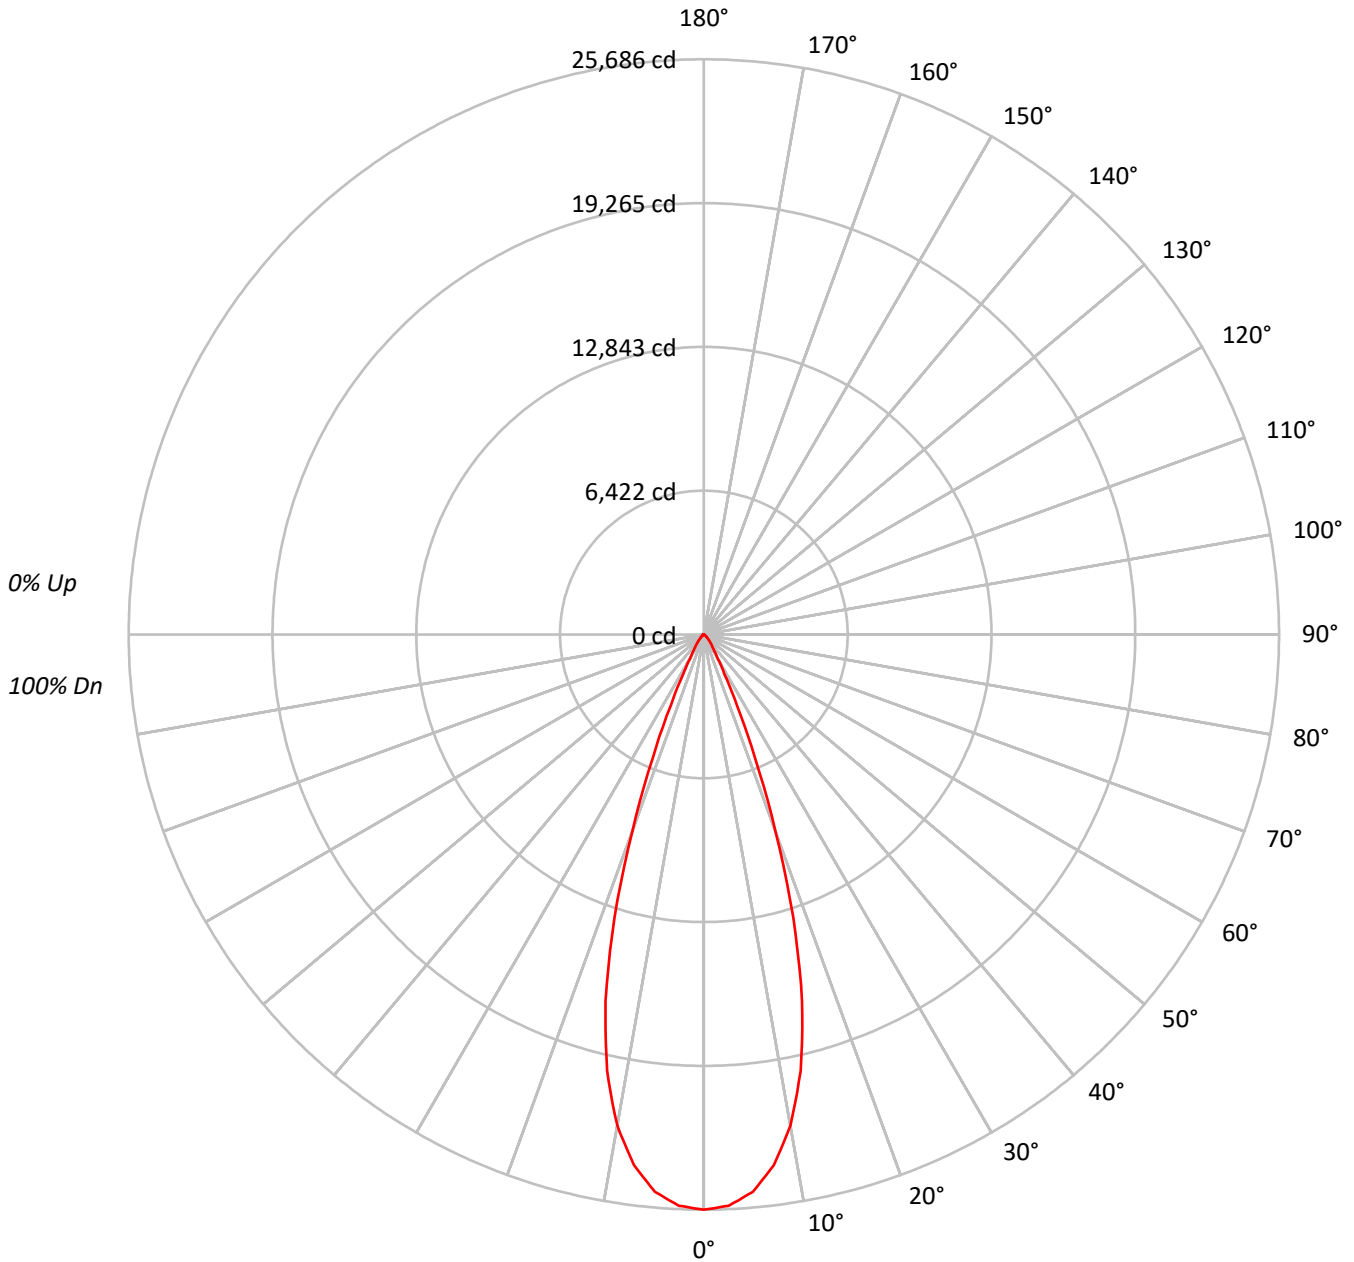



TEST NUMBER: P772702

CATALOG NUMBER: LD6D85BD010-EU6DR3570959027-6LBCSSQMW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	115	112	110	108	112	110	108	107	106	105	103	103	101	100	99	98	98	96																			
2	110	106	103	101	108	105	102	99	102	99	97	99	97	95	96	95	93	92																			
3	106	101	97	94	105	100	96	93	97	95	92	95	93	91	93	91	89	88																			
4	103	97	92	89	101	96	92	89	94	90	88	92	89	87	90	88	86	84																			
5	99	93	88	85	98	92	87	84	90	86	84	89	85	83	87	84	82	81																			
6	96	89	84	81	94	88	84	81	87	83	80	85	82	80	84	81	79	78																			
7	93	85	81	78	91	85	80	77	84	80	77	83	79	77	82	79	76	75																			
8	90	82	78	74	88	82	77	74	81	77	74	80	76	74	79	76	73	72																			
9	87	79	75	72	86	79	75	72	78	74	71	77	74	71	77	73	71	70																			
10	84	77	72	69	83	76	72	69	76	72	69	75	71	69	74	71	69	68																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	2806526
5°	2740582
10°	2469997
15°	1917108
20°	1087361
25°	423031
30°	157818
35°	86512
40°	56538
45°	34411
50°	21910
55°	15468
60°	11319
65°	6153
70°	447
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 34411 cd/sqm



TEST NUMBER: P772702

CATALOG NUMBER: LD6D85BD010-EU6DR3570959027-6LBCSSQMW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	2298.1	24.6
10°-20°	4486.9	48.1
20°-30°	1829.9	19.6
30°-40°	437.9	4.7
40°-50°	182.5	2.0
50°-60°	75.5	0.8
60°-70°	23.6	0.3
70°-80°	0.5	0.0
80°-90°	0.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	8615.0	92.3
0°-40°	9052.9	97.0
0°-60°	9310.9	99.7
0°-90°	9335.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	9335.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	25686	
5°	24988	###
15°	16948	4487
25°	3509	1830
35°	649	438
45°	223	182
55°	81	76
65°	24	24
75°	0	1
85°	0	0
90°	0	



TEST NUMBER: P772702

CATALOG NUMBER: LD6D85BD010-EU6DR3570959027-6LBCSSQMW

CANDELA DISTRIBUTION (FULL):

0°	
0°	25686.5
2.5°	25532.4
5°	24987.5
7.5°	23900.5
10°	22263.0
12.5°	19957.3
15°	16948.3
17.5°	13268.4
20°	9351.8
22.5°	5963.2
25°	3509.0
27.5°	1983.5
30°	1250.9
32.5°	878.3
35°	648.6
37.5°	501.5
40°	396.4
42.5°	305.4
45°	222.7
47.5°	166.7
50°	128.9
52.5°	102.3
55°	81.2
57.5°	65.8
60°	51.8
62.5°	37.8
65°	23.8
67.5°	8.4
70°	1.4
72.5°	1.4
75°	0.0
77.5°	0.0
80°	0.0
82.5°	1.4
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)