

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P772870

Luminaire Tested: LD6D85BD010-EU6DR4570959030-6LBCSSQMMS

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P772870  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-36)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D85BD010-EU6DR4570959030-6LBCSSQMMMS  
Description: 6 INCH SQAURE SHALLOW CAST MATTE METALLIC SILVER TRIM, WITH 45° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 10105.8 lumens  
Efficiency: N/A  
Efficacy: 115.2 lumens/watt  
Spacing Criteria (0/90/45): 0.75 / 0.75 / 0.69  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 87.7  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P772870

CATALOG NUMBER: LD6D85BD010-EU6DR4570959030-6LBCSSQMMS

### Luminous Intensity Polar Plot

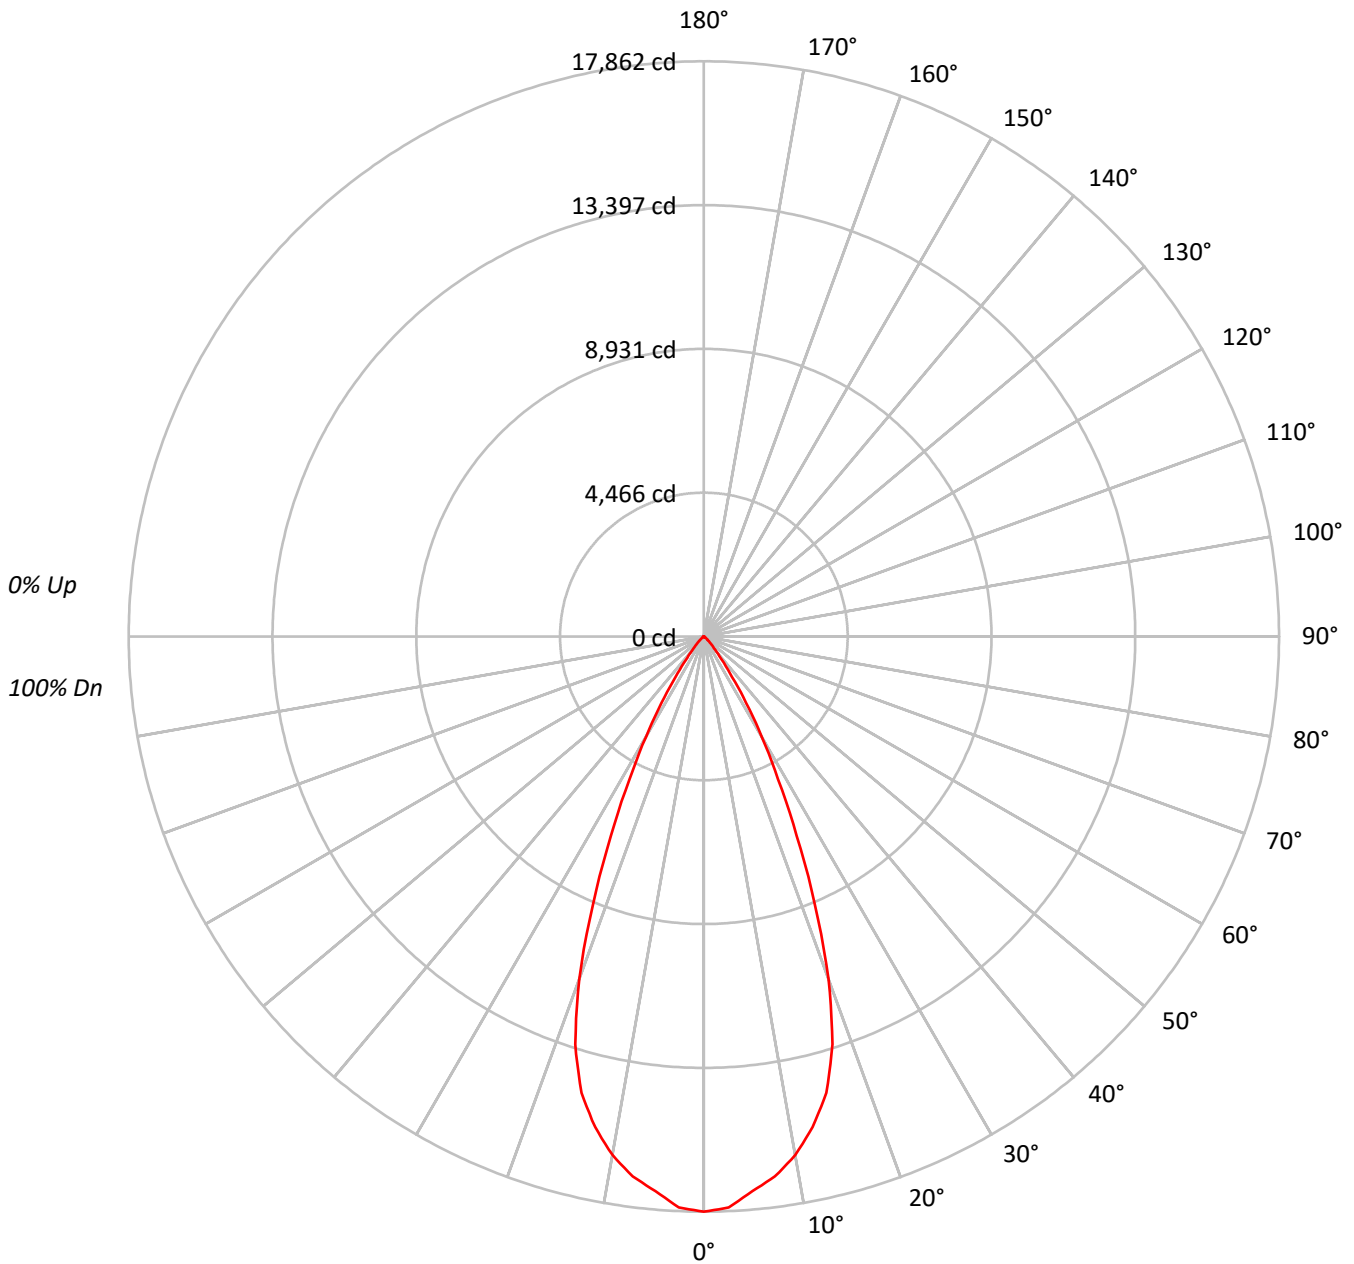



TEST NUMBER: P772870

CATALOG NUMBER: LD6D85BD010-EU6DR4570959030-6LBCSSQMMS

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	98	98	97	95	95	95	95
2	109	105	102	99	107	103	100	98	100	98	95	97	95	93	95	93	91	90	90	90	90
3	105	99	95	91	103	98	94	91	95	92	89	93	90	88	91	89	87	85	85	85	85
4	100	94	89	85	99	93	88	85	91	87	84	89	86	83	87	84	82	81	81	81	81
5	96	89	84	80	95	88	83	80	86	82	79	85	81	79	83	80	78	77	77	77	77
6	92	85	80	76	91	84	79	76	83	78	75	81	77	75	80	77	74	73	73	73	73
7	89	81	75	72	87	80	75	72	79	74	71	78	74	71	77	73	71	69	69	69	69
8	85	77	72	68	84	76	71	68	75	71	68	74	70	67	73	70	67	66	66	66	66
9	82	73	68	65	81	73	68	65	72	68	65	71	67	64	71	67	64	63	63	63	63
10	79	70	65	62	78	70	65	62	69	65	62	68	64	61	68	64	61	60	60	60	60

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	1951637
5°	1896071
10°	1814027
15°	1660212
20°	1317127
25°	822300
30°	453230
35°	203502
40°	80158
45°	37780
50°	17916
55°	9372
60°	4611
65°	1086
70°	447
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 37780 cd/sqm



TEST NUMBER: P772870

CATALOG NUMBER: LD6D85BD010-EU6DR4570959030-6LBCSSQMMS

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	1624.3	16.1
10°-20°	3997.7	39.6
20°-30°	3165.8	31.3
30°-40°	1054.2	10.4
40°-50°	209.3	2.1
50°-60°	47.5	0.5
60°-70°	6.8	0.1
70°-80°	0.2	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	8787.8	87.0
0°-40°	9842.0	97.4
0°-60°	10098.8	99.9
0°-90°	10105.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	10105.8	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	17862	
5°	17288	###
15°	14677	3998
25°	6821	3166
35°	1526	1054
45°	244	209
55°	49	48
65°	4	7
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P772870

CATALOG NUMBER: LD6D85BD010-EU6DR4570959030-6LBCSSQMMS

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	17862.2
2.5°	17745.6
5°	17287.6
7.5°	16909.7
10°	16350.5
12.5°	15605.9
15°	14677.2
17.5°	13280.8
20°	11327.9
22.5°	9001.4
25°	6820.9
27.5°	4994.5
30°	3592.4
32.5°	2443.2
35°	1525.7
37.5°	904.8
40°	562.0
42.5°	369.5
45°	244.5
47.5°	157.4
50°	105.4
52.5°	70.2
55°	49.2
57.5°	32.3
60°	21.1
62.5°	11.2
65°	4.2
67.5°	1.4
70°	1.4
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)