

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P772962

Luminaire Tested: LD6D85BD010-EU6DR5070959035-6LBCSSQMW

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P772962  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-44)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D85BD010-EU6DR5070959035-6LBCSSQMW  
Description: 6 INCH SQAURE SHALLOW CAST MATTE WHITE TRIM, WITH 50° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 10469.1 lumens  
Efficiency: N/A  
Efficacy: 119.4 lumens/watt  
Spacing Criteria (0/90/45): 0.8 / 0.8 / 0.73  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct


Input Watts (W): 87.7  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P772962

CATALOG NUMBER: LD6D85BD010-EU6DR5070959035-6LBCSSQMW

### Luminous Intensity Polar Plot

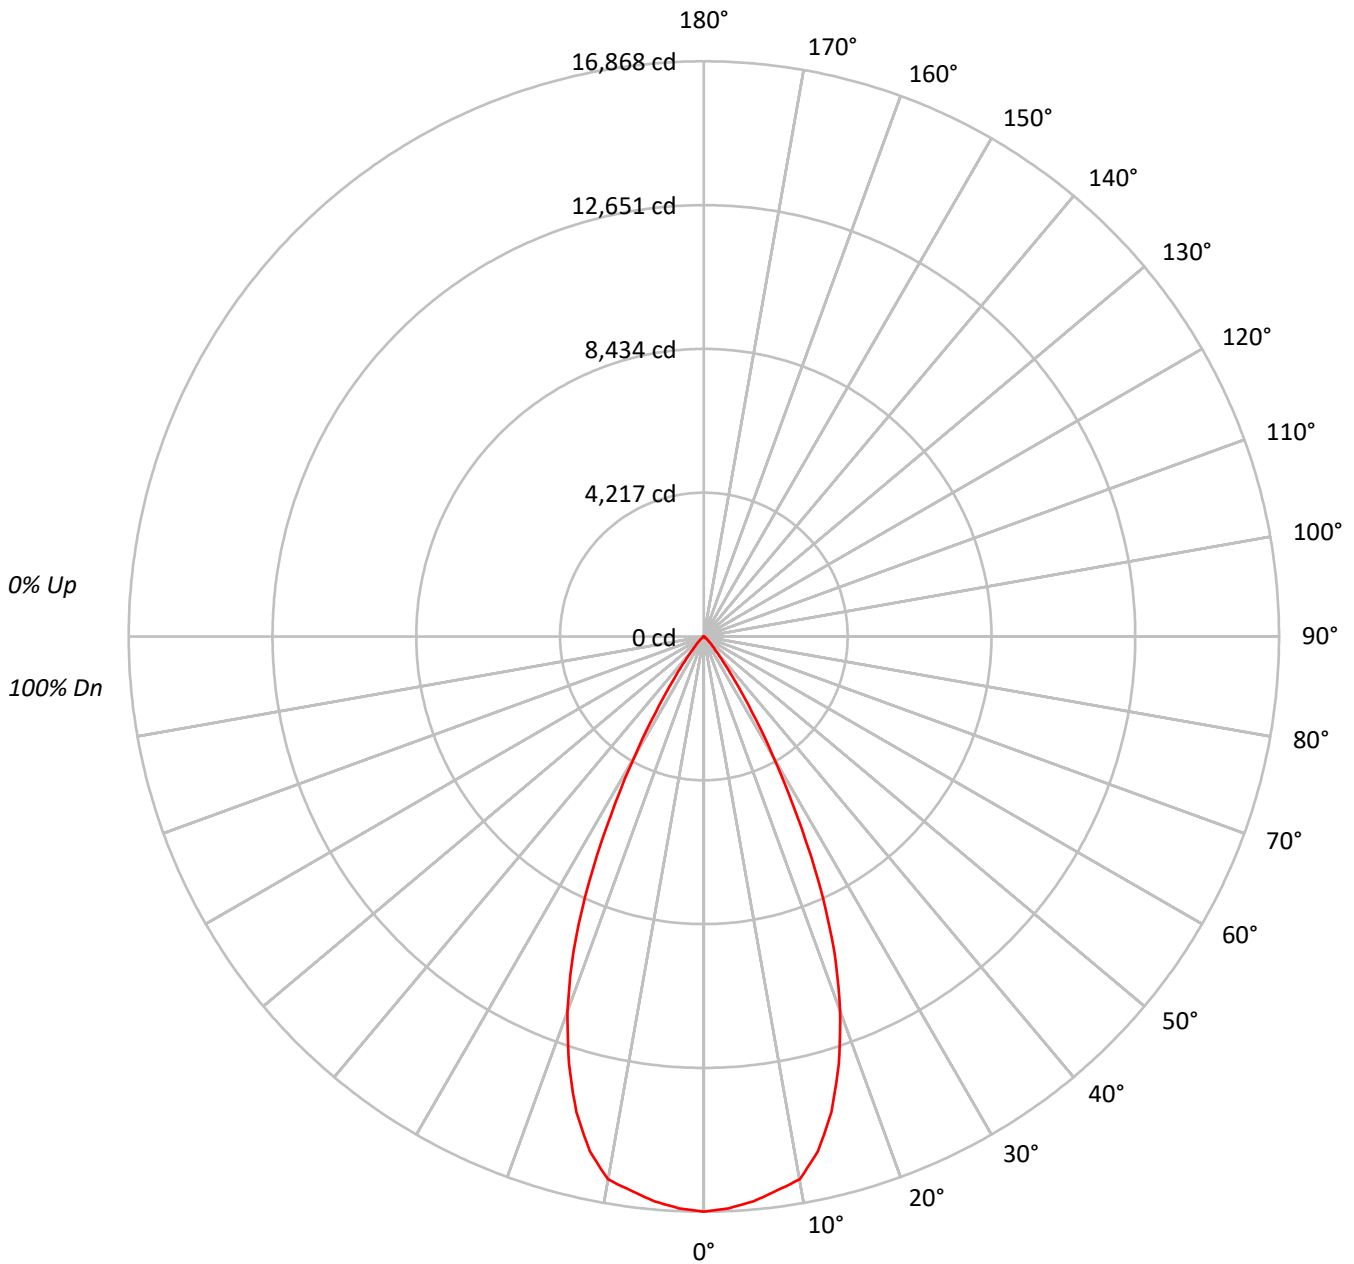



TEST NUMBER: P772962

CATALOG NUMBER: LD6D85BD010-EU6DR5070959035-6LBCSSQMW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	114	112	109	107	112	110	108	106	106	104	102	102	101	99	98	97	97	95			95																
2	109	105	101	98	107	103	100	97	100	98	95	97	95	93	95	93	91	90			90																
3	105	99	95	91	103	98	94	90	95	92	89	93	90	88	91	88	86	85			85																
4	100	94	89	85	99	93	88	85	90	87	84	89	85	83	87	84	82	80			80																
5	96	89	84	80	95	88	83	79	86	82	79	85	81	78	83	80	77	76			76																
6	92	84	79	75	91	83	79	75	82	78	74	81	77	74	79	76	74	72			72																
7	88	80	75	71	87	79	74	71	78	74	71	77	73	70	76	73	70	69			69																
8	85	76	71	67	84	76	71	67	75	70	67	74	70	67	73	69	66	65			65																
9	81	73	68	64	80	72	67	64	71	67	64	71	67	64	70	66	63	62			62																
10	78	70	64	61	77	69	64	61	68	64	61	68	64	61	67	63	60	59			59																

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	1843054
5°	1823728
10°	1793691
15°	1633302
20°	1359090
25°	964761
30°	510647
35°	208090
40°	77277
45°	35385
50°	14499
55°	7582
60°	3737
65°	1112
70°	0
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 35385 cd/sqm



TEST NUMBER: P772962

CATALOG NUMBER: LD6D85BD010-EU6DR5070959035-6LBCSSQMW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	1571.7	15.0
10°-20°	3972.0	37.9
20°-30°	3567.9	34.1
30°-40°	1117.1	10.7
40°-50°	195.6	1.9
50°-60°	39.0	0.4
60°-70°	5.9	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	9111.5	87.0
0°-40°	10228.6	97.7
0°-60°	10463.2	99.9
0°-90°	10469.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	10469.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	16868	
5°	16628	###
15°	14439	3972
25°	8003	3568
35°	1560	1117
45°	229	196
55°	40	39
65°	4	6
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P772962

CATALOG NUMBER: LD6D85BD010-EU6DR5070959035-6LBCSSQMW

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	16868.4
2.5°	16784.5
5°	16628.0
7.5°	16389.1
10°	16167.2
12.5°	15456.2
15°	14439.3
17.5°	13148.0
20°	11688.8
22.5°	10000.7
25°	8002.6
27.5°	5883.5
30°	4047.5
32.5°	2635.3
35°	1560.1
37.5°	896.0
40°	541.8
42.5°	352.7
45°	229.0
47.5°	139.4
50°	85.3
52.5°	58.3
55°	39.8
57.5°	27.0
60°	17.1
62.5°	10.0
65°	4.3
67.5°	1.4
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)