

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P774765

Luminaire Tested: LD6D95BD010-EU6DR6570959035-6LBSQW1B

Issue Date: 2/5/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P774765  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-59)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/5/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D95BD010-EU6DR6570959035-6LBSQW1B  
Description: 6 INCH SQAURE DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 65° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 7575.9 lumens  
Efficiency: N/A  
Efficacy: 76.4 lumens/watt  
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.92  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 99.2  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P774765  
CATALOG NUMBER: LD6D95BD010-EU6DR6570959035-6LBSQW1B

### Luminous Intensity Polar Plot

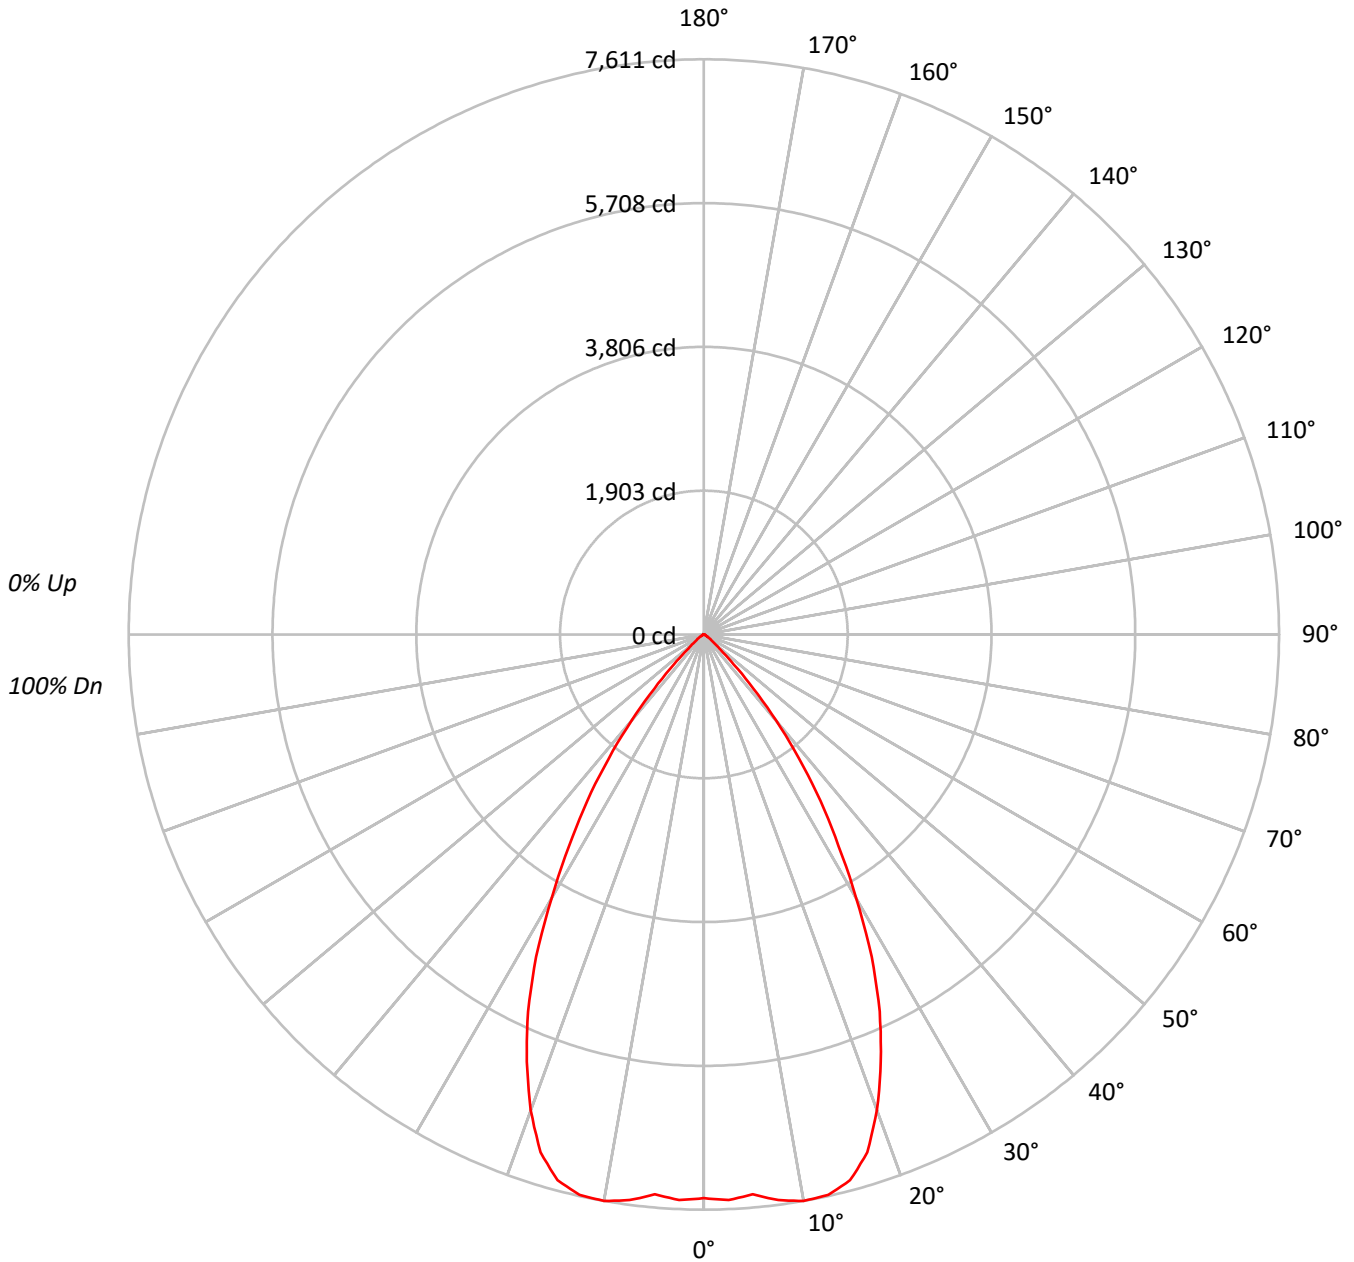



TEST NUMBER: P774765

CATALOG NUMBER: LD6D95BD010-EU6DR6570959035-6LBSQW1B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93			
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87			
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	80			
4	97	89	84	79	95	88	83	79	86	82	78	84	80	77	82	79	76	75			
5	92	83	78	73	90	83	77	73	81	76	72	79	75	72	77	74	71	69			
6	87	78	72	68	86	77	72	68	76	71	67	74	70	67	73	69	66	65			
7	83	73	67	63	81	73	67	63	71	66	62	70	66	62	69	65	62	60			
8	79	69	63	59	77	68	63	59	67	62	58	66	62	58	65	61	58	57			
9	75	65	59	55	74	65	59	55	64	58	55	63	58	55	62	58	54	53			
10	71	61	56	52	70	61	55	52	60	55	51	59	55	51	59	54	51	50			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	814976
5°	815643
10°	844368
15°	845761
20°	778668
25°	663455
30°	507909
35°	358826
40°	211805
45°	85989
50°	31174
55°	17373
60°	9965
65°	5481
70°	5750
75°	4475
80°	4656
85°	4012

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 85989 cd/sqm



TEST NUMBER: P774765

CATALOG NUMBER: LD6D95BD010-EU6DR6570959035-6LBSQW1B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	718.2	9.5
10°-20°	2071.8	27.3
20°-30°	2485.7	32.8
30°-40°	1670.5	22.1
40°-50°	500.1	6.6
50°-60°	88.3	1.2
60°-70°	25.1	0.3
70°-80°	12.3	0.2
80°-90°	3.9	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5275.8	69.6
0°-40°	6946.3	91.7
0°-60°	7534.6	99.5
0°-90°	7575.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	7575.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	7459	
5°	7437	718
15°	7477	2072
25°	5503	2486
35°	2690	1670
45°	556	500
55°	91	88
65°	21	25
75°	11	12
85°	3	4
90°	0	



TEST NUMBER: P774765

CATALOG NUMBER: LD6D95BD010-EU6DR6570959035-6LBSQW1B

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	7459.0
2.5°	7490.8
5°	7436.7
7.5°	7549.1
10°	7610.6
12.5°	7595.7
15°	7477.0
17.5°	7186.6
20°	6696.9
22.5°	6120.2
25°	5503.3
27.5°	4806.9
30°	4025.8
32.5°	3317.7
35°	2690.2
37.5°	2070.1
40°	1485.0
42.5°	969.9
45°	556.5
47.5°	294.7
50°	183.4
52.5°	127.2
55°	91.2
57.5°	65.7
60°	45.6
62.5°	29.7
65°	21.2
67.5°	19.1
70°	18.0
72.5°	13.8
75°	10.6
77.5°	9.5
80°	7.4
82.5°	5.3
85°	3.2
87.5°	2.1
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)