

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P774846

Luminaire Tested: LD6D95BD010-EU6DR7070959040-6LBCSSQMMS

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P774846
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-76)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D95BD010-EU6DR7070959040-6LBCSSQMMMS
Description: 6 INCH SQAURE SHALLOW CAST MATTE METALLIC SILVER TRIM, WITH 70° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 11741.6 lumens
Efficiency: N/A
Efficacy: 118.4 lumens/watt
Spacing Criteria (0/90/45): 1.1 / 1.1 / 1.04
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 99.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P774846
CATALOG NUMBER: LD6D95BD010-EU6DR7070959040-6LBCSSQMMS

Luminous Intensity Polar Plot

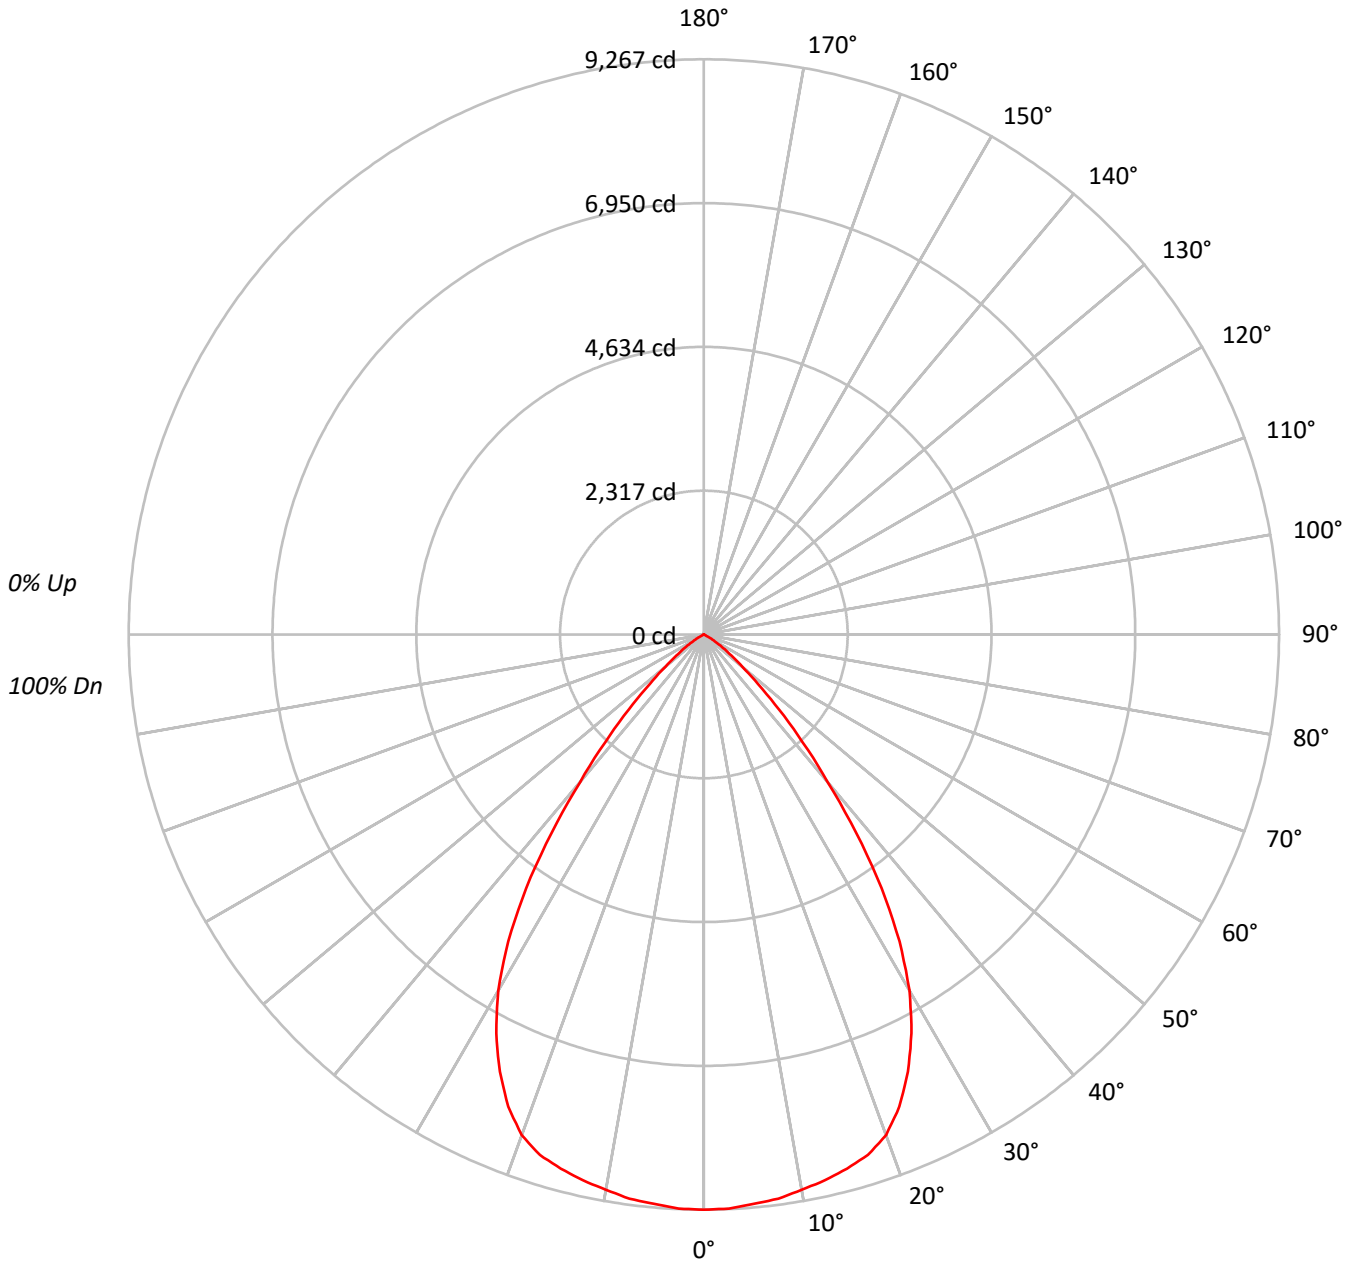



TEST NUMBER: P774846

CATALOG NUMBER: LD6D95BD010-EU6DR7070959040-6LBCSSQMMMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	113	110	107	105	111	108	106	103	104	102	100	100	99	97	97	95	94	93
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85
3	101	94	88	84	99	92	87	83	90	85	82	87	84	81	85	82	79	78
4	95	87	81	76	93	86	80	76	83	78	75	81	77	74	79	76	73	71
5	89	80	74	69	88	79	73	69	78	72	68	76	71	68	74	70	67	65
6	84	75	68	63	83	74	68	63	72	67	63	71	66	62	69	65	62	60
7	80	69	63	58	78	69	62	58	67	62	58	66	61	57	65	61	57	56
8	75	65	58	54	74	64	58	54	63	57	53	62	57	53	61	56	53	51
9	71	61	54	50	70	60	54	50	59	53	50	58	53	49	57	53	49	48
10	67	57	50	46	66	56	50	46	55	50	46	55	50	46	54	49	46	44

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1012563
5°	1010037
10°	1007847
15°	1007572
20°	997714
25°	937238
30°	835543
35°	666180
40°	442352
45°	264458
50°	137106
55°	72062
60°	25501
65°	440
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 264458 cd/sqm



TEST NUMBER: P774846

CATALOG NUMBER: LD6D95BD010-EU6DR7070959040-6LBCSSQMMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	875.8	7.5
10°-20°	2511.8	21.4
20°-30°	3543.4	30.2
30°-40°	3058.8	26.1
40°-50°	1369.8	11.7
50°-60°	358.6	3.1
60°-70°	23.4	0.2
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	6930.9	59.0
0°-40°	9989.7	85.1
0°-60°	11718.2	99.8
0°-90°	11741.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	11741.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	9267	
5°	9209	876
15°	8908	2512
25°	7774	3543
35°	4994	3059
45°	1712	1370
55°	378	359
65°	2	23
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P774846

CATALOG NUMBER: LD6D95BD010-EU6DR7070959040-6LBCSSQMMS

CANDELA DISTRIBUTION (FULL):

0°	
0°	9267.4
2.5°	9257.4
5°	9209.1
7.5°	9169.1
10°	9084.1
12.5°	9007.5
15°	8907.5
17.5°	8792.5
20°	8580.8
22.5°	8232.5
25°	7774.3
27.5°	7242.6
30°	6622.7
32.5°	5864.4
35°	4994.5
37.5°	4034.6
40°	3101.4
42.5°	2356.4
45°	1711.5
47.5°	1179.9
50°	806.6
52.5°	556.6
55°	378.3
57.5°	228.3
60°	116.7
62.5°	36.7
65°	1.7
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)