

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P202700

Luminaire Tested: **LD6B10D010 EU6B10209024 6LBWH1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P202700  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LD6B10D010 EU6B10209024 6LBWH1  
Description: PORTFOLIO 6 INCH 60 DEGREE CUTOFF RECESSED DOWNLIGHT  
WIDE DISTRIBUTION WITH SEMI-SPECULAR CLEAR TRIM  
WATTAGE D010TR-10.05 W DE010-10.58 W D5LT-10.2 W DMX-10.6 W DL2-11.8 W  
DL3-11.1 W DLE-11.39 W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 679.1 lumens  
Efficiency: N/A  
Efficacy: 68.6 lumens/watt  
Spacing Criteria (0/90/45): 1.16 / 1.16 / 1.16  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 9.9  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P202700

CATALOG NUMBER: LD6B10D010 EU6B10209024 6LBWH1

### Luminous Intensity Polar Plot

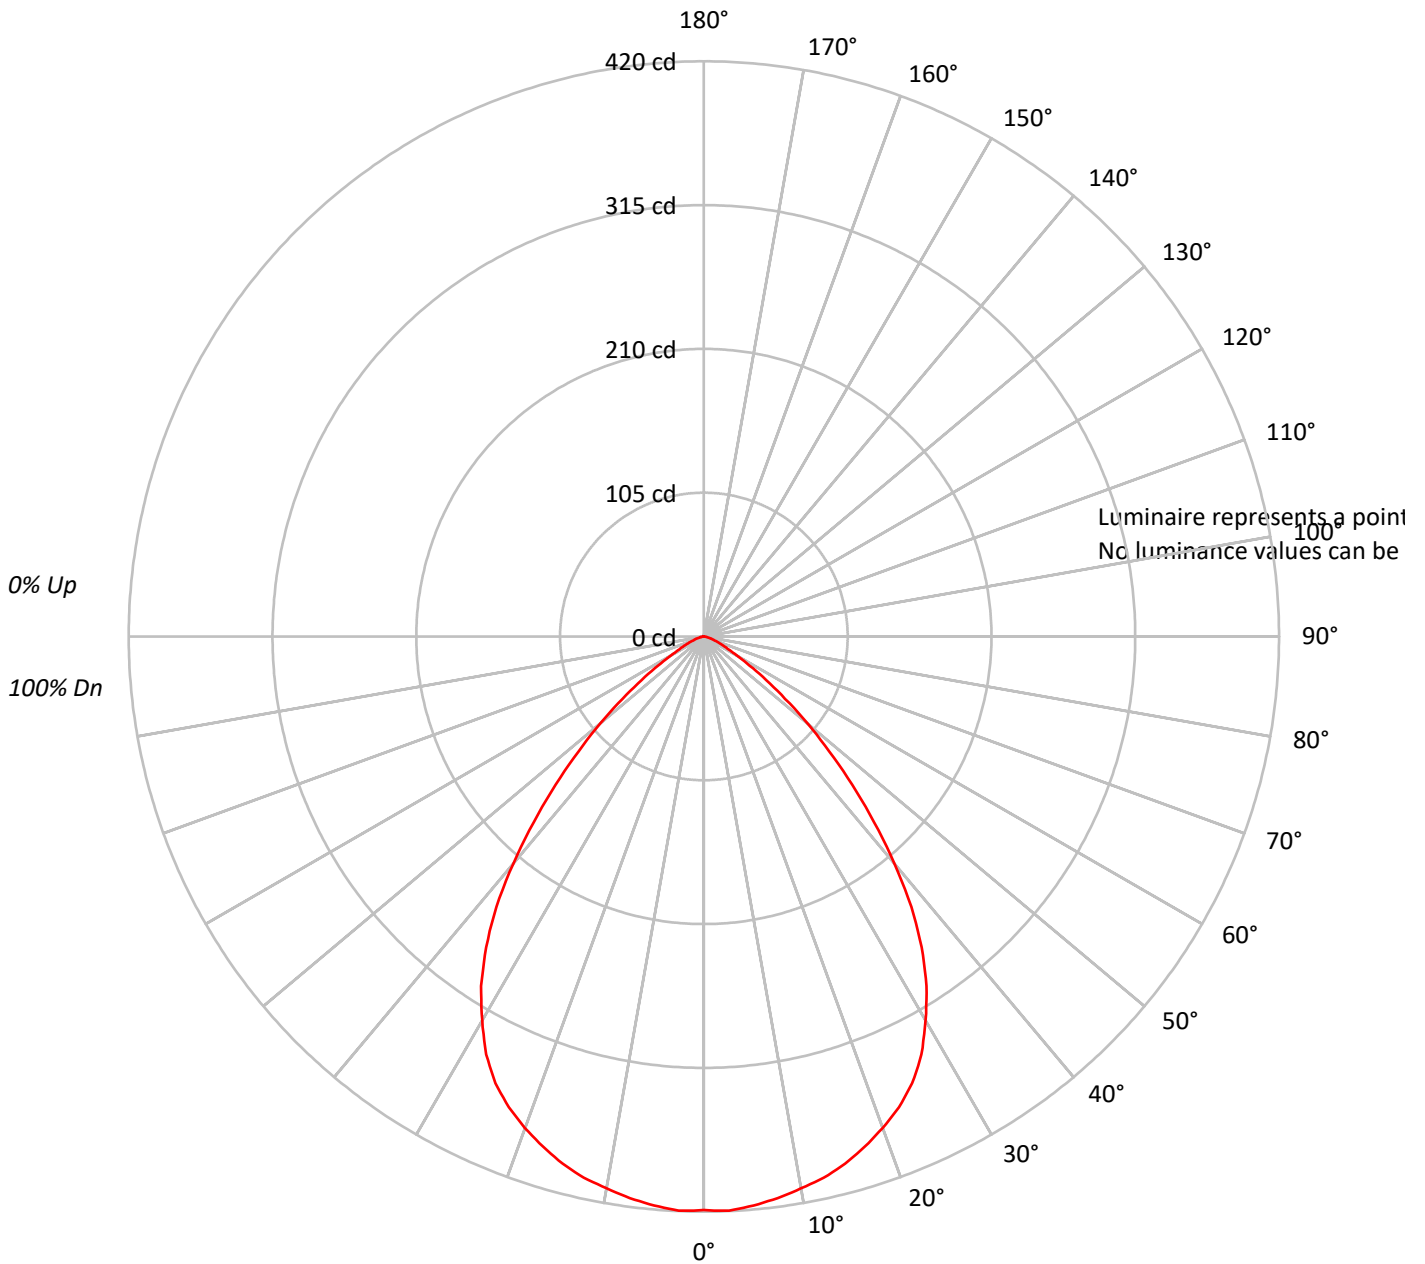



TEST NUMBER: P202700

CATALOG NUMBER: LD6B10D010 EU6B10209024 6LBWH1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	112	109	106	103	110	107	104	101	103	100	98	99	97	95	95	94	93	91			
2	105	99	94	90	103	97	93	89	94	90	87	91	88	85	88	85	83	81			
3	98	90	84	79	96	89	83	78	86	81	77	83	79	76	81	78	75	73			
4	92	82	75	70	90	81	75	70	79	73	69	77	72	68	75	71	67	65			
5	86	75	68	63	84	74	68	63	72	66	62	71	65	61	69	64	61	59			
6	80	69	62	57	78	68	61	56	67	61	56	65	60	56	64	59	55	53			
7	75	64	56	51	73	63	56	51	62	55	51	60	55	51	59	54	50	49			
8	70	59	52	47	69	58	51	47	57	51	46	56	50	46	55	50	46	44			
9	66	55	48	43	65	54	47	43	53	47	43	52	47	42	51	46	42	41			
10	62	51	44	40	61	50	44	39	50	43	39	49	43	39	48	43	39	38			

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P202700

CATALOG NUMBER: LD6B10D010 EU6B10209024 6LBWH1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	39.6	5.8
10°-20°	112.3	16.5
20°-30°	164.6	24.2
30°-40°	171.3	25.2
40°-50°	118.5	17.5
50°-60°	51.6	7.6
60°-70°	15.8	2.3
70°-80°	4.7	0.7
80°-90°	0.7	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	316.4	46.6
0°-40°	487.7	71.8
0°-60°	657.8	96.9
0°-90°	679.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	679.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	419	
5°	417	40
15°	399	112
25°	360	165
35°	277	171
45°	153	119
55°	55	52
65°	15	16
75°	4	5
85°	1	1
90°	0	



TEST NUMBER: P202700

CATALOG NUMBER: LD6B10D010 EU6B10209024 6LBWH1

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	418.9
2.5°	419.7
5°	417.1
7.5°	413.6
10°	409.2
12.5°	404.8
15°	398.6
17.5°	390.7
20°	381.9
22.5°	372.2
25°	359.9
27.5°	344.1
30°	323.8
32.5°	302.7
35°	277.2
37.5°	249.0
40°	216.5
42.5°	183.9
45°	153.1
47.5°	124.1
50°	98.6
52.5°	74.8
55°	55.4
57.5°	39.6
60°	27.3
62.5°	20.2
65°	15.0
67.5°	11.4
70°	7.9
72.5°	6.2
75°	4.4
77.5°	2.6
80°	1.8
82.5°	0.9
85°	0.9
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)