

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P35130

Luminaire Tested: **LD6B10D010 EU6B10209027 6LBNH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P35130
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD6B10D010 EU6B10209027 6LBNH1
Description: PORTFOLIO 6 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT
NARROW DISTRIBUTION WITH SEMI-SPECULAR CLEAR TRIM
WATTAGE D010TR-10.05 W DE010-10.58 W D5LT-10.2 W DMX-10.6 W DL2-11.8 W
DL3-11.1 W DLE-11.39 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 548.4 lumens
Efficiency: N/A
Efficacy: 56.5 lumens/watt
Spacing Criteria (0/90/45): 0.78 / 0.78 / 0.84
Luminous Opening: Circular (Dia: 0.46' x H: 0')
CIE Type: Direct


Input Watts (W): 9.7
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P35130

CATALOG NUMBER: LD6B10D010 EU6B10209027 6LBNH1

Luminous Intensity Polar Plot

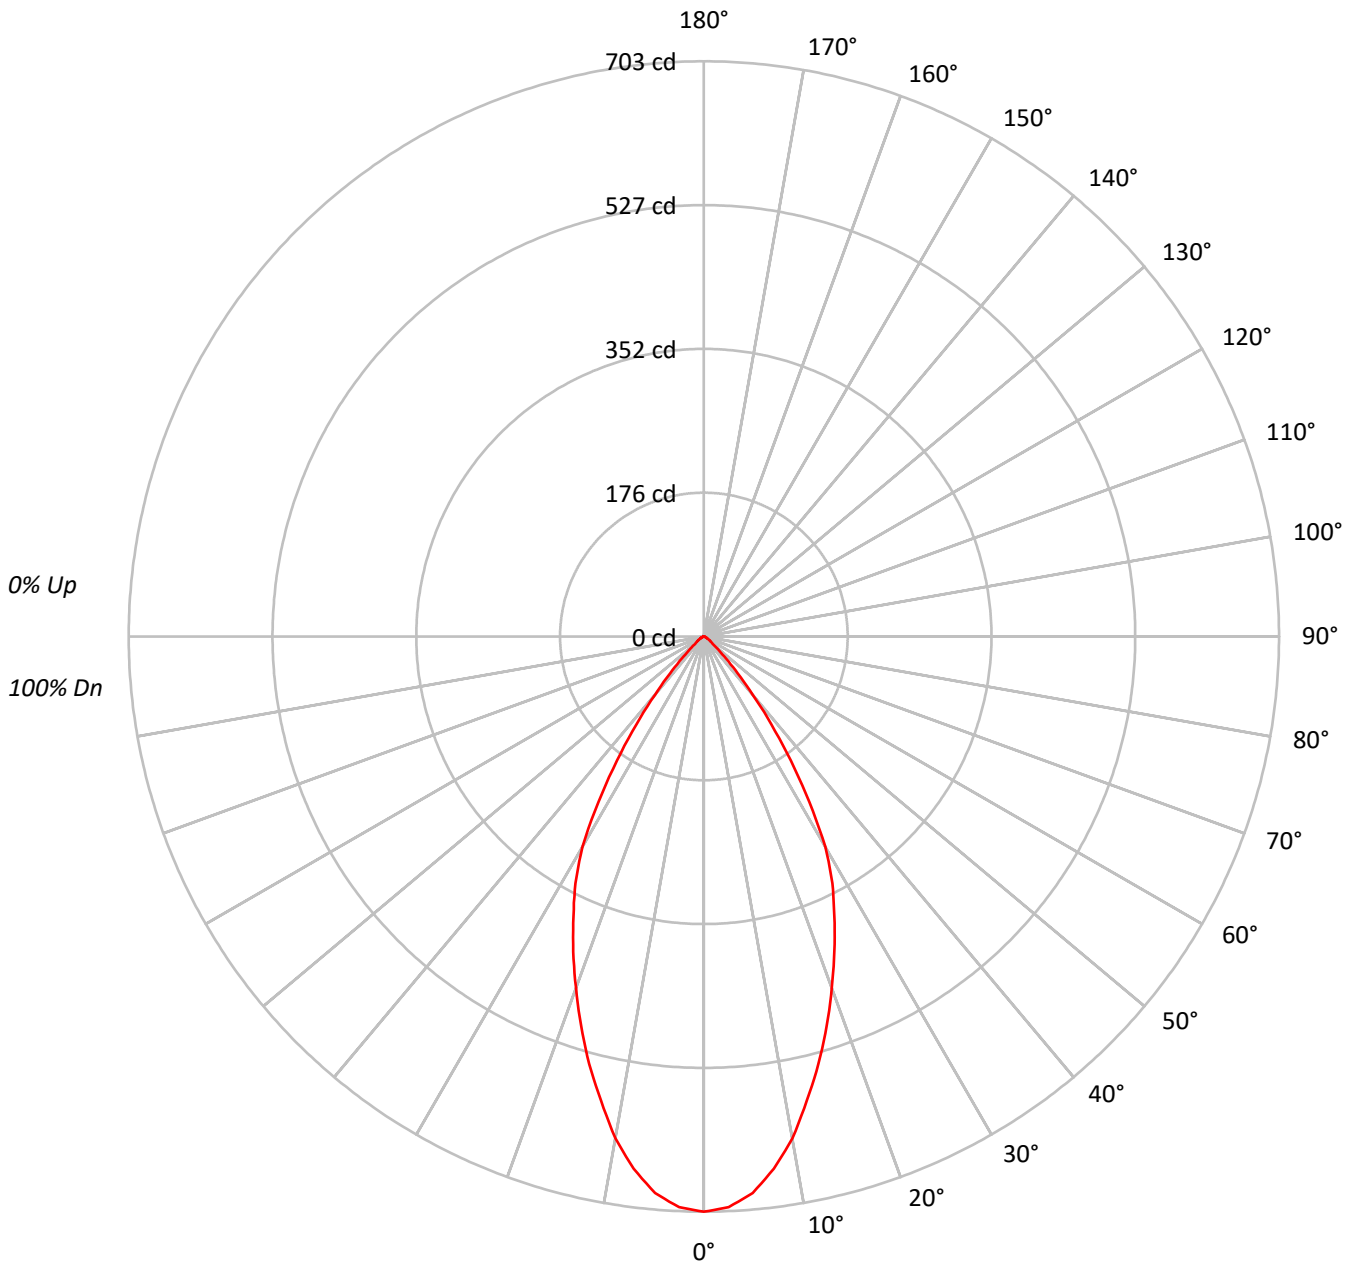



TEST NUMBER: P35130

CATALOG NUMBER: LD6B10D010 EU6B10209027 6LBNH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	111	108	106	111	109	106	104	104	103	101	101	99	98	97	96	95	93			
2	108	103	99	96	106	101	98	94	98	95	92	95	93	90	92	90	89	87			
3	102	96	91	87	100	95	90	86	92	88	85	90	86	84	87	85	82	81			
4	97	90	84	80	95	89	83	79	86	82	78	84	81	78	83	79	77	75			
5	92	84	78	74	91	83	78	73	81	76	73	80	75	72	78	74	72	70			
6	88	79	73	69	86	78	72	68	77	72	68	75	71	67	74	70	67	65			
7	83	74	68	64	82	73	68	64	72	67	63	71	66	63	70	66	63	61			
8	79	70	64	60	78	69	64	60	68	63	59	67	63	59	66	62	59	58			
9	76	66	60	56	75	66	60	56	65	59	56	64	59	56	63	59	55	54			
10	72	62	57	53	71	62	57	53	61	56	53	60	56	52	60	55	52	51			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	45864
5°	44730
10°	41272
15°	36540
20°	31728
25°	27138
30°	22374
35°	14734
40°	7920
45°	3506
50°	1421
55°	1024
60°	652
65°	463
70°	382
75°	252
80°	376
85°	0



TEST NUMBER: P35130

CATALOG NUMBER: LD6B10D010 EU6B10209027 6LBNH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	63.2	11.5
10°-20°	150.8	27.5
20°-30°	172.7	31.5
30°-40°	116.0	21.2
40°-50°	33.2	6.0
50°-60°	8.1	1.5
60°-70°	3.1	0.6
70°-80°	1.2	0.2
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	386.7	70.5
0°-40°	502.7	91.7
0°-60°	544.0	99.2
0°-90°	548.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	548.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	703	
5°	683	63
15°	541	151
25°	377	173
35°	185	116
45°	38	33
55°	9	8
65°	3	3
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P35130

CATALOG NUMBER: LD6B10D010 EU6B10209027 6LBNH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	703
2.5°	698
5°	683
7.5°	656
10°	623
12.5°	581
15°	541
17.5°	499
20°	457
22.5°	417
25°	377
27.5°	340
30°	297
32.5°	240
35°	185
37.5°	135
40°	93
42.5°	61
45°	38
47.5°	23
50°	14
52.5°	11
55°	9
57.5°	7
60°	5
62.5°	4
65°	3
67.5°	2
70°	2
72.5°	1
75°	1
77.5°	1
80°	1
82.5°	0
85°	0
87.5°	0
90°	0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)