

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P203838

Luminaire Tested: **LD6B10D010 EU6B10209727 6LBNGPH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P203838
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD6B10D010 EU6B10209727 6LBNGPH1
Description: PORTFOLIO 6 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT
NARROW DISTRIBUTION WITH GRAPHITE HAZE TRIM
WATTAGE D010TR-10.05 W DE010-10.58 W D5LT-10.2 W DMX-10.6 W DL2-11.8 W
DL3-11.1 W DLE-11.39 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 381.8 lumens
Efficiency: N/A
Efficacy: 38.6 lumens/watt
Spacing Criteria (0/90/45): 0.84 / 0.84 / 0.88
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 9.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P203838

CATALOG NUMBER: LD6B10D010 EU6B10209727 6LBNGPH1

Luminous Intensity Polar Plot

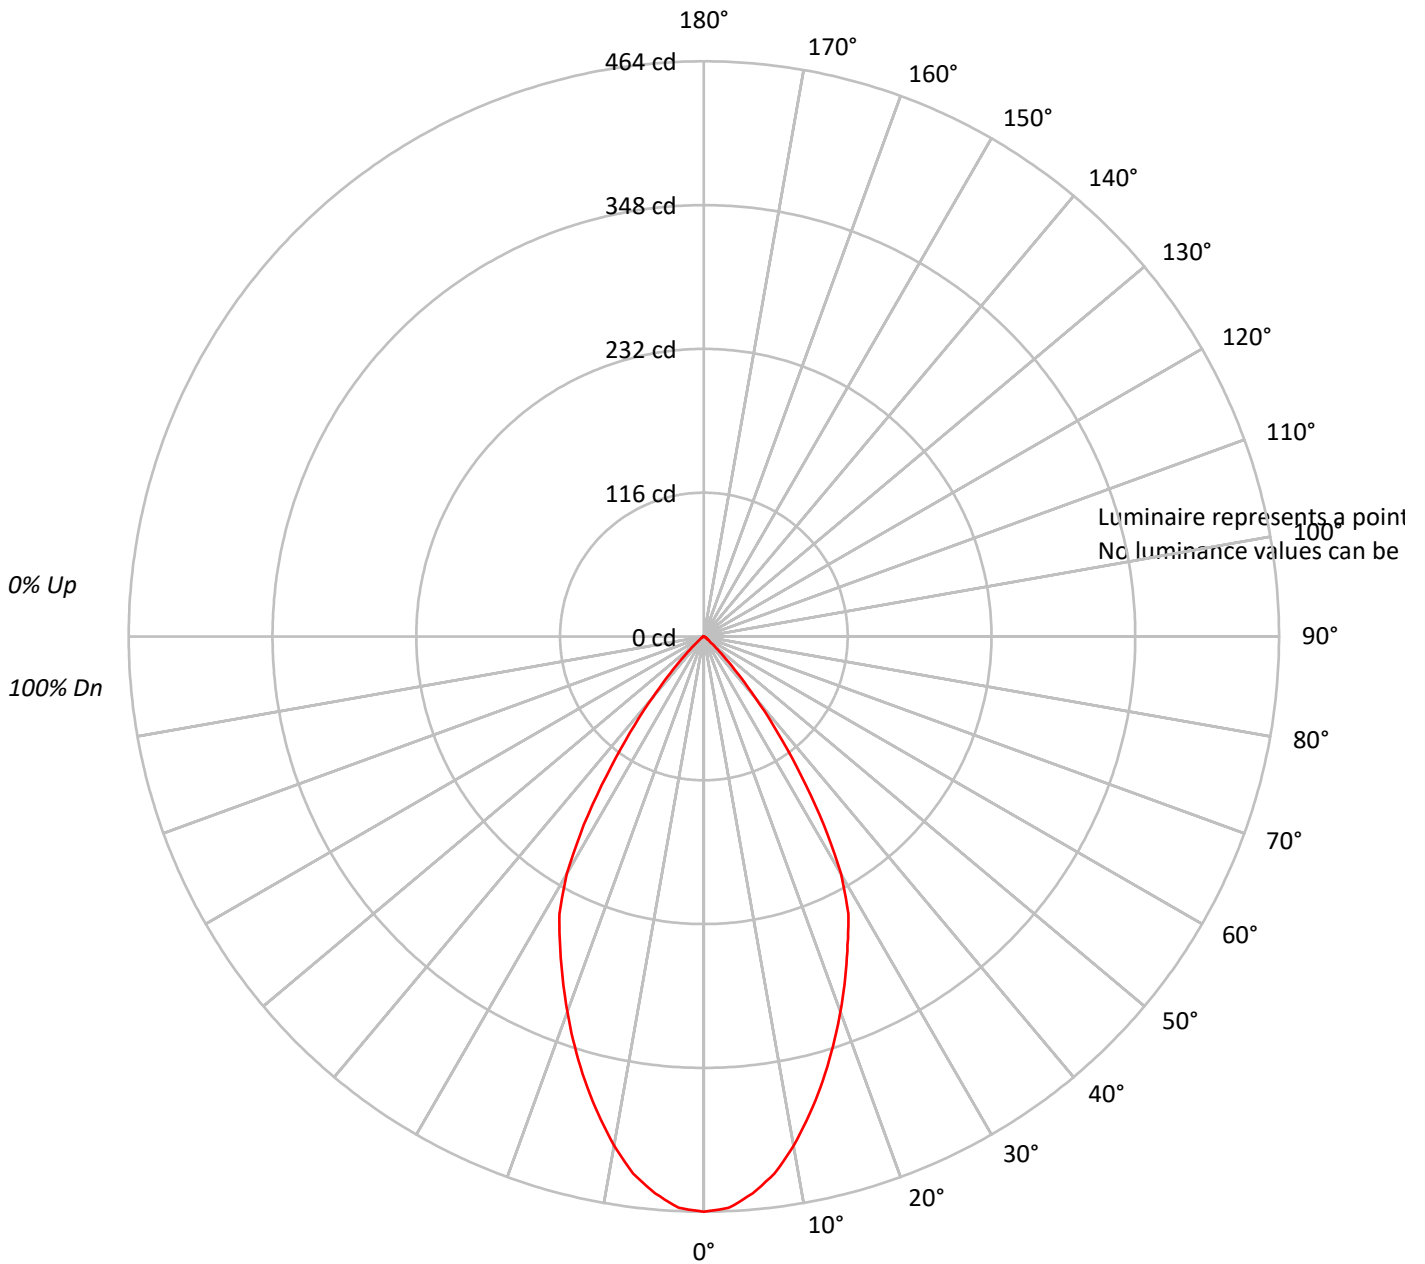



TEST NUMBER: P203838

CATALOG NUMBER: LD6B10D010 EU6B10209727 6LBNGPH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20																		
RC	80									70									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																														
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																												
1	114	111	108	106	111	109	106	104	105	103	101	101	100	98	97	96	95	94																												
2	108	103	99	96	106	101	98	95	98	95	93	95	93	91	92	91	89	87																												
3	103	96	91	87	101	95	90	87	92	88	85	90	87	84	88	85	83	81																												
4	97	90	84	80	96	89	84	80	87	82	79	85	81	78	83	80	77	76																												
5	93	84	78	74	91	83	78	74	82	77	73	80	76	73	78	75	72	70																												
6	88	79	73	69	86	78	73	69	77	72	68	75	71	68	74	70	67	66																												
7	84	74	68	64	82	74	68	64	72	67	64	71	67	63	70	66	63	62																												
8	79	70	64	60	78	69	64	60	68	63	60	67	63	59	66	62	59	58																												
9	76	66	60	56	75	66	60	56	65	60	56	64	59	56	63	59	56	54																												
10	72	63	57	53	71	62	57	53	61	56	53	61	56	53	60	55	52	51																												

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P203838

CATALOG NUMBER: LD6B10D010 EU6B10209727 6LBNGPH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	42.0	11.0
10°-20°	103.6	27.1
20°-30°	125.5	32.9
30°-40°	85.5	22.4
40°-50°	20.4	5.3
50°-60°	3.2	0.8
60°-70°	1.2	0.3
70°-80°	0.4	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	271.1	71.0
0°-40°	356.7	93.4
0°-60°	380.2	99.6
0°-90°	381.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	381.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	464	
5°	451	42
15°	371	104
25°	274	126
35°	137	86
45°	22	20
55°	4	3
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P203838

CATALOG NUMBER: LD6B10D010 EU6B10209727 6LBNGPH1

CANDELA DISTRIBUTION (FULL):

0°	
0°	464.1
2.5°	461.4
5°	451.0
7.5°	437.1
10°	417.0
12.5°	394.4
15°	370.9
17.5°	346.5
20°	322.1
22.5°	297.8
25°	274.3
27.5°	252.5
30°	221.1
32.5°	180.2
35°	136.7
37.5°	97.5
40°	64.4
42.5°	40.0
45°	21.8
47.5°	11.3
50°	6.1
52.5°	4.4
55°	3.5
57.5°	2.6
60°	1.7
62.5°	1.7
65°	0.9
67.5°	0.9
70°	0.9
72.5°	0.9
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)