

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P203117

Luminaire Tested: **LD6B10D010 EU6B10209727 6LBWMW1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P203117
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD6B10D010 EU6B10209727 6LBWMW1
Description: PORTFOLIO 6 INCH 60 DEGREE CUTOFF RECESSED DOWNLIGHT
WIDE DISTRIBUTION WITH MATTE WHITE TRIM
WATTAGE D010TR-10.05 W DE010-10.58 W D5LT-10.2 W DMX-10.6 W DL2-11.8 W
DL3-11.1 W DLE-11.39 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 717.5 lumens
Efficiency: N/A
Efficacy: 72.5 lumens/watt
Spacing Criteria (0/90/45): 1.13 / 1.13 / 1.15
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 9.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P203117

CATALOG NUMBER: LD6B10D010 EU6B10209727 6LBWMW1

Luminous Intensity Polar Plot

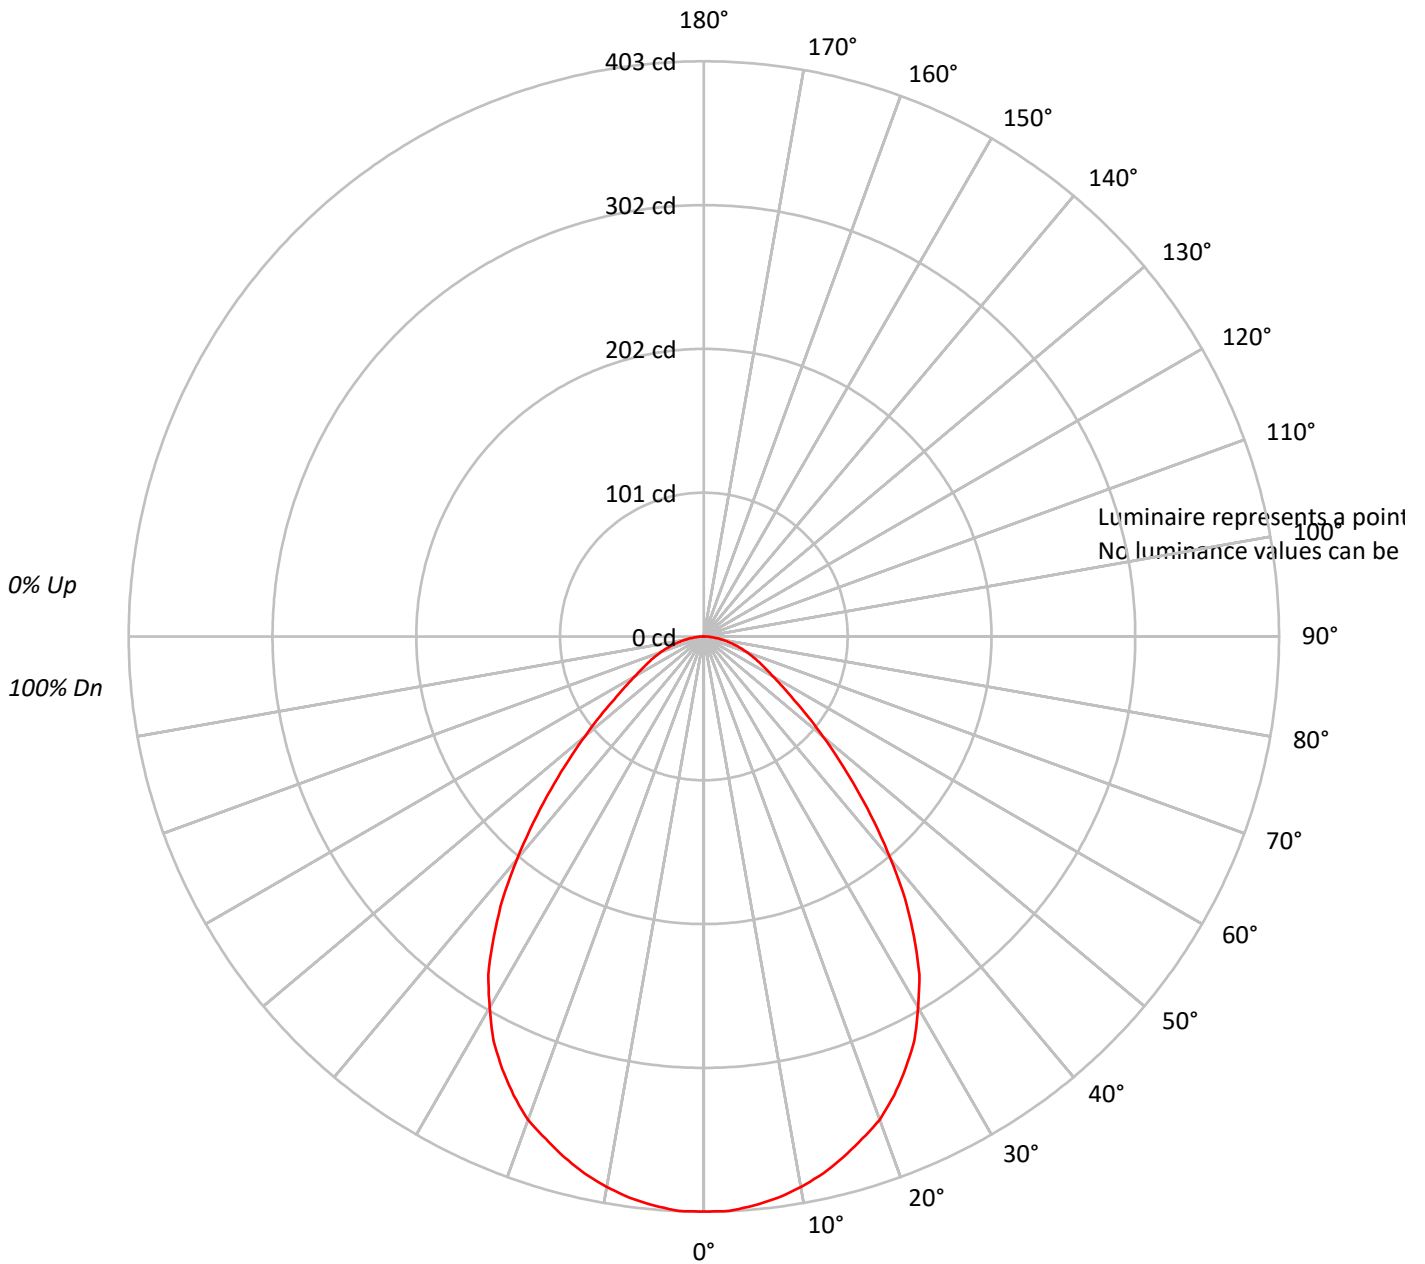



TEST NUMBER: P203117

CATALOG NUMBER: LD6B10D010 EU6B10209727 6LBWMW1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	111	107	104	100	108	105	102	99	101	98	96	97	95	93	93	92	90	88	88	88	88
2	103	96	90	86	100	94	89	85	91	86	83	88	84	81	85	82	79	77	77	77	77
3	95	86	80	74	93	85	79	74	82	77	72	80	75	71	77	73	70	68	68	68	68
4	89	78	71	65	86	77	70	65	75	69	64	72	67	63	70	66	62	60	60	60	60
5	82	71	64	58	80	70	63	58	68	62	57	66	61	56	65	60	56	54	54	54	54
6	77	65	57	52	75	64	57	52	63	56	51	61	55	51	60	54	50	49	49	49	49
7	72	60	52	47	70	59	52	47	58	51	46	56	50	46	55	50	46	44	44	44	44
8	67	55	48	42	66	55	47	42	53	47	42	52	46	42	51	46	42	40	40	40	40
9	63	51	44	39	62	51	44	39	50	43	39	49	43	38	48	42	38	37	37	37	37
10	60	48	40	36	58	47	40	36	46	40	36	45	40	35	45	39	35	34	34	34	34

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P203117

CATALOG NUMBER: LD6B10D010 EU6B10209727 6LBWMW1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	37.9	5.3
10°-20°	106.4	14.8
20°-30°	153.3	21.4
30°-40°	159.2	22.2
40°-50°	117.7	16.4
50°-60°	70.3	9.8
60°-70°	42.7	6.0
70°-80°	23.4	3.3
80°-90°	6.5	0.9
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	297.7	41.5
0°-40°	456.9	63.7
0°-60°	644.9	89.9
0°-90°	717.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	717.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	403	
5°	400	38
15°	378	106
25°	334	153
35°	257	159
45°	151	118
55°	77	70
65°	43	43
75°	22	23
85°	5	7
90°	0	



TEST NUMBER: P203117

CATALOG NUMBER: LD6B10D010 EU6B10209727 6LBWMW1

CANDELA DISTRIBUTION (FULL):

	0°
0°	402.9
2.5°	402.9
5°	400.3
7.5°	396.8
10°	391.6
12.5°	385.5
15°	377.7
17.5°	369.0
20°	360.3
22.5°	348.1
25°	334.2
27.5°	319.4
30°	300.2
32.5°	281.1
35°	256.7
37.5°	231.5
40°	203.6
42.5°	176.6
45°	151.4
47.5°	128.8
50°	108.8
52.5°	91.4
55°	76.6
57.5°	65.3
60°	55.7
62.5°	48.7
65°	42.6
67.5°	37.4
70°	32.2
72.5°	27.0
75°	21.8
77.5°	17.4
80°	13.1
82.5°	9.6
85°	5.2
87.5°	2.6
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)