

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P202907

Luminaire Tested: **LD6B10D010 EU6B10209030 6LBWGPH1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P202907  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LD6B10D010 EU6B10209030 6LBWGPH1  
Description: PORTFOLIO 6 INCH 60 DEGREE CUTOFF RECESSED DOWNLIGHT  
WIDE DISTRIBUTIONWITH GRAPHITE HAZE TRIM  
WATTAGE D010TR-10.05 W DE010-10.58 W D5LT-10.2 W DMX-10.6 W DL2-11.8 W  
DL3-11.1 W DLE-11.39 W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 604.3 lumens  
Efficiency: N/A  
Efficacy: 61.0 lumens/watt  
Spacing Criteria (0/90/45): 1.11 / 1.11 / 1.11  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 9.9  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P202907

CATALOG NUMBER: LD6B10D010 EU6B10209030 6LBWGPH1

### Luminous Intensity Polar Plot

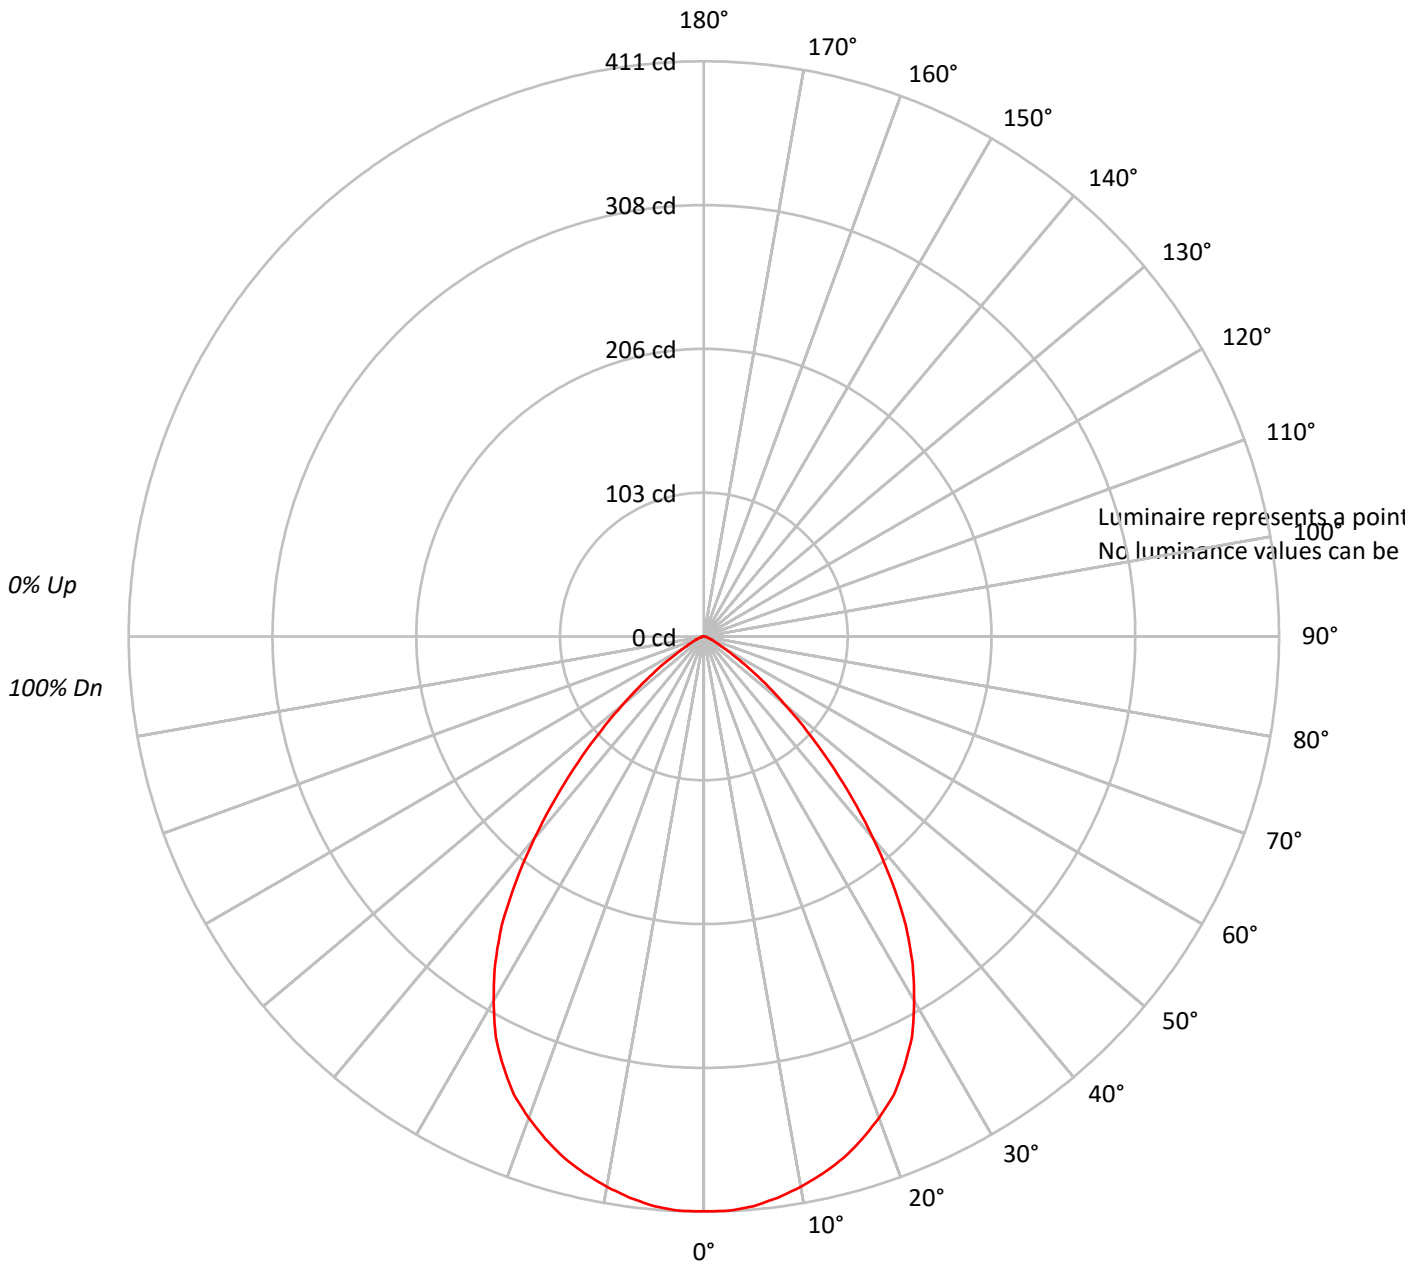



TEST NUMBER: P202907

CATALOG NUMBER: LD6B10D010 EU6B10209030 6LBWGPH1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	112	109	106	104	110	107	104	102	103	101	99	99	98	96	96	94	93	91			
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	86	84	82			
3	99	91	85	81	97	90	84	80	87	82	79	85	81	77	82	79	76	74			
4	93	84	77	72	91	82	76	72	80	75	71	78	74	70	76	72	69	67			
5	87	77	70	65	85	76	69	65	74	68	64	72	67	63	71	66	63	61			
6	81	71	64	59	80	70	63	59	68	62	58	67	62	58	65	61	57	56			
7	76	65	58	53	75	65	58	53	63	57	53	62	57	53	61	56	52	51			
8	72	61	54	49	70	60	53	49	59	53	49	58	52	48	57	52	48	47			
9	68	57	50	45	66	56	49	45	55	49	45	54	48	45	53	48	44	43			
10	64	53	46	42	63	52	46	42	51	45	41	51	45	41	50	45	41	40			

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P202907

CATALOG NUMBER: LD6B10D010 EU6B10209030 6LBWGPH1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	38.7	6.4
10°-20°	108.5	18.0
20°-30°	155.2	25.7
30°-40°	154.7	25.6
40°-50°	98.6	16.3
50°-60°	36.4	6.0
60°-70°	9.1	1.5
70°-80°	2.7	0.5
80°-90°	0.4	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	302.4	50.0
0°-40°	457.1	75.7
0°-60°	592.1	98.0
0°-90°	604.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	604.3	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	411	
5°	409	39
15°	386	109
25°	339	155
35°	252	155
45°	127	99
55°	38	36
65°	8	9
75°	2	3
85°	0	0
90°	0	



TEST NUMBER: P202907

CATALOG NUMBER: LD6B10D010 EU6B10209030 6LBWGPH1

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	410.7
2.5°	410.7
5°	408.6
7.5°	404.5
10°	399.3
12.5°	393.0
15°	385.8
17.5°	376.4
20°	366.0
22.5°	354.6
25°	339.0
27.5°	322.3
30°	300.5
32.5°	277.6
35°	251.6
37.5°	220.4
40°	188.2
42.5°	157.0
45°	126.9
47.5°	99.8
50°	74.9
52.5°	55.1
55°	38.5
57.5°	25.0
60°	16.6
62.5°	11.4
65°	8.3
67.5°	6.2
70°	5.2
72.5°	3.1
75°	2.1
77.5°	2.1
80°	1.0
82.5°	1.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)