

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P204346

Luminaire Tested: **LD6B10D010 EU6B10208040 6LBSGPH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P204346
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD6B10D010 EU6B10208040 6LBSGPH1
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT
SHALLOW DISTRIBUTION WITH GRAPHITE HAZE TRIM
WATTAGE D010TR-10.05 W DE010-10.58 W D5LT-10.2 W DMX-10.6 W DL2-11.8 W
DL3-11.1 W DLE-11.39 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1052.1 lumens
Efficiency: N/A
Efficacy: 106.3 lumens/watt
Spacing Criteria (0/90/45): 1.16 / 1.16 / 1.26
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 9.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P204346

CATALOG NUMBER: LD6B10D010 EU6B10208040 6LBSGPH1

Luminous Intensity Polar Plot

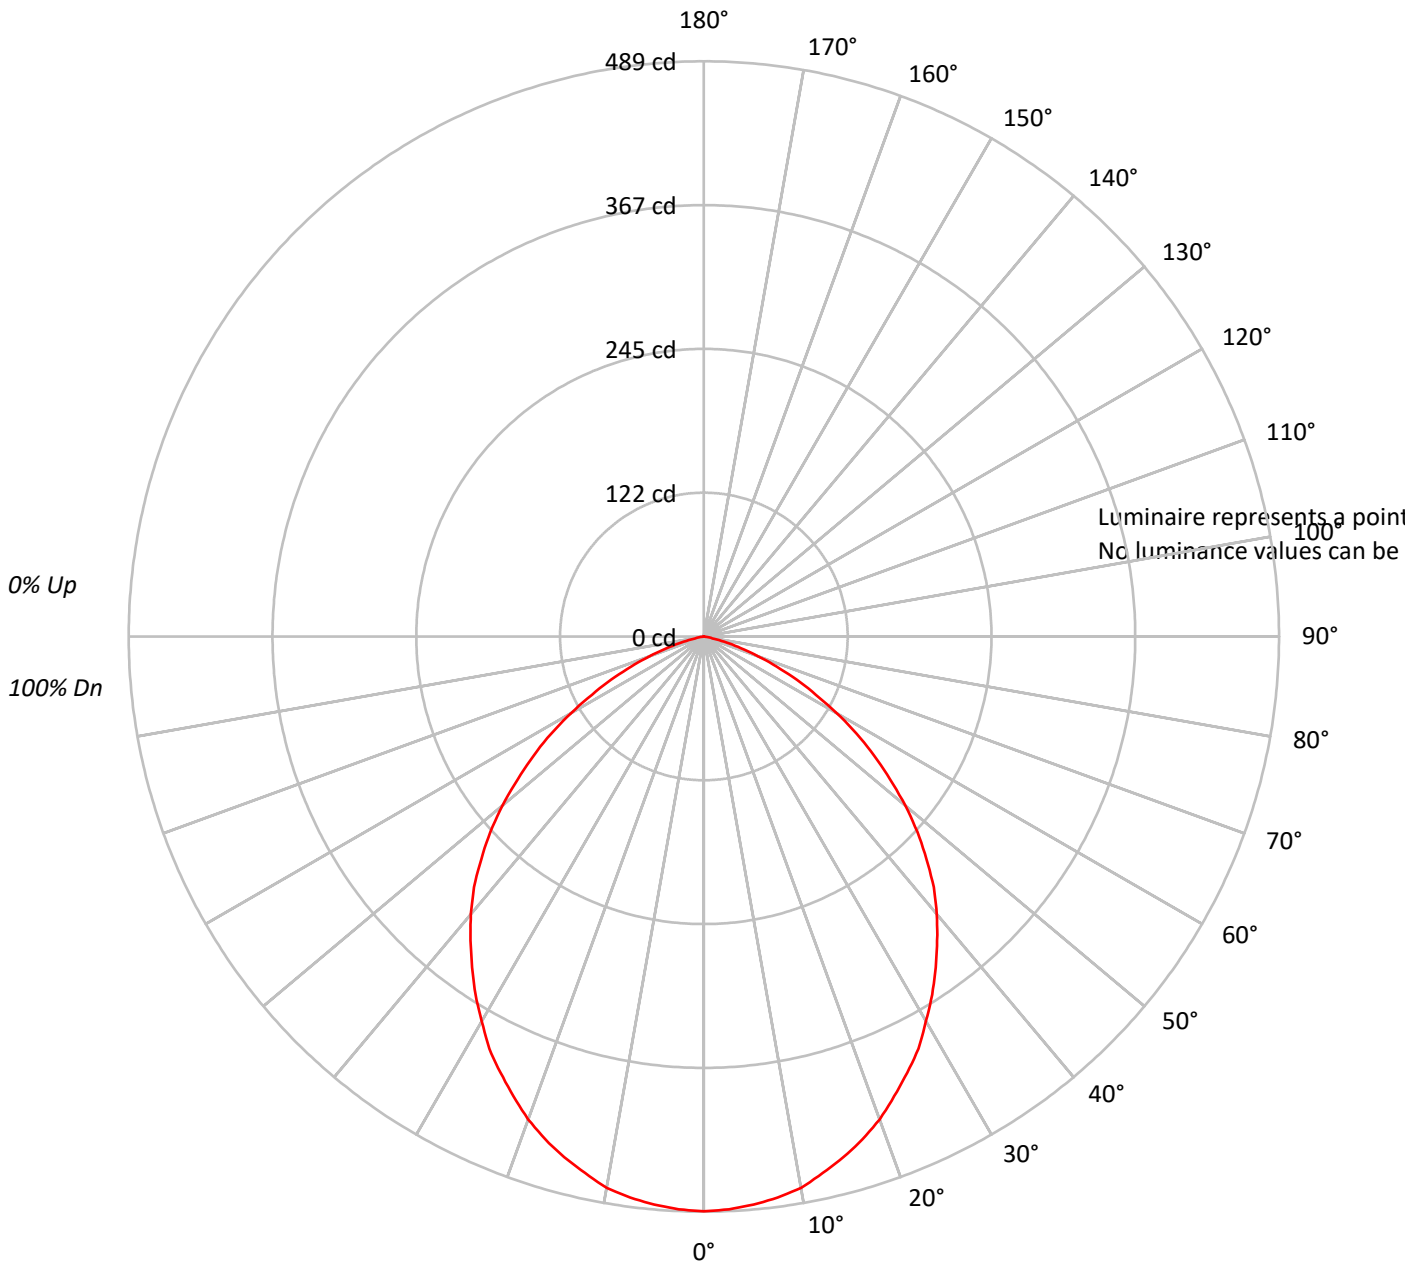



TEST NUMBER: P204346

CATALOG NUMBER: LD6B10D010 EU6B10208040 6LBSGPH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	111	107	103	100	108	105	102	99	101	98	96	97	95	93	93	92	90	88				88
2	102	95	89	84	100	93	88	83	90	85	82	87	83	80	84	81	78	76				76
3	94	85	78	72	92	83	77	71	80	75	70	78	73	69	75	71	68	66				66
4	87	76	68	62	85	75	67	62	72	66	61	70	65	60	68	63	59	57				57
5	80	68	60	54	78	67	60	54	65	59	53	63	58	53	62	56	52	50				50
6	74	62	54	48	73	61	53	48	59	52	47	58	52	47	56	51	47	45				45
7	69	57	48	43	68	56	48	43	54	47	42	53	47	42	52	46	42	40				40
8	65	52	44	38	63	51	44	38	50	43	38	49	42	38	48	42	38	36				36
9	60	48	40	35	59	47	40	35	46	39	35	45	39	34	44	38	34	32				32
10	57	44	37	32	56	44	36	32	43	36	32	42	36	31	41	35	31	30				30

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P204346

CATALOG NUMBER: LD6B10D010 EU6B10208040 6LBSGPH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	46.0	4.4
10°-20°	129.2	12.3
20°-30°	188.4	17.9
30°-40°	214.8	20.4
40°-50°	206.1	19.6
50°-60°	157.8	15.0
60°-70°	86.6	8.2
70°-80°	23.0	2.2
80°-90°	0.3	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	363.5	34.6
0°-40°	578.4	55.0
0°-60°	942.2	89.6
0°-90°	1052.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1052.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	489	
5°	485	46
15°	458	129
25°	409	188
35°	344	215
45°	268	206
55°	177	158
65°	87	87
75°	20	23
85°	0	0
90°	0	



TEST NUMBER: P204346

CATALOG NUMBER: LD6B10D010 EU6B10208040 6LBSGPH1

CANDELA DISTRIBUTION (FULL):

0°	
0°	488.7
2.5°	487.4
5°	484.9
7.5°	481.1
10°	476.1
12.5°	467.2
15°	458.4
17.5°	448.3
20°	436.9
22.5°	423.0
25°	409.1
27.5°	395.2
30°	377.6
32.5°	361.2
35°	343.5
37.5°	325.8
40°	308.1
42.5°	289.2
45°	267.7
47.5°	246.2
50°	223.5
52.5°	199.5
55°	176.8
57.5°	154.1
60°	130.1
62.5°	107.3
65°	87.1
67.5°	66.9
70°	49.2
72.5°	32.8
75°	20.2
77.5°	8.8
80°	2.5
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)