

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P204252

Luminaire Tested: **LD6B15D010 EU6B10208027 6LBSWH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P204252
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD6B15D010 EU6B10208027 6LBSWH1
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT
SHALLOW DISTRIBUTION WITH WHEAT TRIM
WATTAGE D010TR-14.39 W DE010-14.29 W D5LT-14.34 W DMX-14.46 W DL2-15.8 W
DL3-15.28 W DLE-15.432 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1469.0 lumens
Efficiency: N/A
Efficacy: 102.7 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 1.08
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 14.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P204252

CATALOG NUMBER: LD6B15D010 EU6B10208027 6LBSWH1

Luminous Intensity Polar Plot

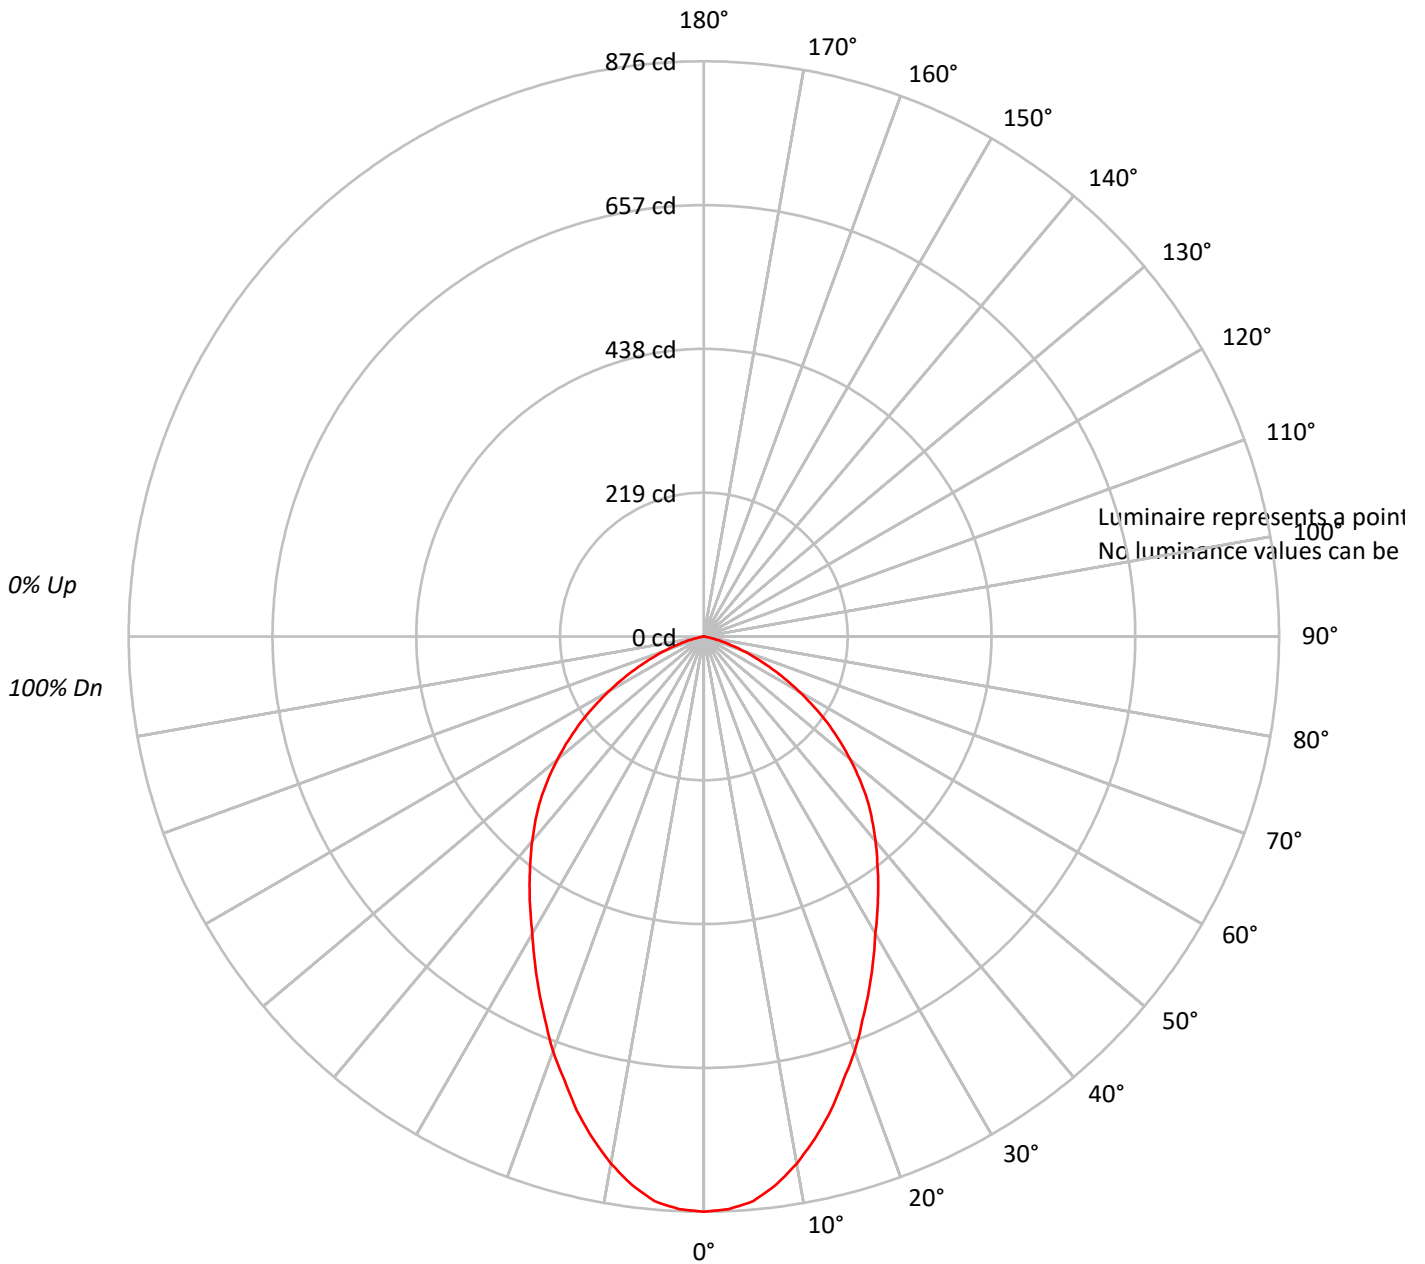



TEST NUMBER: P204252

CATALOG NUMBER: LD6B15D010 EU6B10208027 6LBSWH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	111	107	104	101	108	105	102	99	101	98	96	97	95	93	94	92	90	89				89
2	103	96	90	85	100	94	89	84	91	86	83	87	84	81	85	82	79	77				77
3	95	86	79	73	93	84	78	73	82	76	72	79	74	70	76	73	69	67				67
4	88	77	70	64	86	76	69	63	74	68	63	72	66	62	69	65	61	59				59
5	81	70	62	56	79	69	62	56	67	60	55	65	59	55	63	58	54	52				52
6	76	64	56	50	74	63	55	50	61	54	49	60	54	49	58	53	49	47				47
7	71	58	51	45	69	58	50	45	56	49	45	55	49	44	54	48	44	42				42
8	66	54	46	41	65	53	46	41	52	45	40	51	45	40	50	44	40	38				38
9	62	50	42	37	61	49	42	37	48	41	37	47	41	37	46	41	37	35				35
10	58	46	39	34	57	46	39	34	45	38	34	44	38	34	43	38	34	32				32

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P204252

CATALOG NUMBER: LD6B15D010 EU6B10208027 6LBSWH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	80.8	5.5
10°-20°	209.2	14.2
20°-30°	273.6	18.6
30°-40°	289.7	19.7
40°-50°	270.2	18.4
50°-60°	204.6	13.9
60°-70°	110.8	7.5
70°-80°	29.7	2.0
80°-90°	0.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	563.5	38.4
0°-40°	853.2	58.1
0°-60°	1328.0	90.4
0°-90°	1469.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1469.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	876	
5°	863	81
15°	748	209
25°	595	274
35°	463	290
45°	352	270
55°	230	205
65°	111	111
75°	26	30
85°	0	0
90°	0	



TEST NUMBER: P204252

CATALOG NUMBER: LD6B15D010 EU6B10208027 6LBSWH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	876.1
2.5°	872.9
5°	863.3
7.5°	842.4
10°	815.0
12.5°	782.9
15°	747.5
17.5°	707.3
20°	672.0
22.5°	631.8
25°	594.8
27.5°	557.8
30°	522.5
32.5°	491.9
35°	463.0
37.5°	434.0
40°	406.7
42.5°	379.4
45°	352.1
47.5°	321.5
50°	291.0
52.5°	260.4
55°	229.9
57.5°	197.7
60°	167.2
62.5°	138.2
65°	110.9
67.5°	85.2
70°	62.7
72.5°	43.4
75°	25.7
77.5°	11.3
80°	3.2
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)