

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P204780

Luminaire Tested: **LD6B15D010 EU6B10209727 6LBCSMW1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P204780
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD6B15D010 EU6B10209727 6LBCSMW1
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT
SHALLOW DISTRIBUTION WITH CAST MATTE WHITE TRIM
WATTAGE D010TR-14.39 W DE010-14.29 W D5LT-14.34 W DMX-14.46 W DL2-15.8 W
DL3-15.28 W DLE-15.432 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1150.0 lumens
Efficiency: N/A
Efficacy: 80.4 lumens/watt
Spacing Criteria (0/90/45): 1.23 / 1.23 / 1.33
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 14.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P204780

CATALOG NUMBER: LD6B15D010 EU6B10209727 6LBCSMW1

Luminous Intensity Polar Plot

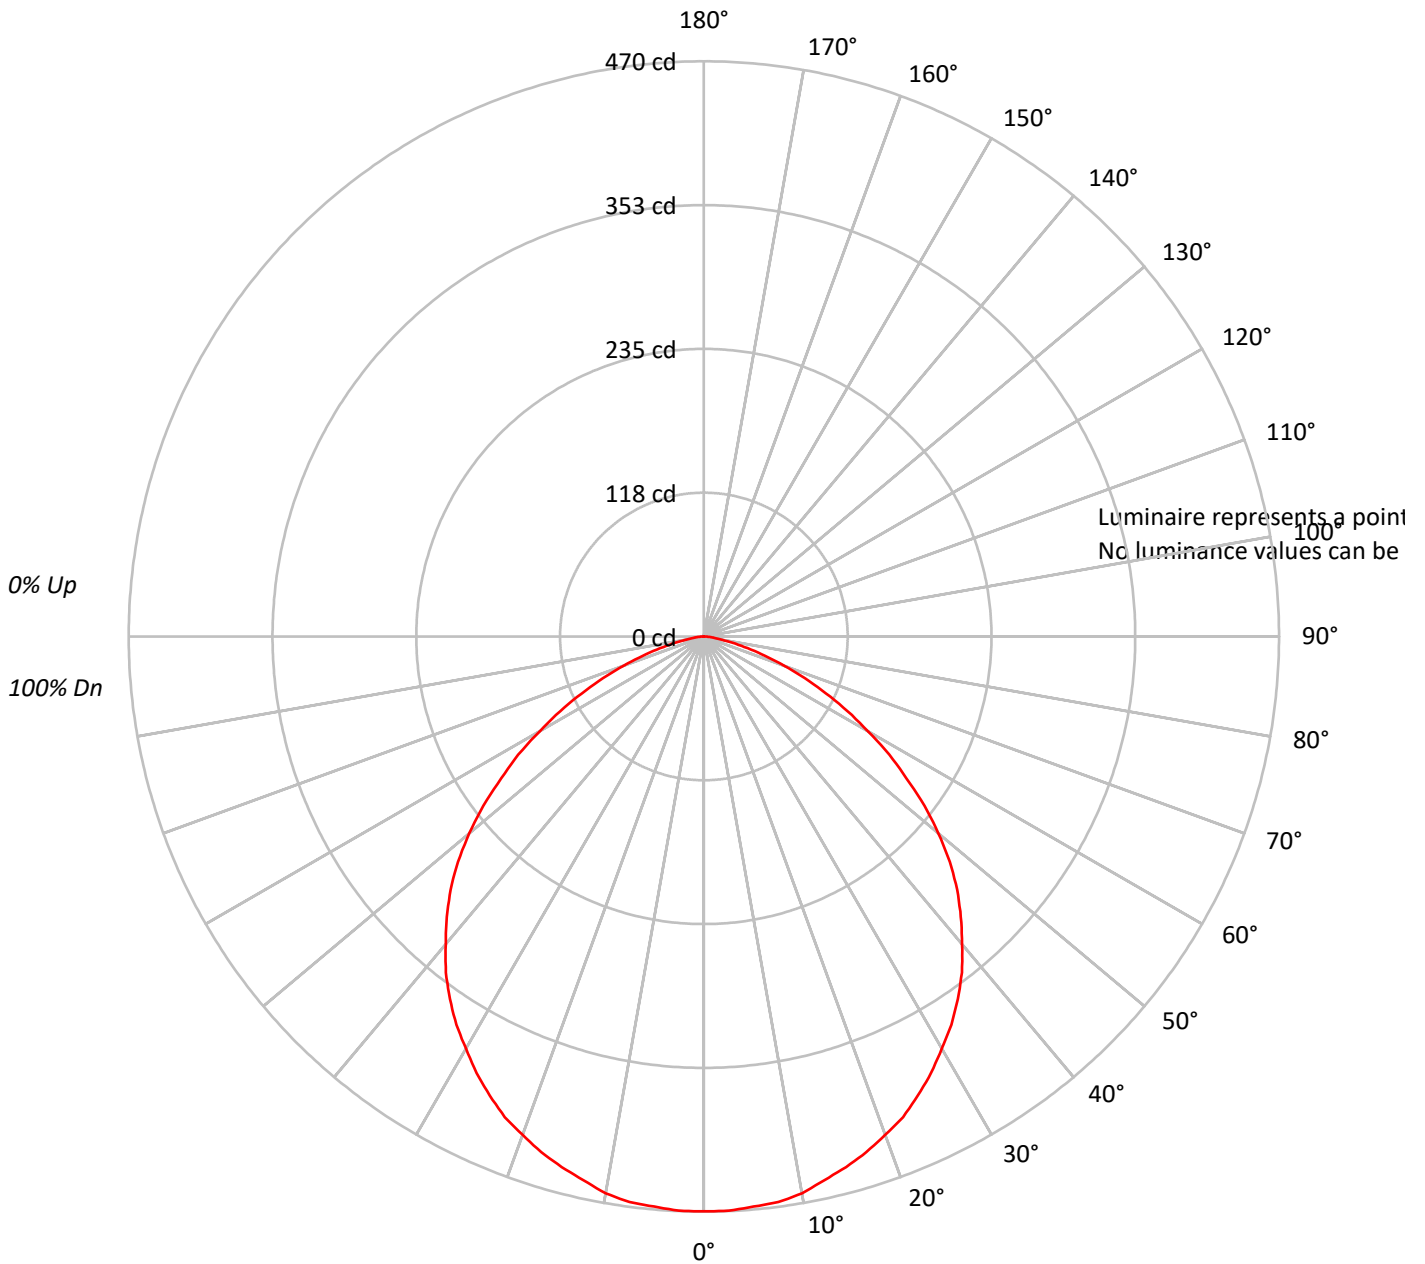



TEST NUMBER: P204780

CATALOG NUMBER: LD6B15D010 EU6B10209727 6LBCSMW1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	110	106	102	99	108	104	100	97	100	97	94	96	93	91	92	90	89	87				87
2	101	94	87	82	99	92	86	81	88	84	79	85	81	78	82	79	76	74				74
3	93	83	75	70	90	81	74	69	79	73	68	76	71	67	73	69	65	63				63
4	85	74	66	60	83	73	65	59	70	64	58	68	62	58	66	61	57	55				55
5	79	66	58	52	77	65	57	51	63	56	51	61	55	50	60	54	50	48				48
6	73	60	52	45	71	59	51	45	57	50	45	56	49	44	54	49	44	42				42
7	68	55	46	40	66	54	46	40	52	45	40	51	44	40	50	44	39	37				37
8	63	50	42	36	61	49	41	36	48	41	36	47	40	36	46	40	35	33				33
9	59	46	38	33	57	45	38	32	44	37	32	43	37	32	42	36	32	30				30
10	55	42	35	30	54	42	34	30	41	34	29	40	34	29	39	33	29	27				27

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P204780

CATALOG NUMBER: LD6B15D010 EU6B10209727 6LBCSMW1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	44.5	3.9
10°-20°	126.7	11.0
20°-30°	190.6	16.6
30°-40°	225.9	19.6
40°-50°	224.8	19.5
50°-60°	181.2	15.8
60°-70°	109.6	9.5
70°-80°	40.7	3.5
80°-90°	6.1	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	361.8	31.5
0°-40°	587.6	51.1
0°-60°	993.6	86.4
0°-90°	1150.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1150.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	470	
5°	468	44
15°	449	127
25°	414	191
35°	362	226
45°	293	225
55°	202	181
65°	110	110
75°	37	41
85°	5	6
90°	0	



TEST NUMBER: P204780

CATALOG NUMBER: LD6B15D010 EU6B10209727 6LBCSMW1

CANDELA DISTRIBUTION (FULL):

	0°
0°	469.7
2.5°	469.7
5°	467.6
7.5°	466.2
10°	462.0
12.5°	455.0
15°	448.8
17.5°	441.8
20°	433.4
22.5°	425.1
25°	413.9
27.5°	402.1
30°	388.8
32.5°	376.3
35°	361.7
37.5°	346.3
40°	328.2
42.5°	310.8
45°	292.7
47.5°	272.5
50°	250.2
52.5°	227.2
55°	202.1
57.5°	179.8
60°	154.7
62.5°	132.4
65°	110.1
67.5°	89.2
70°	69.7
72.5°	52.3
75°	36.9
77.5°	23.7
80°	13.9
82.5°	8.4
85°	4.9
87.5°	2.1
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)