

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P203538

Luminaire Tested: **LD6B15D010 EU6B10209030 6LBMMW1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P203538  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LD6B15D010 EU6B10209030 6LBMMW1  
Description: PORTFOLIO 6 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT  
MEDIUM DISTRIBUTION WITH MATTE WHITE TRIM  
WATTAGE D010TR-14.39 W DE010-14.29 W D5LT-14.34 W DMX-14.46 W DL2-15.8 W  
DL3-15.28 W DLE-15.432 W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1004.5 lumens  
Efficiency: N/A  
Efficacy: 70.2 lumens/watt  
Spacing Criteria (0/90/45): 1 / 1 / 0.97  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 14.3  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P203538

CATALOG NUMBER: LD6B15D010 EU6B10209030 6LBMMW1

### Luminous Intensity Polar Plot

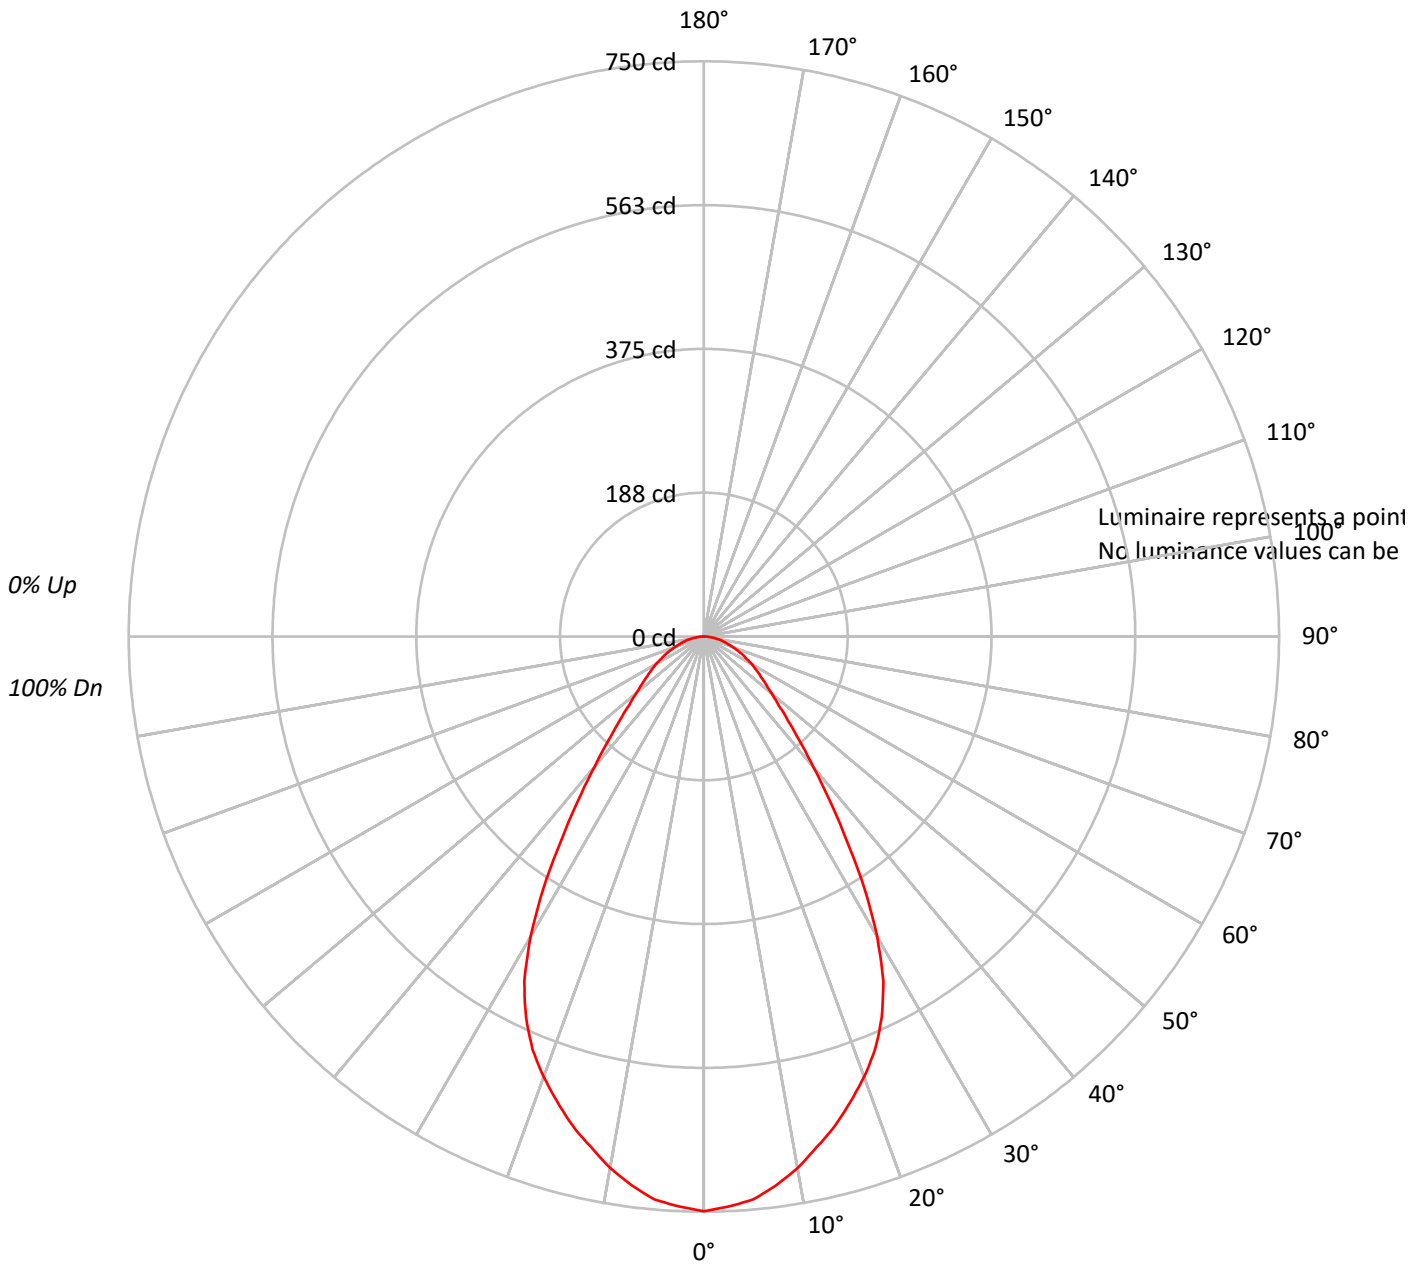



TEST NUMBER: P203538

CATALOG NUMBER: LD6B15D010 EU6B10209030 6LBMMW1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	111	108	104	101	109	105	103	100	101	99	97	98	96	94	94	92	91	89			89
2	104	97	92	88	101	96	91	87	92	88	85	89	86	83	86	83	81	79			79
3	97	88	82	77	95	87	81	76	84	79	75	82	77	74	79	76	73	71			71
4	90	81	74	68	88	80	73	68	77	72	67	75	70	66	73	69	65	64			64
5	85	74	67	61	83	73	66	61	71	65	61	69	64	60	68	63	59	58			58
6	79	68	61	56	78	68	61	56	66	60	55	64	59	55	63	58	54	53			53
7	75	63	56	51	73	63	56	51	61	55	50	60	54	50	59	54	50	48			48
8	70	59	52	47	69	58	51	47	57	51	46	56	50	46	55	50	46	44			44
9	66	55	48	43	65	54	48	43	53	47	43	52	47	43	51	46	43	41			41
10	63	51	45	40	62	51	44	40	50	44	40	49	44	40	48	43	40	38			38

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P203538

CATALOG NUMBER: LD6B15D010 EU6B10209030 6LBMMW1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	69.2	6.9
10°-20°	185.5	18.5
20°-30°	249.0	24.8
30°-40°	204.3	20.3
40°-50°	122.7	12.2
50°-60°	81.5	8.1
60°-70°	54.6	5.4
70°-80°	29.4	2.9
80°-90°	8.3	0.8
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	503.7	50.1
0°-40°	708.0	70.5
0°-60°	912.2	90.8
0°-90°	1004.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1004.5	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	750	
5°	737	69
15°	661	185
25°	549	249
35°	324	204
45°	155	123
55°	90	82
65°	55	55
75°	28	29
85°	7	8
90°	0	



TEST NUMBER: P203538

CATALOG NUMBER: LD6B15D010 EU6B10209030 6LBMMW1

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	749.5
2.5°	744.0
5°	737.0
7.5°	721.8
10°	703.8
12.5°	681.6
15°	660.8
17.5°	635.9
20°	611.0
22.5°	583.3
25°	548.6
27.5°	507.1
30°	451.6
32.5°	389.3
35°	324.2
37.5°	268.8
40°	221.7
42.5°	184.3
45°	155.2
47.5°	131.6
50°	115.0
52.5°	101.1
55°	90.1
57.5°	80.4
60°	72.0
62.5°	62.3
65°	55.4
67.5°	47.1
70°	40.2
72.5°	33.2
75°	27.7
77.5°	22.2
80°	16.6
82.5°	12.5
85°	6.9
87.5°	2.8
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)