

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P202714

Luminaire Tested: **LD6B15D010 EU6B10209030 6LBWH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P202714
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD6B15D010 EU6B10209030 6LBWH1
Description: PORTFOLIO 6 INCH 60 DEGREE CUTOFF RECESSED DOWNLIGHT
WIDE DISTRIBUTION WITH SEMI-SPECULAR CLEAR TRIM
WATTAGE D010TR-14.39 W DE010-14.29 W D5LT-14.34 W DMX-14.46 W DL2-15.8 W
DL3-15.28 W DLE-15.432 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1107.8 lumens
Efficiency: N/A
Efficacy: 77.5 lumens/watt
Spacing Criteria (0/90/45): 1.16 / 1.16 / 1.16
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 14.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P202714

CATALOG NUMBER: LD6B15D010 EU6B10209030 6LBWH1

Luminous Intensity Polar Plot

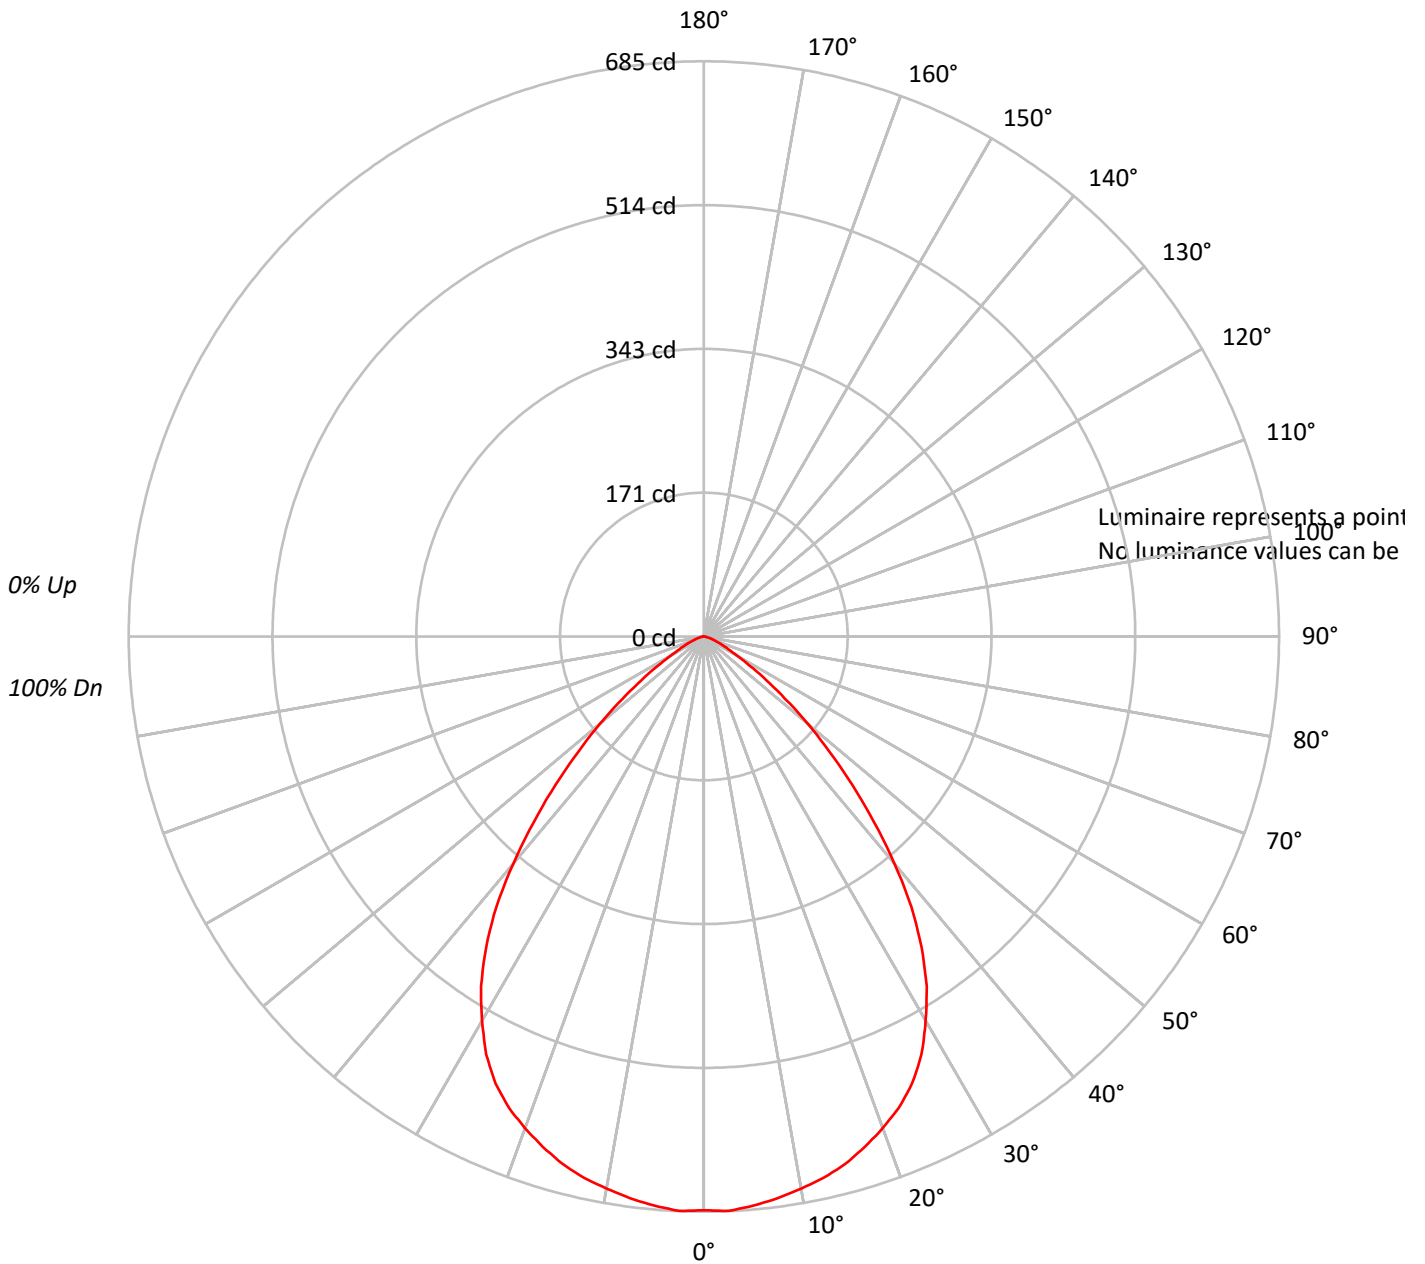



TEST NUMBER: P202714

CATALOG NUMBER: LD6B15D010 EU6B10209030 6LBWH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|----|----|----|----|----|----|---|----|--|--|--|--|--|--|--|--|----|--|--|--|--|--|--|--|--|---|
| RF | 20 | | | | | | | | | 20 | | | | | | | | | 20 | | | | | | | | | 20 | | | | | | | | | 20 | | | | | | | | | |
| RC | 80 | | | | | | | | | 70 | | | | | | | | | 50 | | | | | | | | | 30 | | | | | | | | | 10 | | | | | | | | | 0 |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 | | | | | | | | | | | | | | | | | | | |
| RCR | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 112 | 109 | 106 | 103 | 110 | 107 | 104 | 101 | 103 | 100 | 98 | 99 | 97 | 95 | 95 | 94 | 93 | 91 | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 105 | 99 | 94 | 90 | 103 | 97 | 93 | 89 | 94 | 90 | 87 | 91 | 88 | 85 | 88 | 85 | 83 | 81 | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 98 | 90 | 84 | 79 | 96 | 89 | 83 | 78 | 86 | 81 | 77 | 83 | 79 | 76 | 81 | 78 | 75 | 73 | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 92 | 82 | 75 | 70 | 90 | 81 | 75 | 70 | 79 | 73 | 69 | 77 | 72 | 68 | 75 | 71 | 67 | 65 | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | 86 | 75 | 68 | 63 | 84 | 74 | 68 | 63 | 72 | 66 | 62 | 71 | 65 | 61 | 69 | 64 | 61 | 59 | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6 | 80 | 69 | 62 | 57 | 78 | 68 | 61 | 56 | 67 | 61 | 56 | 65 | 60 | 56 | 64 | 59 | 55 | 53 | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7 | 75 | 64 | 56 | 51 | 73 | 63 | 56 | 51 | 62 | 55 | 51 | 60 | 55 | 51 | 59 | 54 | 50 | 49 | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 8 | 70 | 59 | 52 | 47 | 69 | 58 | 51 | 47 | 57 | 51 | 46 | 56 | 50 | 46 | 55 | 50 | 46 | 44 | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 9 | 66 | 55 | 48 | 43 | 65 | 54 | 47 | 43 | 53 | 47 | 43 | 52 | 47 | 42 | 51 | 46 | 42 | 41 | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10 | 62 | 51 | 44 | 40 | 61 | 50 | 44 | 39 | 50 | 43 | 39 | 49 | 43 | 39 | 48 | 43 | 39 | 38 | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P202714

CATALOG NUMBER: LD6B15D010 EU6B10209030 6LBWH1

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 64.5 | 5.8 |
| 10°-20° | 183.1 | 16.5 |
| 20°-30° | 268.5 | 24.2 |
| 30°-40° | 279.4 | 25.2 |
| 40°-50° | 193.3 | 17.5 |
| 50°-60° | 84.2 | 7.6 |
| 60°-70° | 25.8 | 2.3 |
| 70°-80° | 7.7 | 0.7 |
| 80°-90° | 1.2 | 0.1 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-30° | 516.2 | 46.6 |
| 0°-40° | 795.6 | 71.8 |
| 0°-60° | 1073.1 | 96.9 |
| 0°-90° | 1107.8 | 100.0 |
| 90°-120° | 0.0 | 0.0 |
| 90°-150° | 0.0 | 0.0 |
| 90°-180° | 0.0 | 0.0 |
| 0°-180° | 1107.8 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | Flux |
|-----|-----|------|
| 0° | 683 | |
| 5° | 680 | 65 |
| 15° | 650 | 183 |
| 25° | 587 | 268 |
| 35° | 452 | 279 |
| 45° | 250 | 193 |
| 55° | 90 | 84 |
| 65° | 24 | 26 |
| 75° | 7 | 8 |
| 85° | 1 | 1 |
| 90° | 0 | |



TEST NUMBER: P202714

CATALOG NUMBER: LD6B15D010 EU6B10209030 6LBWH1

CANDELA DISTRIBUTION (FULL):

| | 0° |
|-------|-------|
| 0° | 683.3 |
| 2.5° | 684.7 |
| 5° | 680.4 |
| 7.5° | 674.7 |
| 10° | 667.5 |
| 12.5° | 660.3 |
| 15° | 650.3 |
| 17.5° | 637.4 |
| 20° | 623.0 |
| 22.5° | 607.2 |
| 25° | 587.1 |
| 27.5° | 561.3 |
| 30° | 528.3 |
| 32.5° | 493.8 |
| 35° | 452.2 |
| 37.5° | 406.2 |
| 40° | 353.1 |
| 42.5° | 300.0 |
| 45° | 249.8 |
| 47.5° | 202.4 |
| 50° | 160.8 |
| 52.5° | 122.0 |
| 55° | 90.4 |
| 57.5° | 64.6 |
| 60° | 44.5 |
| 62.5° | 33.0 |
| 65° | 24.4 |
| 67.5° | 18.7 |
| 70° | 12.9 |
| 72.5° | 10.0 |
| 75° | 7.2 |
| 77.5° | 4.3 |
| 80° | 2.9 |
| 82.5° | 1.4 |
| 85° | 1.4 |
| 87.5° | 0.0 |
| 90° | 0.0 |



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)