

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P203224

Luminaire Tested: **LD6B15D010 EU6B10208035 6LBMH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P203224
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD6B15D010 EU6B10208035 6LBMH1
Description: PORTFOLIO 6 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT
MEDIUM DISTRIBUTION WITH SEMI-SPECULAR CLEAR TRIM
WATTAGE D010TR-14.39 W DE010-14.29 W D5LT-14.34 W DMX-14.46 W DL2-15.8 W
DL3-15.28 W DLE-15.432 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1098.5 lumens
Efficiency: N/A
Efficacy: 76.8 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.93
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 14.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P203224

CATALOG NUMBER: LD6B15D010 EU6B10208035 6LBMH1

Luminous Intensity Polar Plot

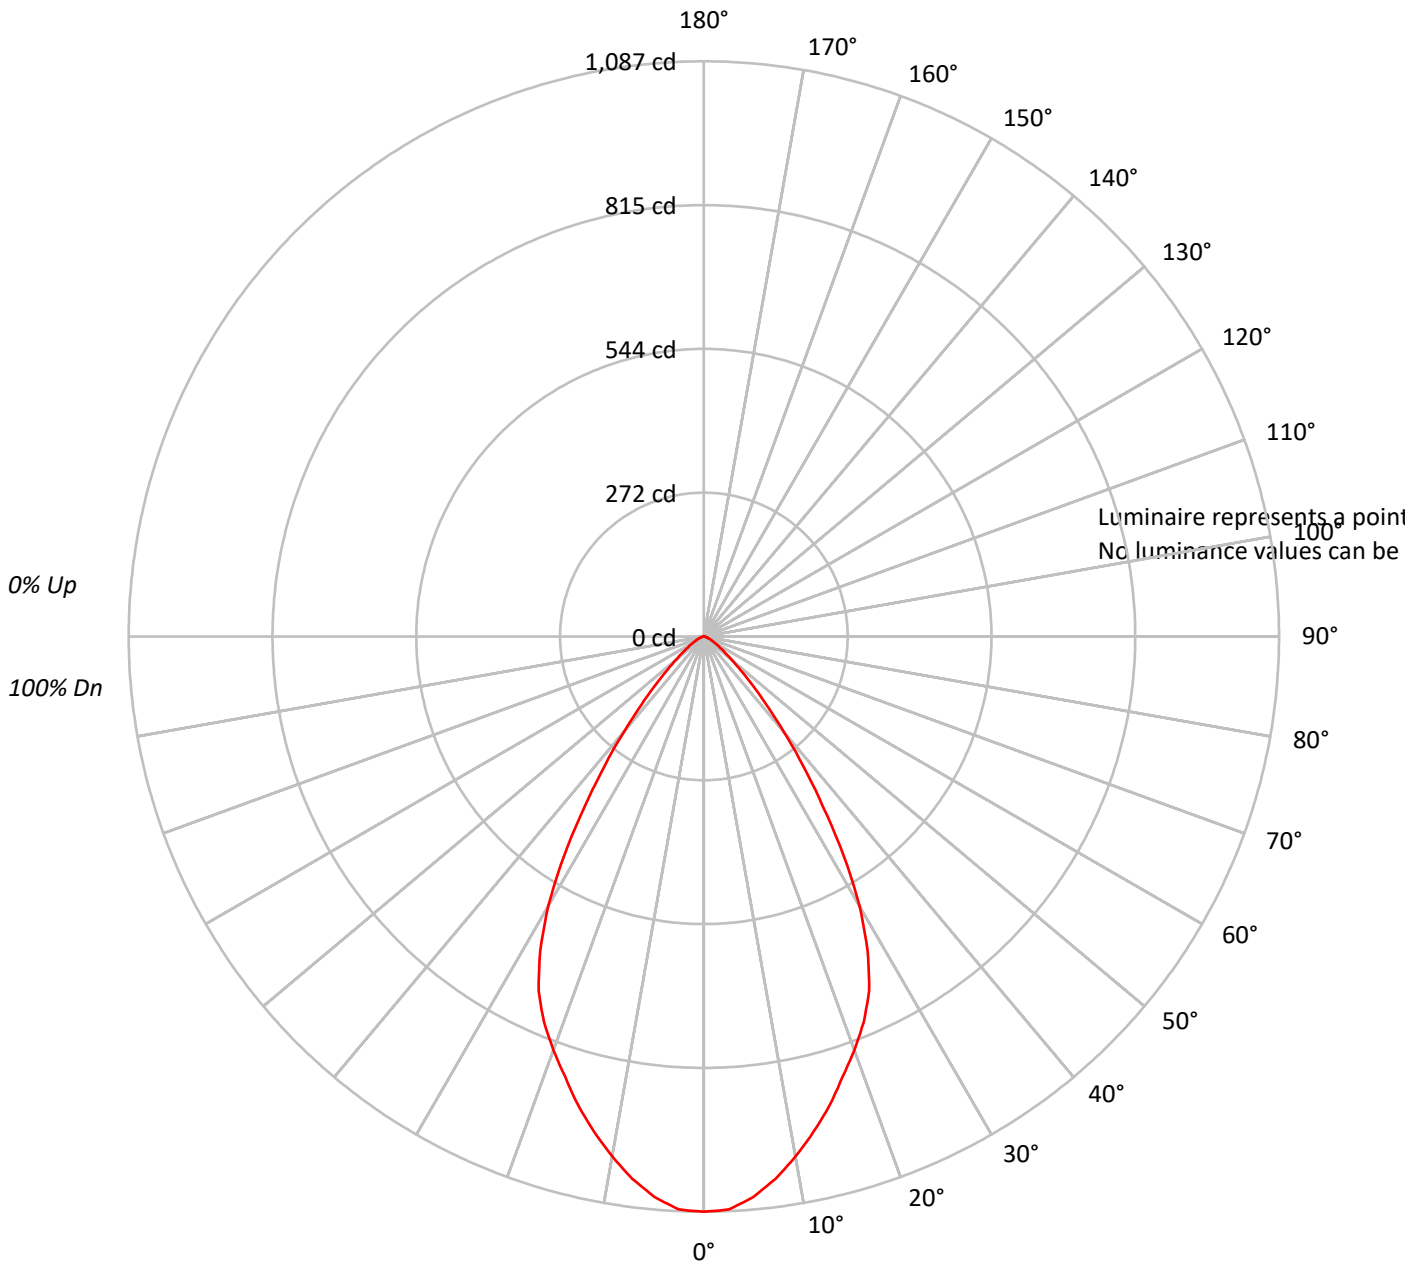



TEST NUMBER: P203224

CATALOG NUMBER: LD6B15D010 EU6B10208035 6LBMH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	92			92																
2	107	102	97	93	105	100	96	92	97	93	90	94	91	88	91	89	87	85			85																
3	101	94	88	84	99	92	87	84	90	86	82	87	84	81	85	82	80	78			78																
4	95	87	81	76	93	86	80	76	84	79	75	82	78	74	80	76	73	72			72																
5	90	81	75	70	88	80	74	70	78	73	69	76	72	68	75	71	68	66			66																
6	85	75	69	64	83	75	69	64	73	68	64	72	67	63	70	66	63	61			61																
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57			57																
8	76	66	60	55	75	65	59	55	64	59	55	63	58	55	62	58	54	53			53																
9	72	62	56	51	71	61	55	51	60	55	51	60	55	51	59	54	51	49			49																
10	69	58	52	48	68	58	52	48	57	52	48	56	51	48	55	51	48	46			46																

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P203224

CATALOG NUMBER: LD6B15D010 EU6B10208035 6LBMH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	99.4	9.0
10°-20°	257.1	23.4
20°-30°	333.2	30.3
30°-40°	247.4	22.5
40°-50°	104.4	9.5
50°-60°	37.1	3.4
60°-70°	14.3	1.3
70°-80°	4.9	0.5
80°-90°	0.7	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	689.7	62.8
0°-40°	937.1	85.3
0°-60°	1078.6	98.2
0°-90°	1098.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1098.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1087	
5°	1064	99
15°	918	257
25°	739	333
35°	392	247
45°	129	104
55°	39	37
65°	14	14
75°	5	5
85°	0	1
90°	0	



TEST NUMBER: P203224

CATALOG NUMBER: LD6B15D010 EU6B10208035 6LBMH1

CANDELA DISTRIBUTION (FULL):

0°	
0°	1087.1
2.5°	1084.0
5°	1063.6
7.5°	1033.8
10°	997.7
12.5°	958.5
15°	917.7
17.5°	872.2
20°	831.4
22.5°	789.0
25°	738.9
27.5°	669.8
30°	588.3
32.5°	492.6
35°	392.2
37.5°	307.5
40°	233.7
42.5°	174.1
45°	128.6
47.5°	94.1
50°	69.0
52.5°	51.8
55°	39.2
57.5°	29.8
60°	23.5
62.5°	17.3
65°	14.1
67.5°	11.0
70°	7.8
72.5°	6.3
75°	4.7
77.5°	3.1
80°	1.6
82.5°	1.6
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)