

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P252774

Luminaire Tested: **LD6B15D010 EU6B10209040 6LBBA1MW**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P252774
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1712-453-2)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD6B15D010 EU6B10209040 6LBBA1MW
Description: PORTFOLIO 6 INCH BAFFLE RECESSED DOWNLIGHT, WITH MATTE WHITE TRIM
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1619.0 lumens
Efficiency: N/A
Efficacy: 112.5 lumens/watt
Spacing Criteria (0/90/45): 1.03 / 1.03 / 1
Luminous Opening: Circular (Dia: 0.46' x H: 0')
CIE Type: Direct


Input Watts (W): 14.39
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P252774

CATALOG NUMBER: LD6B15D010 EU6B10209040 6LBBA1MW

Luminous Intensity Polar Plot

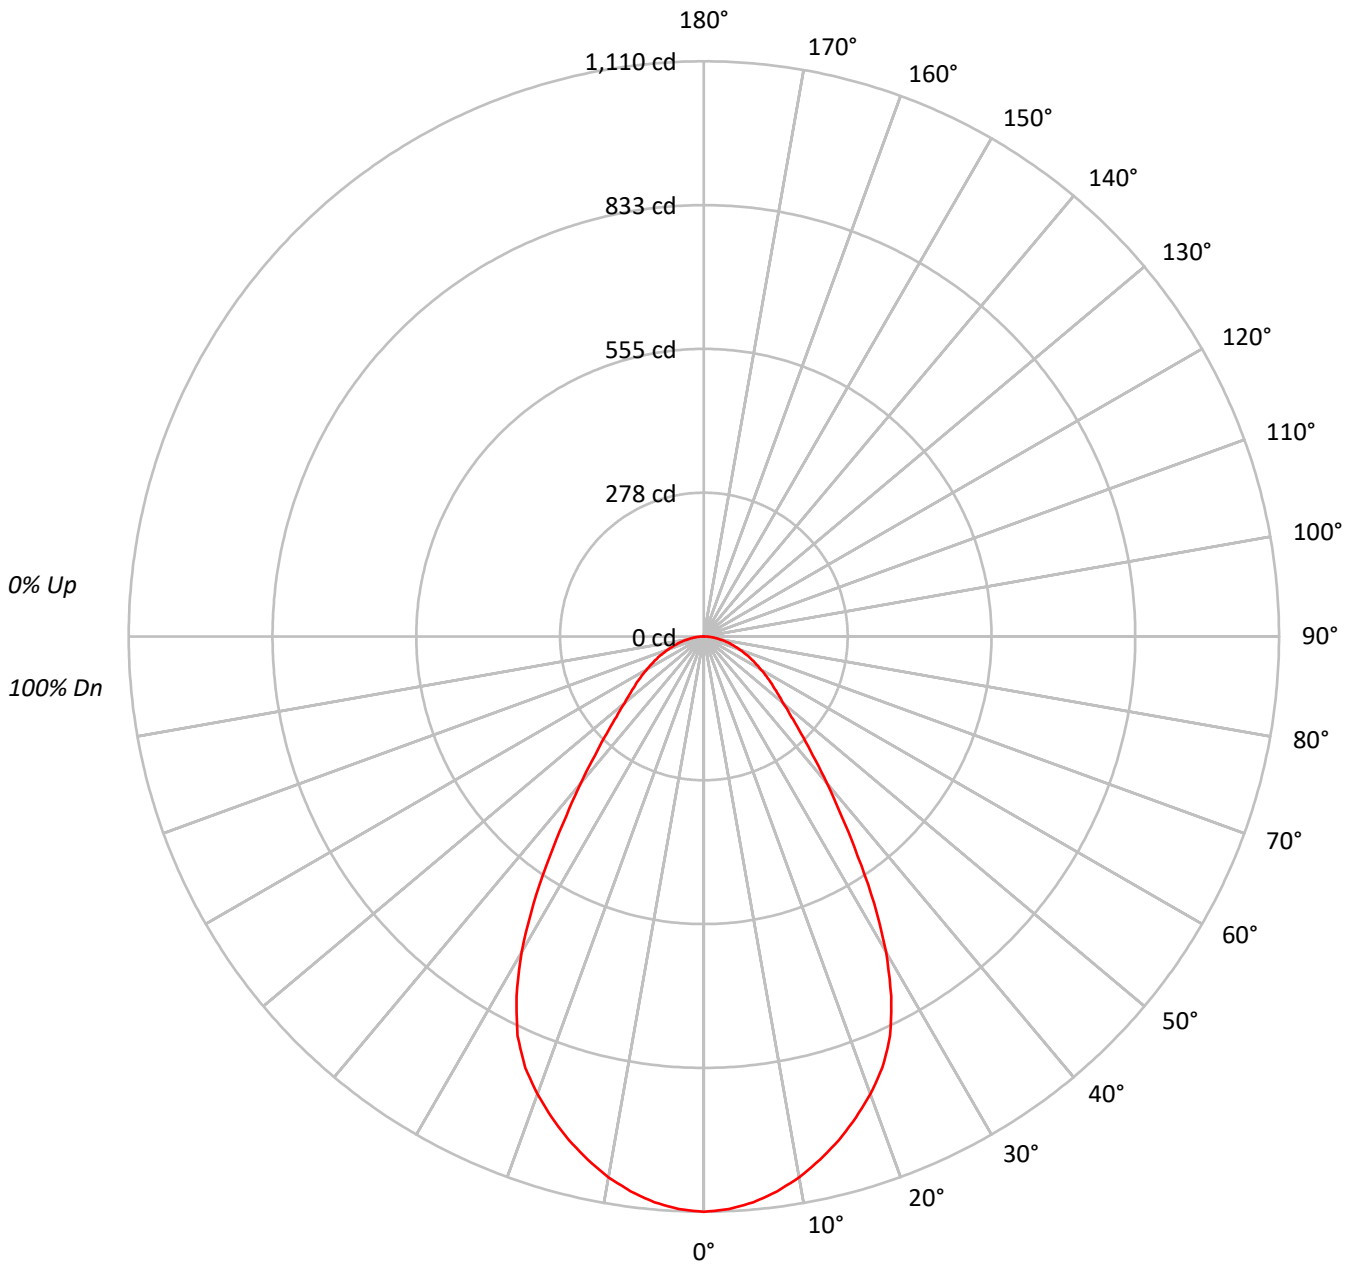



TEST NUMBER: P252774

CATALOG NUMBER: LD6B15D010 EU6B10209040 6LBBA1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	111	107	104	101	108	105	102	99	101	98	96	97	95	93	94	92	90	88				88
2	103	97	91	87	101	95	90	86	91	87	84	88	85	82	85	83	80	78				78
3	96	87	81	76	94	86	80	75	83	78	74	81	76	72	78	74	71	69				69
4	90	80	72	67	87	78	72	66	76	70	66	74	69	65	72	68	64	62				62
5	84	73	65	60	82	72	65	60	70	64	59	68	63	58	66	62	58	56				56
6	78	67	60	54	77	66	59	54	65	58	54	63	57	53	62	57	53	51				51
7	74	62	55	49	72	61	54	49	60	53	49	59	53	49	57	52	48	47				47
8	69	58	50	45	68	57	50	45	56	49	45	55	49	45	53	48	44	43				43
9	65	54	46	42	64	53	46	42	52	46	41	51	45	41	50	45	41	39				39
10	62	50	43	39	61	50	43	39	49	43	38	48	42	38	47	42	38	37				37

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	72443
5°	71783
10°	70202
15°	67968
20°	65227
25°	61230
30°	52982
35°	41256
40°	31358
45°	24441
50°	20269
55°	18199
60°	16571
65°	15283
70°	14039
75°	13007
80°	11760
85°	10779



TEST NUMBER: P252774

CATALOG NUMBER: LD6B15D010 EU6B10209040 6LBBA1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	103.5	6.4
10°-20°	282.8	17.5
20°-30°	385.1	23.8
30°-40°	325.9	20.1
40°-50°	209.0	12.9
50°-60°	143.8	8.9
60°-70°	98.3	6.1
70°-80°	54.7	3.4
80°-90°	16.0	1.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	771.3	47.6
0°-40°	1097.2	67.8
0°-60°	1450.0	89.6
0°-90°	1619.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1619.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1110	
5°	1096	103
15°	1006	283
25°	851	385
35°	518	326
45°	265	209
55°	160	144
65°	99	98
75°	52	55
85°	14	16
90°	0	



TEST NUMBER: P252774

CATALOG NUMBER: LD6B15D010 EU6B10209040 6LBBA1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	1110.4
2.5°	1106.2
5°	1096.1
7.5°	1080.0
10°	1059.7
12.5°	1034.3
15°	1006.3
17.5°	974.2
20°	939.5
22.5°	900.5
25°	850.6
27.5°	782.9
30°	703.3
32.5°	611.9
35°	518.0
37.5°	435.9
40°	368.2
42.5°	311.5
45°	264.9
47.5°	228.5
50°	199.7
52.5°	177.7
55°	160.0
57.5°	143.0
60°	127.0
62.5°	112.6
65°	99.0
67.5°	85.5
70°	73.6
72.5°	61.8
75°	51.6
77.5°	41.5
80°	31.3
82.5°	22.9
85°	14.4
87.5°	5.9
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)