

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P203334

Luminaire Tested: **LD6B15D010 EU6B10209040 6LBMWH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P203334
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD6B15D010 EU6B10209040 6LBMWH1
Description: PORTFOLIO 6 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT
MEDIUM DISTRIBUTION WITH WHEAT TRIM
WATTAGE D010TR-14.39 W DE010-14.29 W D5LT-14.34 W DMX-14.46 W DL2-15.8 W
DL3-15.28 W DLE-15.432 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1004.5 lumens
Efficiency: N/A
Efficacy: 70.2 lumens/watt
Spacing Criteria (0/90/45): 0.83 / 0.83 / 0.85
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 14.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P203334

CATALOG NUMBER: LD6B15D010 EU6B10209040 6LBMWH1

Luminous Intensity Polar Plot

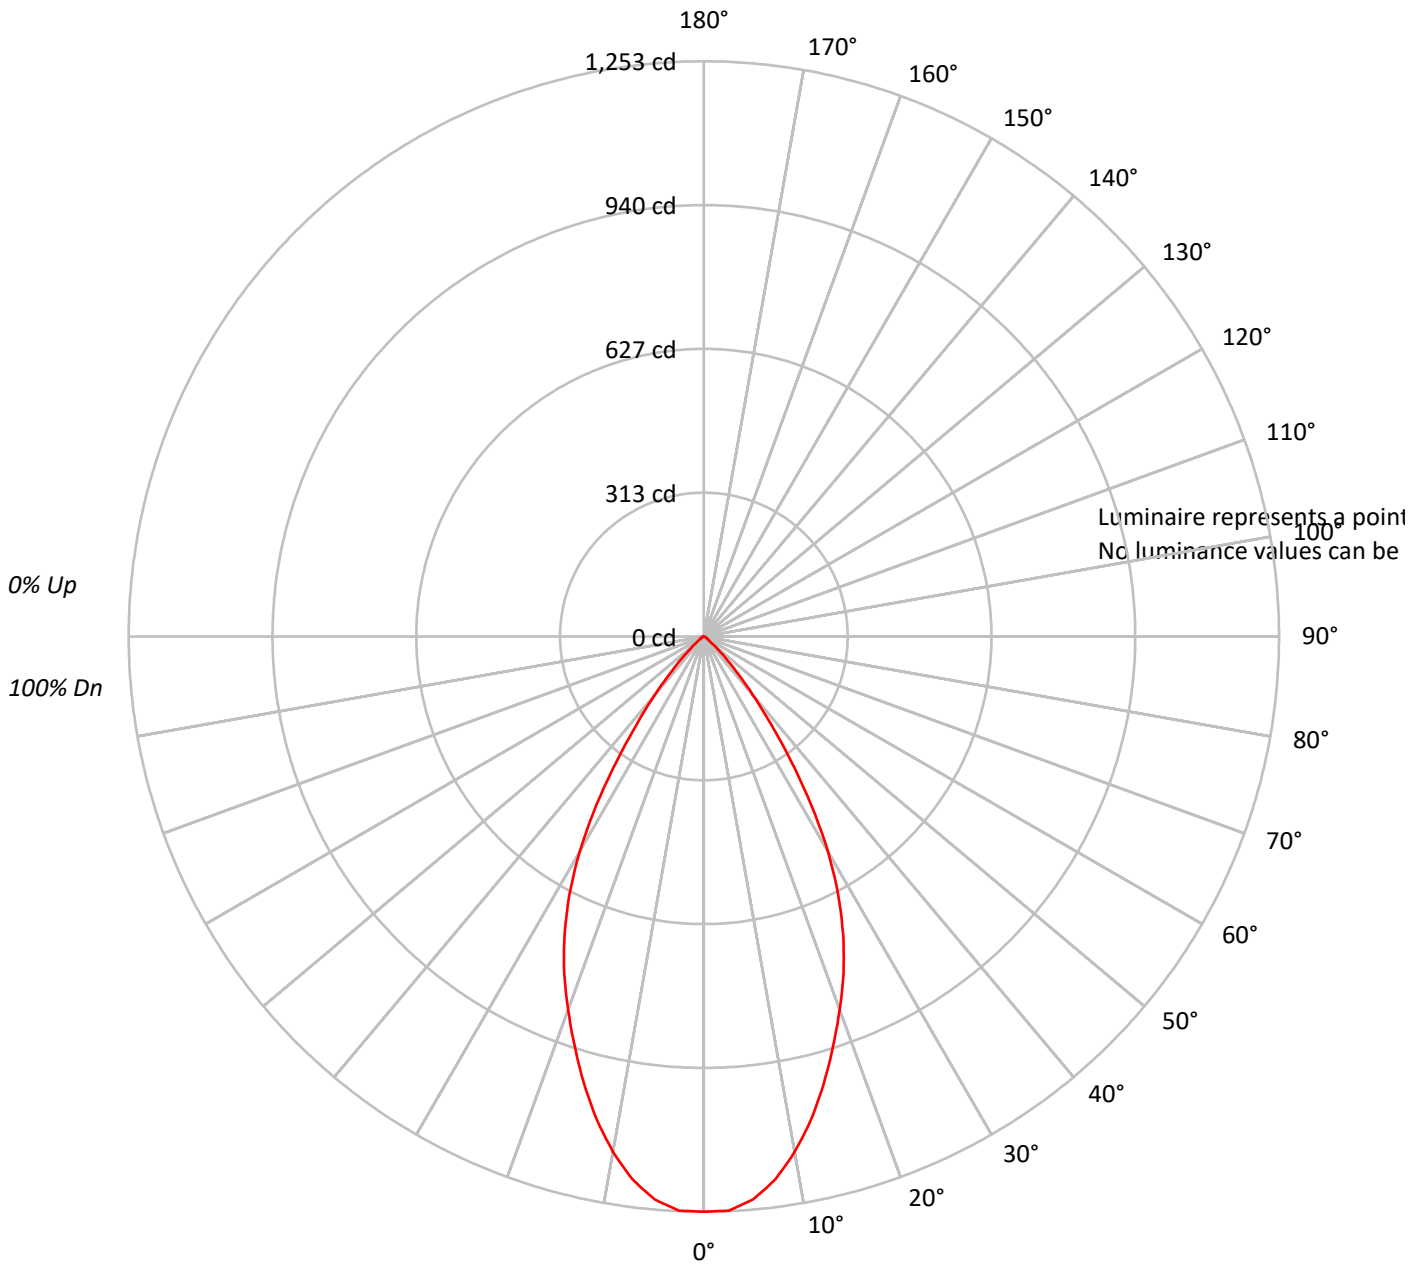



TEST NUMBER: P203334

CATALOG NUMBER: LD6B15D010 EU6B10209040 6LBMWH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									20																	
RC	80									70									50									30									10									0								
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																								
RCR	0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																																			
	1	114	111	108	106	111	109	106	104	105	103	101	101	100	98	97	96	95	94																																			
	2	108	103	99	96	106	101	98	95	98	95	93	95	93	91	92	91	89	87																																			
	3	103	96	91	87	101	95	90	87	92	88	85	90	87	84	88	85	83	81																																			
	4	97	90	85	80	96	89	84	80	87	82	79	85	81	78	83	80	77	76																																			
	5	93	84	79	74	91	83	78	74	82	77	73	80	76	73	78	75	72	71																																			
	6	88	79	73	69	87	78	73	69	77	72	68	76	71	68	74	70	67	66																																			
	7	84	75	69	64	82	74	68	64	73	68	64	71	67	64	70	66	63	62																																			
	8	80	70	64	60	78	70	64	60	69	64	60	68	63	60	67	62	59	58																																			
	9	76	66	61	57	75	66	60	57	65	60	56	64	59	56	63	59	56	55																																			
	10	72	63	57	53	71	62	57	53	62	57	53	61	56	53	60	56	53	52																																			

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P203334

CATALOG NUMBER: LD6B15D010 EU6B10209040 6LBMWH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	114.6	11.4
10°-20°	281.2	28.0
20°-30°	325.4	32.4
30°-40°	208.0	20.7
40°-50°	59.0	5.9
50°-60°	10.5	1.0
60°-70°	4.3	0.4
70°-80°	1.5	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	721.2	71.8
0°-40°	929.2	92.5
0°-60°	998.7	99.4
0°-90°	1004.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1004.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1253	
5°	1231	115
15°	1009	281
25°	718	325
35°	328	208
45°	68	59
55°	10	11
65°	4	4
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P203334

CATALOG NUMBER: LD6B15D010 EU6B10209040 6LBMWH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	1253.1
2.5°	1251.7
5°	1230.8
7.5°	1193.0
10°	1140.0
12.5°	1078.5
15°	1008.6
17.5°	936.0
20°	864.7
22.5°	794.9
25°	718.1
27.5°	634.2
30°	540.6
32.5°	435.9
35°	328.3
37.5°	237.5
40°	164.8
42.5°	109.0
45°	68.5
47.5°	40.5
50°	23.7
52.5°	14.0
55°	9.8
57.5°	8.4
60°	7.0
62.5°	5.6
65°	4.2
67.5°	2.8
70°	2.8
72.5°	1.4
75°	1.4
77.5°	1.4
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)