

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P205181

Luminaire Tested: **LD6B15D010 EU6B10208050 6LBWLI1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P205181
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD6B15D010 EU6B10208050 6LBWLI1
Description: PORTFOLIO 6 INCH 60 DEGREE CUTOFF RECESSED DOWNLIGHT
WIDE DISTRIBUTION WITH SPECULAR CLEAR TRIM
WATTAGE D010TR-14.39 W DE010-14.29 W D5LT-14.34 W DMX-14.46 W DL2-15.8 W
DL3-15.28 W DLE-15.432 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1534.0 lumens
Efficiency: N/A
Efficacy: 107.3 lumens/watt
Spacing Criteria (0/90/45): 1.24 / 1.24 / 1.18
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 14.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P205181

CATALOG NUMBER: LD6B15D010 EU6B10208050 6LBWLI1

Luminous Intensity Polar Plot

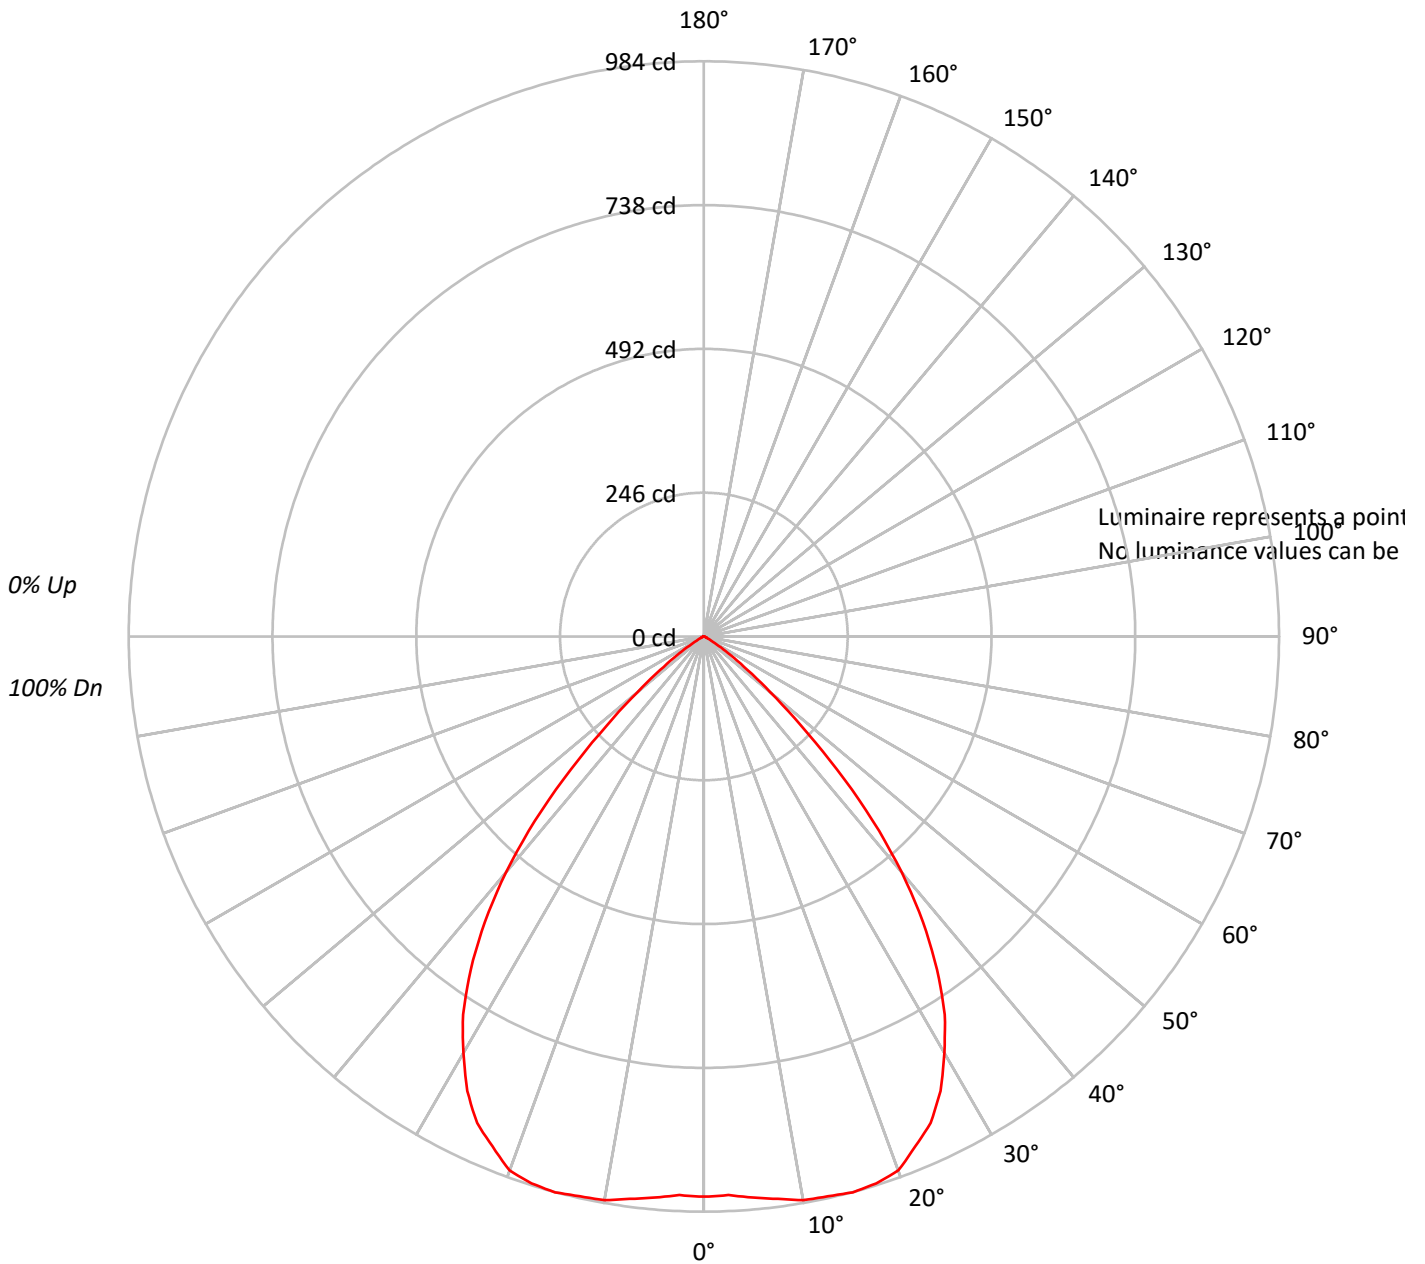



TEST NUMBER: P205181

CATALOG NUMBER: LD6B15D010 EU6B10208050 6LBWLI1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	110	107	104	110	107	105	103	103	101	99	100	98	97	96	95	94	92			
2	106	101	96	92	104	99	95	91	95	92	89	92	90	87	90	87	85	83			
3	100	92	87	82	97	91	86	81	88	84	80	86	82	79	83	80	77	76			
4	93	85	78	74	92	84	78	73	81	76	72	79	75	71	77	74	70	69			
5	88	78	71	66	86	77	71	66	75	70	65	73	69	65	72	68	64	63			
6	82	72	65	60	81	71	65	60	70	64	59	68	63	59	67	62	59	57			
7	77	67	60	55	76	66	59	55	65	59	54	63	58	54	62	57	54	52			
8	73	62	55	50	71	61	55	50	60	54	50	59	54	50	58	53	49	48			
9	69	57	51	46	67	57	50	46	56	50	46	55	50	46	54	49	46	44			
10	65	54	47	43	64	53	47	42	52	46	42	51	46	42	51	46	42	41			

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P205181

CATALOG NUMBER: LD6B15D010 EU6B10208050 6LBWLI1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	92.5	6.0
10°-20°	277.9	18.1
20°-30°	418.9	27.3
30°-40°	428.7	27.9
40°-50°	249.8	16.3
50°-60°	57.4	3.7
60°-70°	7.1	0.5
70°-80°	1.8	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	789.2	51.4
0°-40°	1217.9	79.4
0°-60°	1525.1	99.4
0°-90°	1534.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1534.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	958	
5°	964	92
15°	984	278
25°	918	419
35°	696	429
45°	322	250
55°	56	57
65°	5	7
75°	2	2
85°	0	0
90°	0	



TEST NUMBER: P205181

CATALOG NUMBER: LD6B15D010 EU6B10208050 6LBWLI1

CANDELA DISTRIBUTION (FULL):

0°	
0°	958.3
2.5°	956.6
5°	963.5
7.5°	970.5
10°	979.2
12.5°	980.9
15°	984.4
17.5°	980.9
20°	972.2
22.5°	944.4
25°	918.3
27.5°	876.6
30°	822.6
32.5°	767.0
35°	695.7
37.5°	615.7
40°	527.0
42.5°	427.8
45°	321.8
47.5°	224.4
50°	147.8
52.5°	93.9
55°	55.7
57.5°	29.6
60°	15.7
62.5°	8.7
65°	5.2
67.5°	5.2
70°	3.5
72.5°	1.7
75°	1.7
77.5°	1.7
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)