

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P205187

Luminaire Tested: **LD6B15D010 EU6B10209050 6LBWLI1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P205187
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD6B15D010 EU6B10209050 6LBWLI1
Description: PORTFOLIO 6 INCH 60 DEGREE CUTOFF RECESSED DOWNLIGHT
WIDE DISTRIBUTION WITH SPECULAR CLEAR TRIM
WATTAGE D010TR-14.39 W DE010-14.29 W D5LT-14.34 W DMX-14.46 W DL2-15.8 W
DL3-15.28 W DLE-15.432 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1290.7 lumens
Efficiency: N/A
Efficacy: 90.3 lumens/watt
Spacing Criteria (0/90/45): 1.24 / 1.24 / 1.18
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 14.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P205187

CATALOG NUMBER: LD6B15D010 EU6B10209050 6LBWLI1

Luminous Intensity Polar Plot

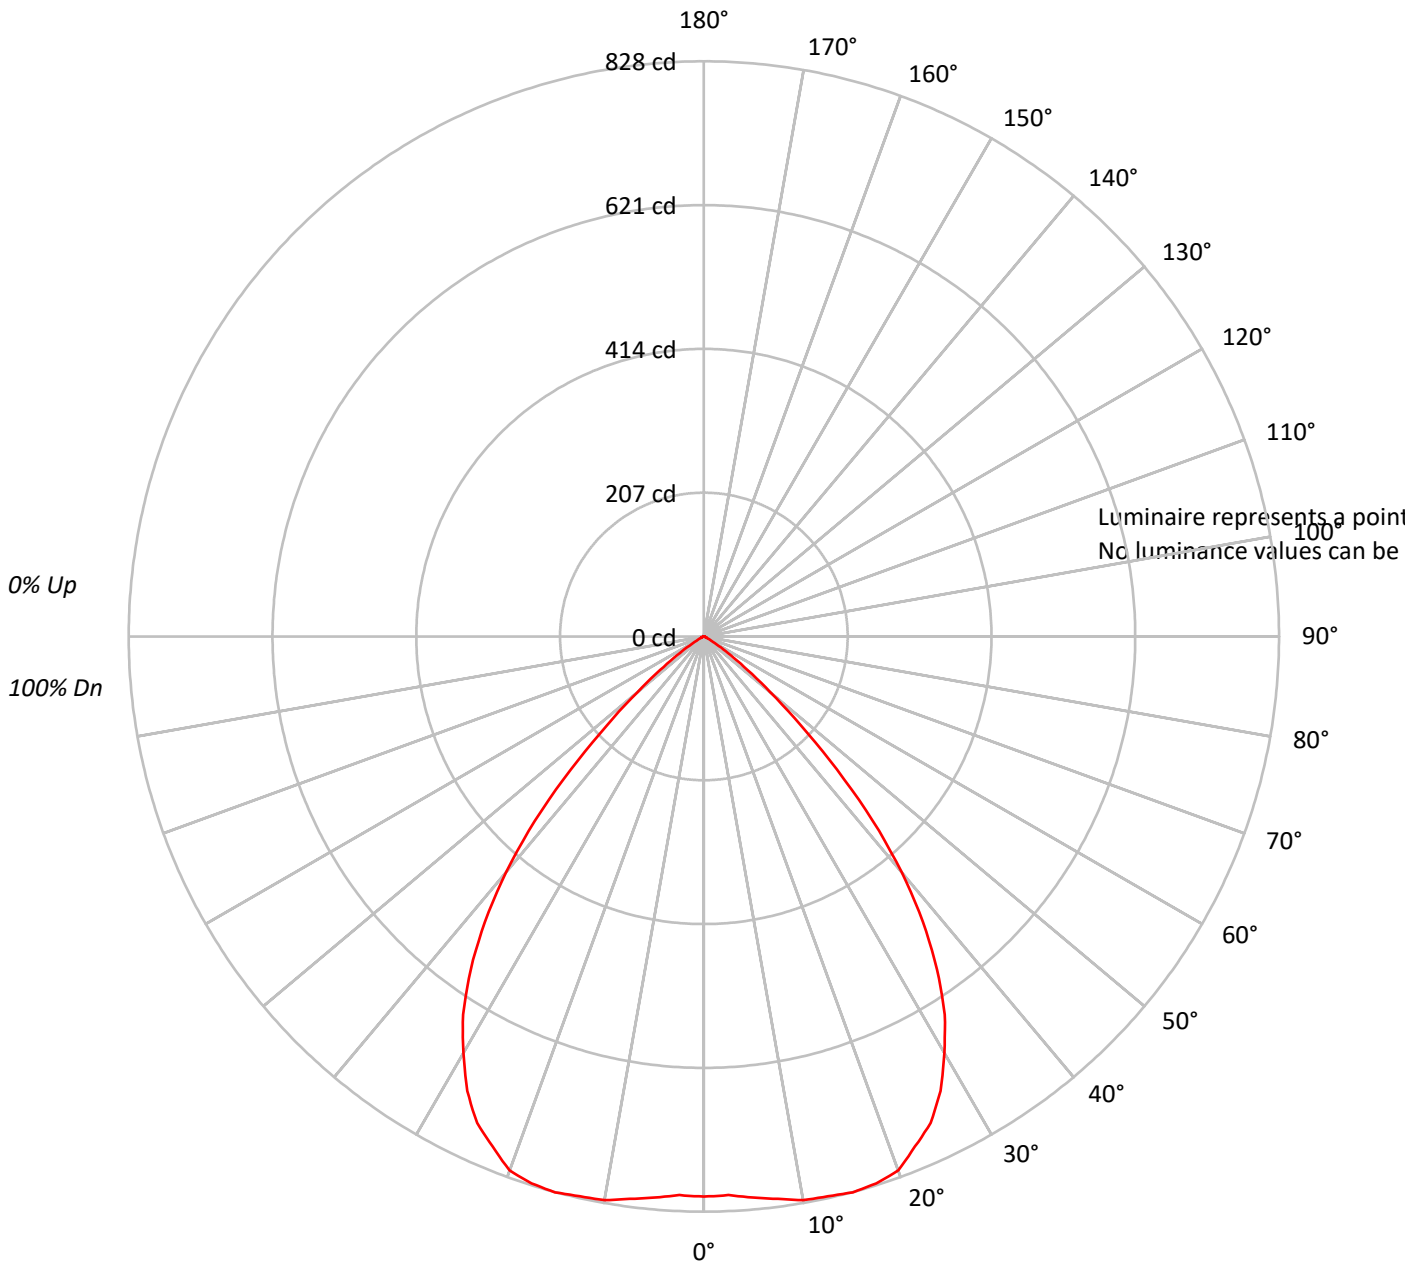



TEST NUMBER: P205187

CATALOG NUMBER: LD6B15D010 EU6B10209050 6LBWLI1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	110	107	104	110	107	105	103	103	101	99	100	98	97	96	95	94	92			
2	106	101	96	92	104	99	95	91	95	92	89	92	90	87	90	87	85	83			
3	100	92	87	82	97	91	86	81	88	84	80	86	82	79	83	80	77	76			
4	93	85	78	73	92	84	78	73	81	76	72	79	75	71	77	74	70	69			
5	88	78	71	66	86	77	71	66	75	70	65	73	69	65	72	68	64	63			
6	82	72	65	60	81	71	65	60	70	64	59	68	63	59	67	62	59	57			
7	77	67	60	55	76	66	59	55	65	59	54	63	58	54	62	57	54	52			
8	73	62	55	50	71	61	55	50	60	54	50	59	54	50	58	53	49	48			
9	69	57	51	46	67	57	50	46	56	50	46	55	50	46	54	49	46	44			
10	65	54	47	43	64	53	47	42	52	46	42	51	46	42	51	46	42	41			

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P205187

CATALOG NUMBER: LD6B15D010 EU6B10209050 6LBWLI1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	77.8	6.0
10°-20°	233.8	18.1
20°-30°	352.4	27.3
30°-40°	360.7	27.9
40°-50°	210.2	16.3
50°-60°	48.3	3.7
60°-70°	5.9	0.5
70°-80°	1.6	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	664.0	51.4
0°-40°	1024.8	79.4
0°-60°	1283.2	99.4
0°-90°	1290.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1290.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	806	
5°	811	78
15°	828	234
25°	773	352
35°	585	361
45°	271	210
55°	47	48
65°	4	6
75°	2	2
85°	0	0
90°	0	



TEST NUMBER: P205187

CATALOG NUMBER: LD6B15D010 EU6B10209050 6LBWLI1

CANDELA DISTRIBUTION (FULL):

0°	
0°	806.3
2.5°	804.9
5°	810.7
7.5°	816.6
10°	823.9
12.5°	825.4
15°	828.3
17.5°	825.4
20°	818.0
22.5°	794.6
25°	772.7
27.5°	737.5
30°	692.2
32.5°	645.4
35°	585.4
37.5°	518.0
40°	443.4
42.5°	360.0
45°	270.7
47.5°	188.8
50°	124.4
52.5°	79.0
55°	46.8
57.5°	24.9
60°	13.2
62.5°	7.3
65°	4.4
67.5°	4.4
70°	2.9
72.5°	1.5
75°	1.5
77.5°	1.5
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)