

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P205096

Luminaire Tested: **LD6B20D010 EU6B10209030 6LBMLI1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P205096
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD6B20D010 EU6B10209030 6LBMLI1
Description: PORTFOLIO 6 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT
MEDIUM DISTRIBUTION WITH SPECULAR CLEAR TRIM
WATTAGE D010TR-21.86 W DE010-20.46 W D5LT-21.24 W DMX-20.89 W DL2-22.5 W
DL3-21.8 6 W DLE-22.46 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1557.7 lumens
Efficiency: N/A
Efficacy: 74.9 lumens/watt
Spacing Criteria (0/90/45): 0.85 / 0.85 / 0.85
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 20.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P205096

CATALOG NUMBER: LD6B20D010 EU6B10209030 6LBMLI1

Luminous Intensity Polar Plot

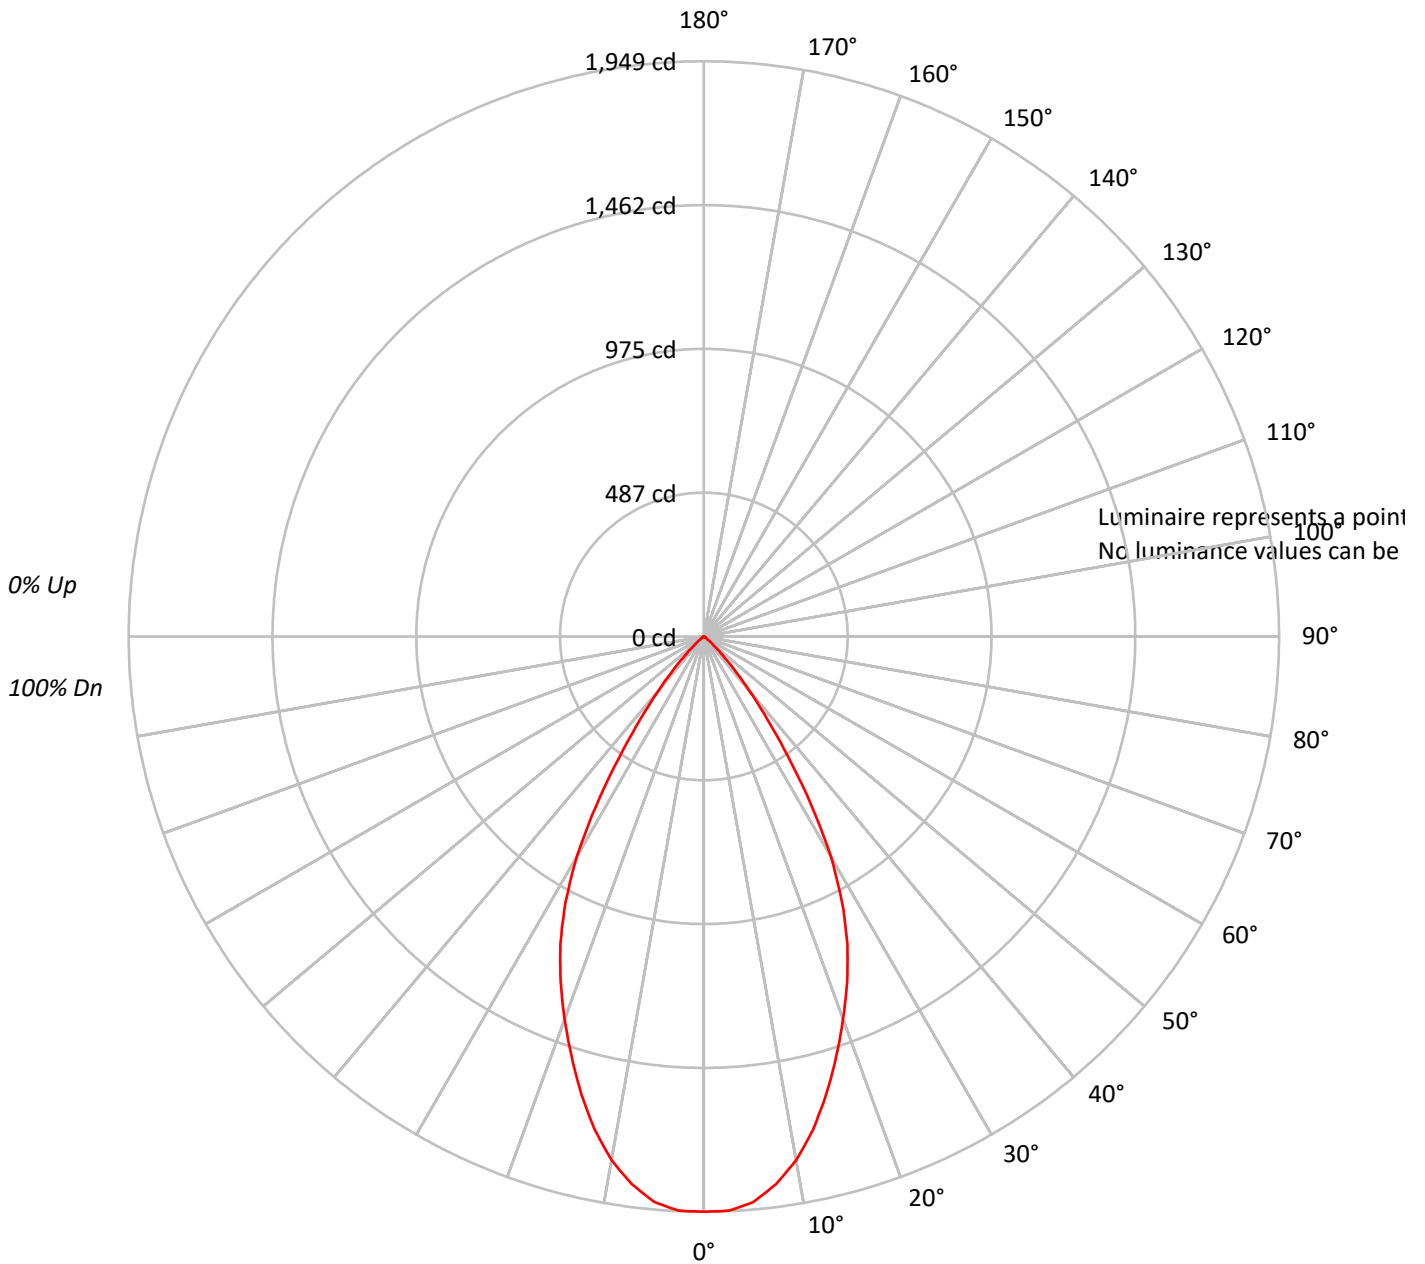



TEST NUMBER: P205096

CATALOG NUMBER: LD6B20D010 EU6B10209030 6LBMLI1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									20									
RC	80									70									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																														
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																												
1	114	111	109	106	111	109	107	105	105	103	101	101	100	98	98	97	96	94																												
2	108	103	100	96	106	102	98	95	99	96	93	96	93	91	93	91	89	88																												
3	103	97	92	88	101	95	91	87	93	89	86	90	87	85	88	85	83	82																												
4	98	91	85	81	96	89	84	81	87	83	80	85	82	79	83	80	78	76																												
5	93	85	79	75	91	84	79	75	82	78	74	81	77	73	79	76	73	71																												
6	89	80	74	70	87	79	74	70	78	73	69	76	72	69	75	71	68	67																												
7	84	75	69	65	83	75	69	65	73	68	65	72	68	64	71	67	64	63																												
8	80	71	65	61	79	70	65	61	69	64	61	68	64	60	67	63	60	59																												
9	77	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55																												
10	73	64	58	54	72	63	58	54	62	57	54	62	57	54	61	57	54	52																												

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P205096

CATALOG NUMBER: LD6B20D010 EU6B10209030 6LBMLI1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	179.6	11.5
10°-20°	447.1	28.7
20°-30°	519.7	33.4
30°-40°	318.3	20.4
40°-50°	79.0	5.1
50°-60°	9.3	0.6
60°-70°	3.4	0.2
70°-80°	1.3	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1146.4	73.6
0°-40°	1464.7	94.0
0°-60°	1553.0	99.7
0°-90°	1557.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1557.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1949	
5°	1924	180
15°	1605	447
25°	1150	520
35°	498	318
45°	88	79
55°	8	9
65°	4	3
75°	2	1
85°	0	0
90°	0	



TEST NUMBER: P205096

CATALOG NUMBER: LD6B20D010 EU6B10209030 6LBMLI1

CANDELA DISTRIBUTION (FULL):

0°	
0°	1949.4
2.5°	1947.4
5°	1923.5
7.5°	1871.7
10°	1801.9
12.5°	1710.2
15°	1604.6
17.5°	1490.9
20°	1379.3
22.5°	1267.7
25°	1150.1
27.5°	1014.6
30°	859.1
32.5°	677.7
35°	498.3
37.5°	350.8
40°	239.2
42.5°	149.5
45°	87.7
47.5°	49.8
50°	25.9
52.5°	12.0
55°	8.0
57.5°	6.0
60°	6.0
62.5°	4.0
65°	4.0
67.5°	2.0
70°	2.0
72.5°	2.0
75°	2.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)