

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P204473

Luminaire Tested: **LD6B20D010 EU6B10208035 6LBSB1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P204473
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD6B20D010 EU6B10208035 6LBSB1
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT
SHALLOW DISTRIBUTION WITH SPECULAR BLACK TRIM
WATTAGE D010TR-21.86 W DE010-20.46 W D5LT-21.24 W DMX-20.89 W DL2-22.5 W
DL3-21.8 6 W DLE-22.46 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1911.9 lumens
Efficiency: N/A
Efficacy: 91.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.2 / 1.3
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 20.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P204473

CATALOG NUMBER: LD6B20D010 EU6B10208035 6LBSB1

Luminous Intensity Polar Plot

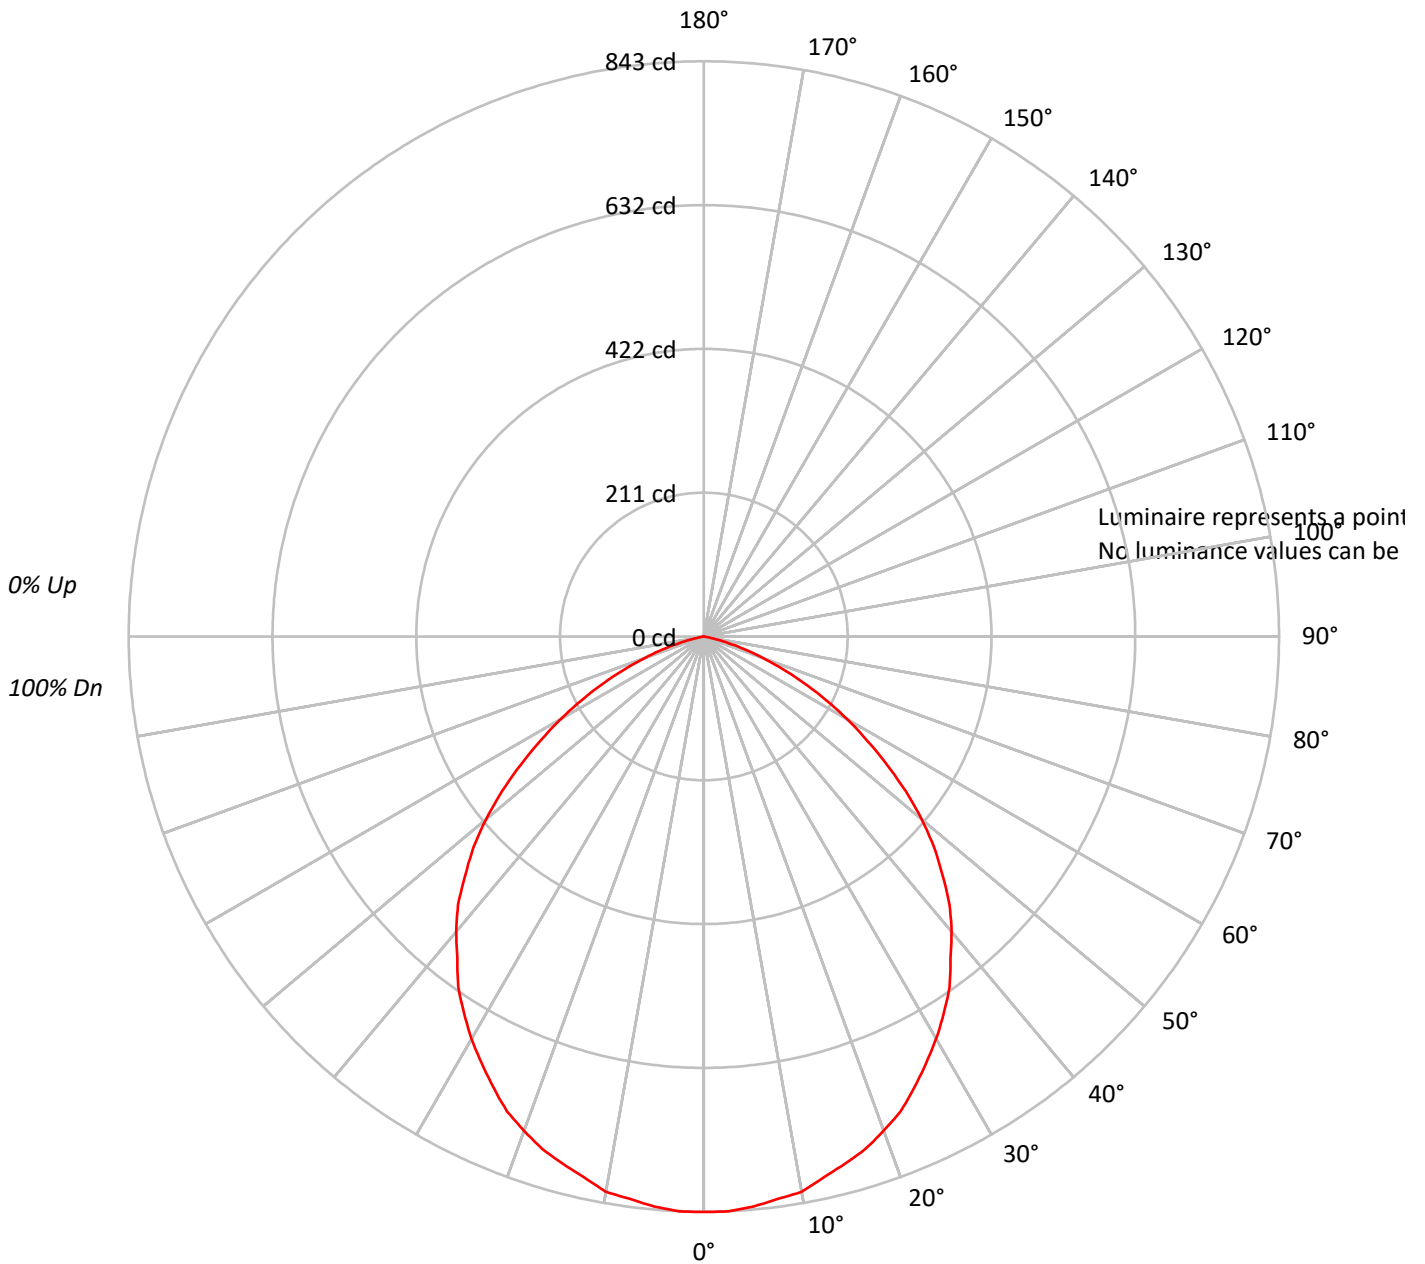



TEST NUMBER: P204473

CATALOG NUMBER: LD6B20D010 EU6B10208035 6LBSB1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	111	107	103	100	108	105	101	98	100	98	95	97	94	93	93	91	90	88				88
2	102	95	89	84	100	93	88	83	90	85	81	86	83	79	84	80	78	76				76
3	94	84	77	72	91	83	76	71	80	74	70	77	73	68	75	71	67	65				65
4	86	76	68	62	84	74	67	61	72	65	60	70	64	60	68	63	59	57				57
5	80	68	60	54	78	67	59	53	65	58	53	63	57	52	61	56	52	50				50
6	74	62	53	47	72	61	53	47	59	52	47	57	51	46	56	50	46	44				44
7	69	56	48	42	67	55	48	42	54	47	42	52	46	41	51	45	41	39				39
8	64	51	43	38	63	51	43	38	49	42	37	48	42	37	47	41	37	35				35
9	60	47	39	34	59	47	39	34	46	39	34	45	38	34	44	38	34	32				32
10	56	44	36	31	55	43	36	31	42	36	31	41	35	31	40	35	31	29				29

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P204473

CATALOG NUMBER: LD6B20D010 EU6B10208035 6LBSB1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	79.6	4.2
10°-20°	225.9	11.8
20°-30°	336.0	17.6
30°-40°	391.0	20.4
40°-50°	381.1	19.9
50°-60°	293.1	15.3
60°-70°	162.0	8.5
70°-80°	42.9	2.2
80°-90°	0.3	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	641.4	33.5
0°-40°	1032.4	54.0
0°-60°	1706.6	89.3
0°-90°	1911.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1911.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	843	
5°	838	80
15°	800	226
25°	730	336
35°	628	391
45°	494	381
55°	327	293
65°	162	162
75°	36	43
85°	0	0
90°	0	



TEST NUMBER: P204473

CATALOG NUMBER: LD6B20D010 EU6B10208035 6LBSB1

CANDELA DISTRIBUTION (FULL):

	0°
0°	843.4
2.5°	843.4
5°	838.5
7.5°	831.3
10°	826.4
12.5°	811.9
15°	799.8
17.5°	787.6
20°	770.7
22.5°	753.7
25°	729.5
27.5°	705.2
30°	681.0
32.5°	654.4
35°	627.7
37.5°	593.8
40°	564.7
42.5°	533.2
45°	494.4
47.5°	458.0
50°	416.8
52.5°	373.2
55°	327.2
57.5°	283.6
60°	242.4
62.5°	201.2
65°	162.4
67.5°	126.0
70°	92.1
72.5°	63.0
75°	36.4
77.5°	17.0
80°	2.4
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)