

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P204376

Luminaire Tested: **LD6B20D010 EU6B10209035 6LBSGPH1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P204376  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LD6B20D010 EU6B10209035 6LBSGPH1  
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT  
SHALLOW DISTRIBUTION WITH GRAPHITE HAZE TRIM  
WATTAGE D010TR-21.86 W DE010-20.46 W D5LT-21.24 W DMX-20.89 W DL2-22.5 W  
DL3-21.8 6 W DLE-22.46 W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1687.1 lumens  
Efficiency: N/A  
Efficacy: 81.1 lumens/watt  
Spacing Criteria (0/90/45): 1.16 / 1.16 / 1.26  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 20.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P204376

CATALOG NUMBER: LD6B20D010 EU6B10209035 6LBSGPH1

### Luminous Intensity Polar Plot

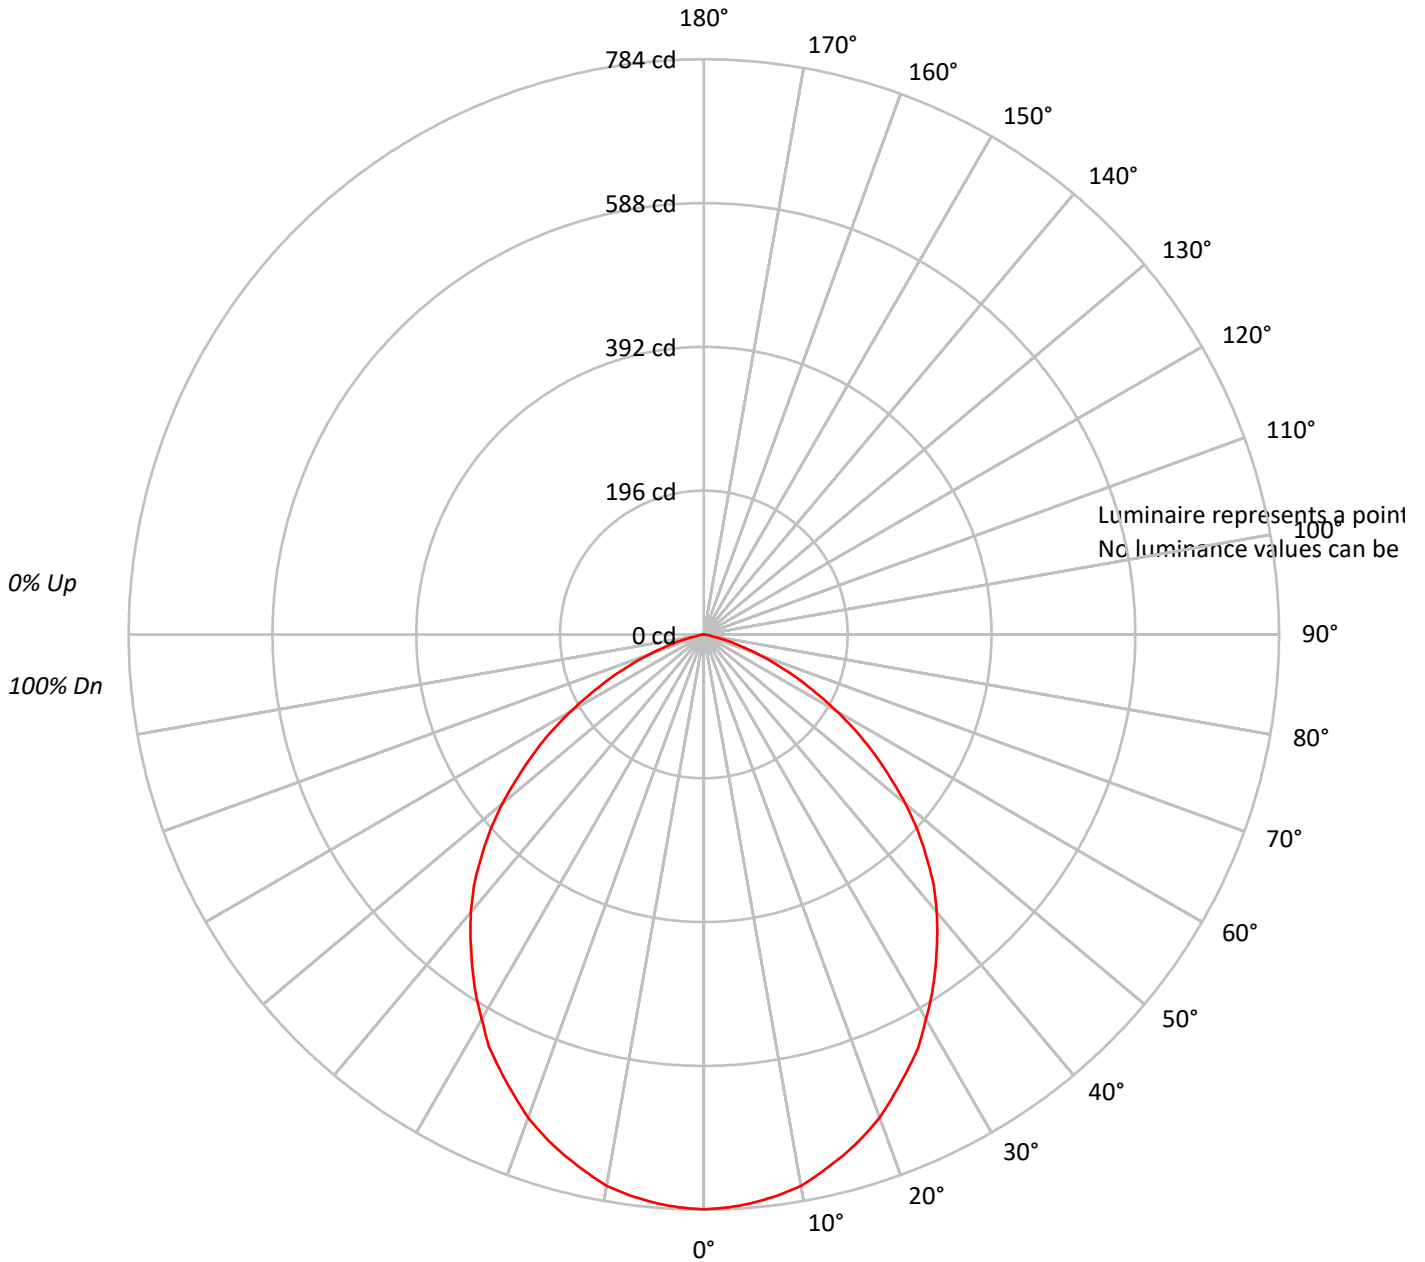



TEST NUMBER: P204376

CATALOG NUMBER: LD6B20D010 EU6B10209035 6LBSGPH1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	111	107	103	100	108	105	102	99	101	98	96	97	95	93	93	91	90	88		
2	102	95	89	84	100	93	88	83	90	85	82	87	83	80	84	81	78	76		
3	94	85	78	72	92	83	77	71	80	75	70	78	73	69	75	71	68	66		
4	87	76	68	62	85	75	67	62	72	66	61	70	65	60	68	63	59	57		
5	80	68	60	54	78	67	60	54	65	59	53	63	58	53	62	56	52	50		
6	74	62	54	48	73	61	53	48	59	52	47	58	52	47	56	51	47	45		
7	69	57	48	43	68	56	48	43	54	47	42	53	47	42	52	46	42	40		
8	65	52	44	38	63	51	44	38	50	43	38	49	42	38	48	42	38	36		
9	60	48	40	35	59	47	40	35	46	39	35	45	39	34	44	38	34	32		
10	57	44	37	32	56	44	36	32	43	36	31	42	36	31	41	35	31	30		

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P204376

CATALOG NUMBER: LD6B20D010 EU6B10209035 6LBSGPH1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	73.8	4.4
10°-20°	207.1	12.3
20°-30°	302.0	17.9
30°-40°	344.4	20.4
40°-50°	330.4	19.6
50°-60°	253.1	15.0
60°-70°	138.9	8.2
70°-80°	36.9	2.2
80°-90°	0.5	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	582.9	34.6
0°-40°	927.3	55.0
0°-60°	1510.8	89.5
0°-90°	1687.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1687.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	784	
5°	778	74
15°	735	207
25°	656	302
35°	551	344
45°	429	330
55°	284	253
65°	140	139
75°	32	37
85°	0	1
90°	0	



TEST NUMBER: P204376

CATALOG NUMBER: LD6B20D010 EU6B10209035 6LBSGPH1

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	783.6
2.5°	781.6
5°	777.5
7.5°	771.4
10°	763.3
12.5°	749.2
15°	735.0
17.5°	718.8
20°	700.6
22.5°	678.3
25°	656.0
27.5°	633.8
30°	605.4
32.5°	579.1
35°	550.7
37.5°	522.4
40°	494.0
42.5°	463.7
45°	429.2
47.5°	394.8
50°	358.4
52.5°	319.9
55°	283.5
57.5°	247.0
60°	208.6
62.5°	172.1
65°	139.7
67.5°	107.3
70°	79.0
72.5°	52.6
75°	32.4
77.5°	14.2
80°	4.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)