

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P205419

Luminaire Tested: **LD6B40D010 EU6B30508027 6LBSLI1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P205419  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LD6B40D010 EU6B30508027 6LBSLI1  
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT  
SHALLOW DISTRIBUTION WITH SPECULAR CLEAR TRIM  
WATTAGE D010TR-43.02 W DE010-42.54 W D5LT-42.539 W DMX-41.87 W DL2-41.57  
W DL3-44.71 W DLE-39.33 W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4308.4 lumens  
Efficiency: N/A  
Efficacy: 103.1 lumens/watt  
Spacing Criteria (0/90/45): 0.91 / 0.91 / 1.04  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 41.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P205419

CATALOG NUMBER: LD6B40D010 EU6B30508027 6LBSLI1

### Luminous Intensity Polar Plot

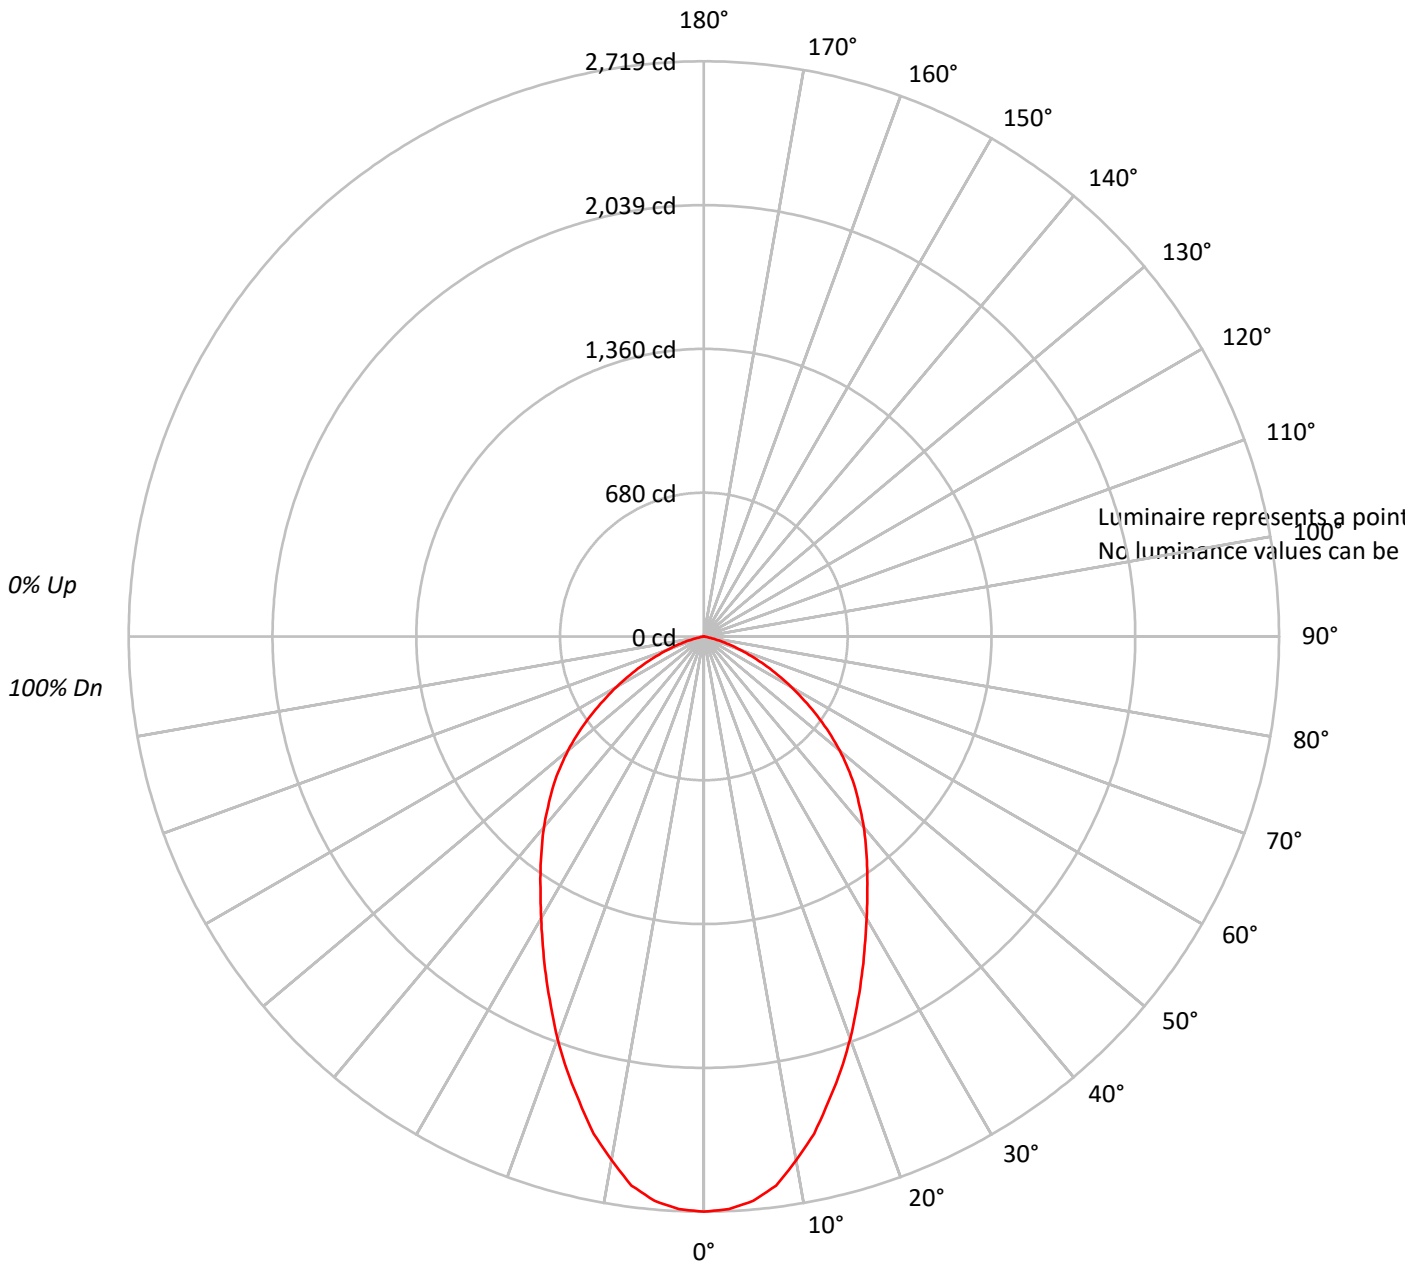



TEST NUMBER: P205419

CATALOG NUMBER: LD6B40D010 EU6B30508027 6LBSLI1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |   |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|---|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |    |    |   |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |     | 30  |     |     |     | 10  |     |    | 0  |   |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30 | 10 | 0 |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |   |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |    |    |   |
| 1   | 111 | 107 | 104 | 101 | 109 | 105 | 102 | 99  | 101 | 99  | 96  | 97  | 95  | 93  | 94  | 92  | 91  | 89  |    |    |   |
| 2   | 103 | 96  | 91  | 86  | 100 | 94  | 89  | 85  | 91  | 87  | 83  | 88  | 84  | 81  | 85  | 82  | 79  | 77  |    |    |   |
| 3   | 95  | 86  | 79  | 74  | 93  | 85  | 78  | 73  | 82  | 76  | 72  | 79  | 75  | 71  | 77  | 73  | 70  | 68  |    |    |   |
| 4   | 88  | 78  | 70  | 64  | 86  | 77  | 69  | 64  | 74  | 68  | 63  | 72  | 67  | 62  | 70  | 65  | 62  | 60  |    |    |   |
| 5   | 82  | 71  | 63  | 57  | 80  | 70  | 62  | 57  | 67  | 61  | 56  | 66  | 60  | 55  | 64  | 59  | 55  | 53  |    |    |   |
| 6   | 76  | 64  | 56  | 51  | 74  | 63  | 56  | 51  | 62  | 55  | 50  | 60  | 54  | 50  | 59  | 53  | 49  | 47  |    |    |   |
| 7   | 71  | 59  | 51  | 46  | 70  | 58  | 51  | 45  | 57  | 50  | 45  | 55  | 49  | 45  | 54  | 49  | 45  | 43  |    |    |   |
| 8   | 67  | 54  | 47  | 41  | 65  | 54  | 46  | 41  | 52  | 46  | 41  | 51  | 45  | 41  | 50  | 45  | 41  | 39  |    |    |   |
| 9   | 63  | 50  | 43  | 38  | 61  | 50  | 43  | 38  | 49  | 42  | 38  | 48  | 42  | 37  | 47  | 41  | 37  | 36  |    |    |   |
| 10  | 59  | 47  | 40  | 35  | 58  | 46  | 39  | 35  | 45  | 39  | 35  | 45  | 39  | 34  | 44  | 38  | 34  | 33  |    |    |   |

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P205419

CATALOG NUMBER: LD6B40D010 EU6B30508027 6LBSLI1

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 250.5  | 5.8       |
| 10°-20°   | 637.8  | 14.8      |
| 20°-30°   | 813.3  | 18.9      |
| 30°-40°   | 843.5  | 19.6      |
| 40°-50°   | 777.2  | 18.0      |
| 50°-60°   | 584.6  | 13.6      |
| 60°-70°   | 315.6  | 7.3       |
| 70°-80°   | 84.7   | 2.0       |
| 80°-90°   | 1.2    | 0.0       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 1701.7 | 39.5      |
| 0°-40°    | 2545.1 | 59.1      |
| 0°-60°    | 3906.9 | 90.7      |
| 0°-90°    | 4308.4 | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 4308.4 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 2719 |      |
| 5°  | 2678 | 251  |
| 15° | 2275 | 638  |
| 25° | 1767 | 813  |
| 35° | 1346 | 843  |
| 45° | 1012 | 777  |
| 55° | 654  | 585  |
| 65° | 316  | 316  |
| 75° | 73   | 85   |
| 85° | 0    | 1    |
| 90° | 0    |      |



TEST NUMBER: P205419

CATALOG NUMBER: LD6B40D010 EU6B30508027 6LBSL11

**CANDELA DISTRIBUTION (FULL):**

|       | 0°     |
|-------|--------|
| 0°    | 2718.8 |
| 2.5°  | 2709.7 |
| 5°    | 2677.6 |
| 7.5°  | 2618.1 |
| 10°   | 2512.8 |
| 12.5° | 2407.6 |
| 15°   | 2274.8 |
| 17.5° | 2151.3 |
| 20°   | 2023.1 |
| 22.5° | 1890.4 |
| 25°   | 1766.8 |
| 27.5° | 1647.8 |
| 30°   | 1537.9 |
| 32.5° | 1437.2 |
| 35°   | 1345.7 |
| 37.5° | 1258.7 |
| 40°   | 1176.3 |
| 42.5° | 1089.4 |
| 45°   | 1011.5 |
| 47.5° | 924.6  |
| 50°   | 837.6  |
| 52.5° | 746.1  |
| 55°   | 654.5  |
| 57.5° | 563.0  |
| 60°   | 476.0  |
| 62.5° | 393.6  |
| 65°   | 315.8  |
| 67.5° | 242.6  |
| 70°   | 178.5  |
| 72.5° | 123.6  |
| 75°   | 73.2   |
| 77.5° | 32.0   |
| 80°   | 9.2    |
| 82.5° | 0.0    |
| 85°   | 0.0    |
| 87.5° | 0.0    |
| 90°   | 0.0    |



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)