

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P205015

Luminaire Tested: **LD6B40D010 EU6B30508030 6LBCSMMS1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P205015
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD6B40D010 EU6B30508030 6LBCSMMS1
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT
SHALLOW DISTRIBUTION WITH CAST MATTE METALLIC SILVER TRIM
WATTAGE D010TR-43.02 W DE010-42.54 W D5LT-42.539 W DMX-41.87 W DL2-41.57
W DL3-44.71 W DLE-39.33 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4296.7 lumens
Efficiency: N/A
Efficacy: 102.8 lumens/watt
Spacing Criteria (0/90/45): 1.16 / 1.16 / 1.27
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 41.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P205015

CATALOG NUMBER: LD6B40D010 EU6B30508030 6LBCSMMS1

Luminous Intensity Polar Plot

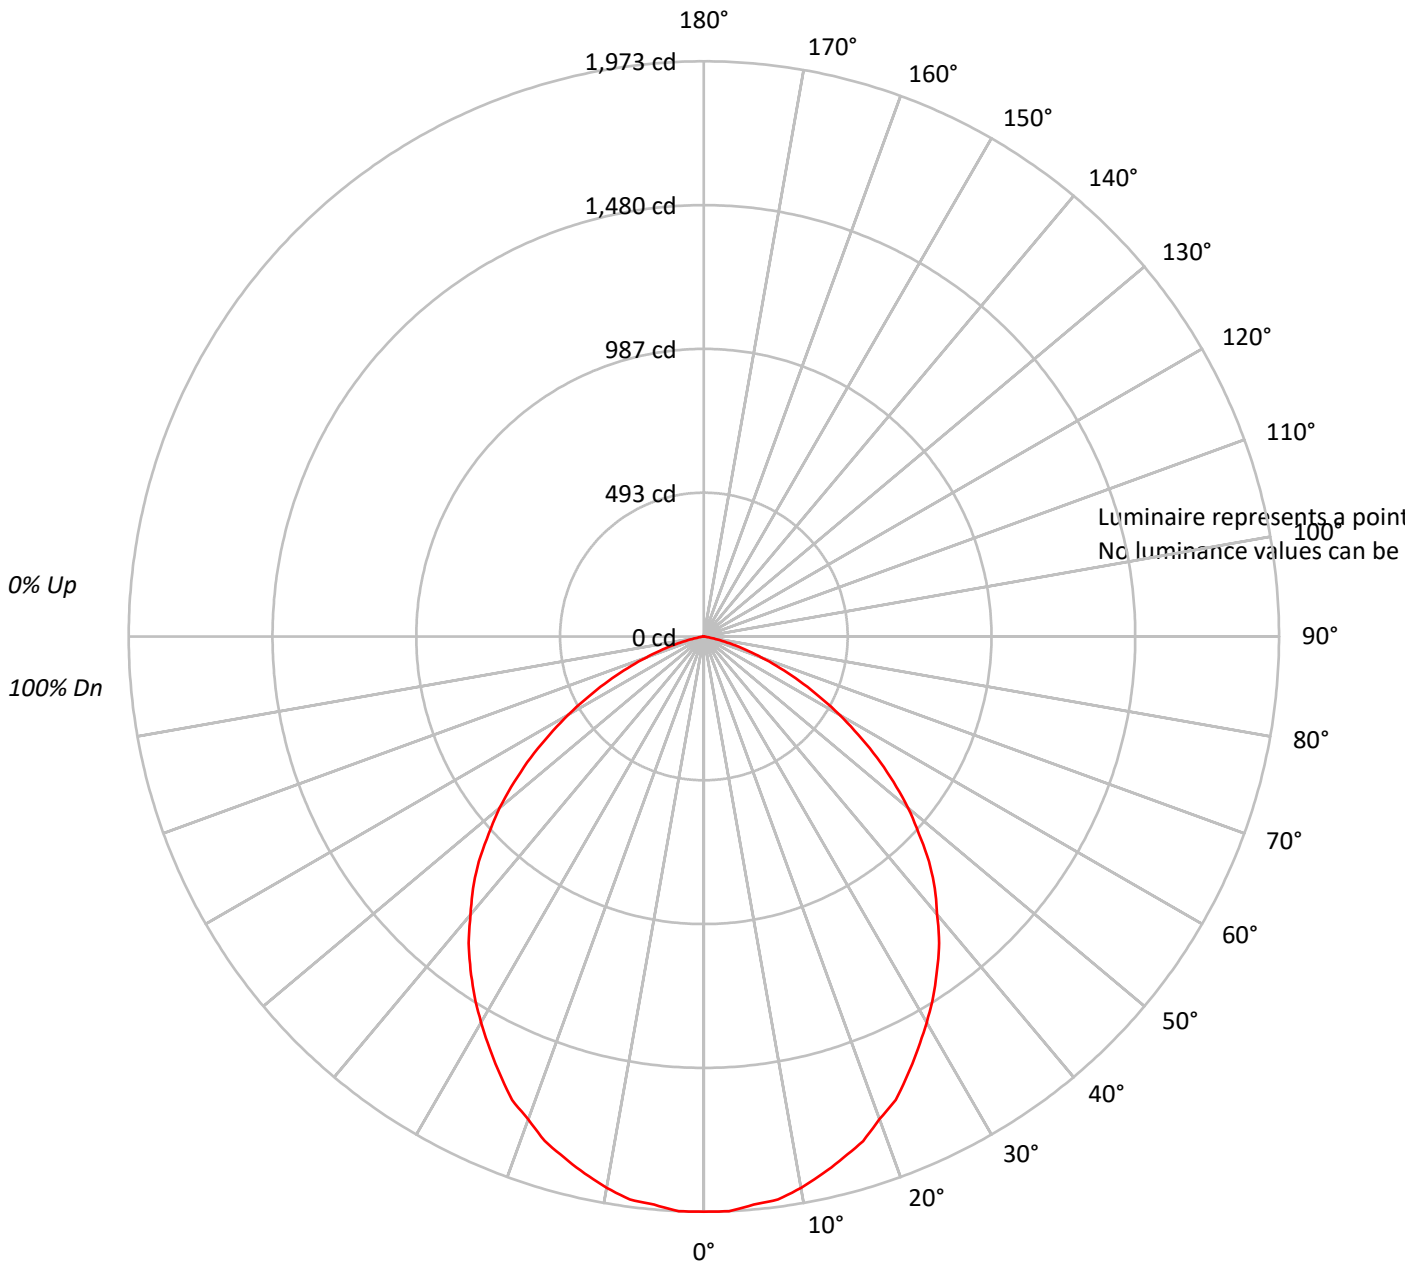



TEST NUMBER: P205015

CATALOG NUMBER: LD6B40D010 EU6B30508030 6LBCSMMS1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	111	107	103	100	108	105	101	98	100	98	95	97	94	92	93	91	90	88	88	88	88
2	102	95	89	84	99	93	88	83	90	85	81	86	83	79	83	80	78	76	76	76	76
3	94	85	77	72	92	83	76	71	80	74	70	77	73	69	75	71	67	65	65	65	65
4	87	76	68	62	84	74	67	61	72	66	61	70	64	60	68	63	59	57	57	57	57
5	80	68	60	54	78	67	59	54	65	58	53	63	57	53	61	56	52	50	50	50	50
6	74	62	54	48	72	61	53	47	59	52	47	58	51	47	56	51	46	44	44	44	44
7	69	56	48	42	67	56	48	42	54	47	42	53	46	42	51	46	41	40	40	40	40
8	64	52	44	38	63	51	43	38	50	43	38	48	42	38	47	42	37	36	36	36	36
9	60	48	40	35	59	47	40	34	46	39	34	45	39	34	44	38	34	32	32	32	32
10	57	44	36	31	55	43	36	31	43	36	31	42	35	31	41	35	31	29	29	29	29

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P205015

CATALOG NUMBER: LD6B40D010 EU6B30508030 6LBCSMMS1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	186.0	4.3
10°-20°	521.8	12.1
20°-30°	762.1	17.7
30°-40°	871.6	20.3
40°-50°	837.7	19.5
50°-60°	646.9	15.1
60°-70°	361.1	8.4
70°-80°	105.1	2.4
80°-90°	4.5	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1469.8	34.2
0°-40°	2341.5	54.5
0°-60°	3826.1	89.0
0°-90°	4296.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4296.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1973	
5°	1956	186
15°	1851	522
25°	1656	762
35°	1395	872
45°	1092	838
55°	725	647
65°	361	361
75°	92	105
85°	3	5
90°	0	



TEST NUMBER: P205015

CATALOG NUMBER: LD6B40D010 EU6B30508030 6LBCSMMS1

CANDELA DISTRIBUTION (FULL):

	0°
0°	1973.2
2.5°	1973.2
5°	1956.5
7.5°	1948.2
10°	1920.4
12.5°	1887.0
15°	1850.9
17.5°	1814.8
20°	1762.0
22.5°	1720.3
25°	1656.3
27.5°	1592.4
30°	1528.5
32.5°	1464.6
35°	1395.1
37.5°	1325.6
40°	1245.0
42.5°	1172.8
45°	1092.2
47.5°	1000.5
50°	914.3
52.5°	819.8
55°	725.3
57.5°	628.1
60°	536.4
62.5°	444.7
65°	361.3
67.5°	283.5
70°	211.2
72.5°	147.3
75°	91.7
77.5°	47.2
80°	16.7
82.5°	5.6
85°	2.8
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)