

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P204706

Luminaire Tested: **LD6B40D010 EU6B30508030 6LBPSMW1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P204706  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LD6B40D010 EU6B30508030 6LBPSMW1  
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT  
SHALLOW DISTRIBUTION WITH PLASTIC MATTE WHITE TRIM  
WATTAGE D010TR-43.02 W DE010-42.54 W D5LT-42.539 W DMX-41.87 W DL2-41.57  
W DL3-44.71 W DLE-39.33 W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4537.3 lumens  
Efficiency: N/A  
Efficacy: 108.5 lumens/watt  
Spacing Criteria (0/90/45): 1.24 / 1.24 / 1.34  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 41.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P204706

CATALOG NUMBER: LD6B40D010 EU6B30508030 6LBPSMW1

### Luminous Intensity Polar Plot

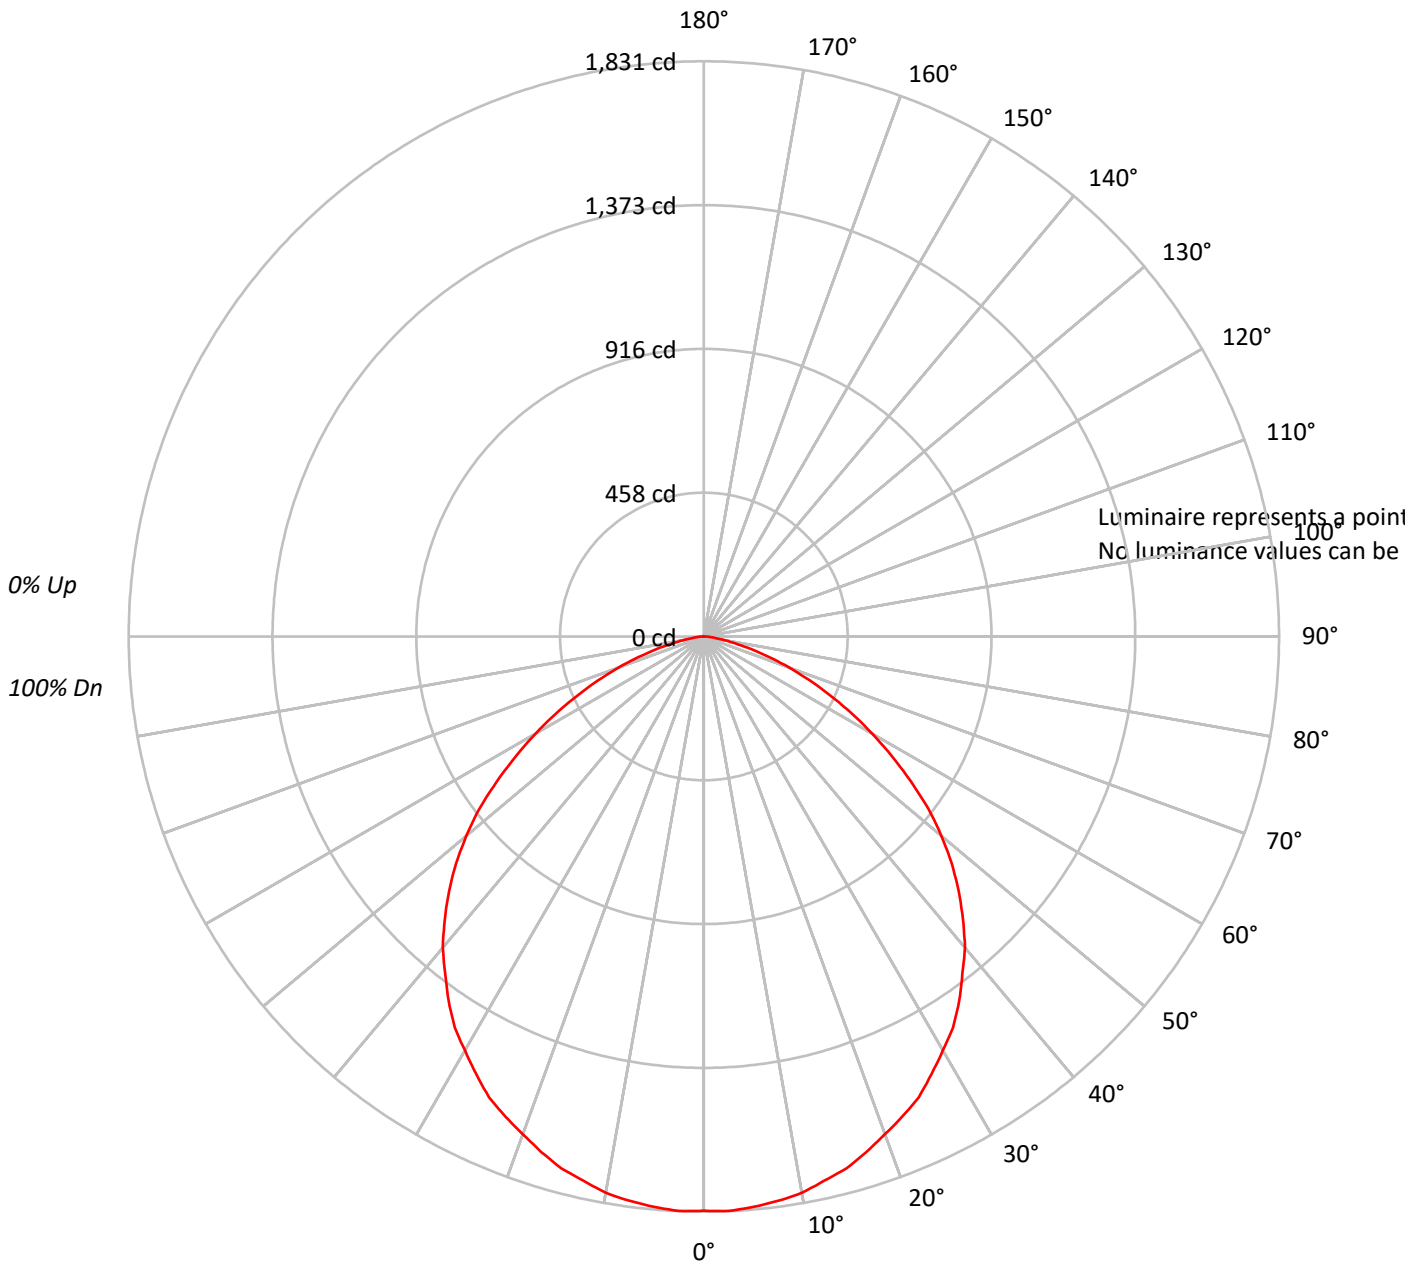



TEST NUMBER: P204706

CATALOG NUMBER: LD6B40D010 EU6B30508030 6LBPSMW1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	110	106	102	99	107	104	100	97	99	97	94	96	93	91	92	90	88	86			
2	101	93	87	82	98	92	86	81	88	83	79	85	81	77	82	79	76	74			
3	93	83	75	69	90	81	74	69	78	72	67	76	70	66	73	69	65	63			
4	85	74	66	59	83	72	65	59	70	63	58	68	62	57	66	61	56	54			
5	78	66	58	51	76	65	57	51	63	56	51	61	55	50	59	54	49	47			
6	73	60	51	45	71	59	51	45	57	50	44	55	49	44	54	48	44	42			
7	67	54	46	40	66	54	46	40	52	45	40	51	44	39	49	43	39	37			
8	63	50	41	36	61	49	41	36	48	41	35	46	40	35	45	39	35	33			
9	59	46	38	32	57	45	37	32	44	37	32	43	36	32	42	36	32	30			
10	55	42	34	29	54	42	34	29	41	34	29	40	33	29	39	33	29	27			

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P204706

CATALOG NUMBER: LD6B40D010 EU6B30508030 6LBPSMW1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	173.2	3.8
10°-20°	493.7	10.9
20°-30°	743.6	16.4
30°-40°	884.8	19.5
40°-50°	883.2	19.5
50°-60°	718.2	15.8
60°-70°	441.9	9.7
70°-80°	171.2	3.8
80°-90°	27.4	0.6
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1410.6	31.1
0°-40°	2295.4	50.6
0°-60°	3896.8	85.9
0°-90°	4537.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4537.3	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1828	
5°	1823	173
15°	1753	494
25°	1618	744
35°	1417	885
45°	1148	883
55°	804	718
65°	444	442
75°	156	171
85°	22	27
90°	0	



TEST NUMBER: P204706

CATALOG NUMBER: LD6B40D010 EU6B30508030 6LBPSMW1

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1828.1
2.5°	1830.8
5°	1822.7
7.5°	1812.0
10°	1798.5
12.5°	1774.3
15°	1752.8
17.5°	1720.6
20°	1685.6
22.5°	1653.4
25°	1618.4
27.5°	1570.0
30°	1521.6
32.5°	1475.9
35°	1416.8
37.5°	1352.3
40°	1293.1
42.5°	1220.5
45°	1147.9
47.5°	1070.0
50°	986.6
52.5°	900.6
55°	803.8
57.5°	709.7
60°	618.3
62.5°	529.6
65°	443.6
67.5°	362.9
70°	287.7
72.5°	217.8
75°	155.9
77.5°	102.2
80°	61.8
82.5°	37.6
85°	21.5
87.5°	10.8
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)