

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P203263

Luminaire Tested: **LD6B40D010 EU6B30508035 6LBMH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P203263
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD6B40D010 EU6B30508035 6LBMH1
Description: PORTFOLIO 6 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT
MEDIUM DISTRIBUTION WITH SEMI-SPECULAR CLEAR TRIM
WATTAGE D010TR-43.02 W DE010-42.54 W D5LT-42.539 W DMX-41.87 W DL2-41.57
W DL3-44.71 W DLE-39.33 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3129.3 lumens
Efficiency: N/A
Efficacy: 74.9 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.93
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 41.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P203263

CATALOG NUMBER: LD6B40D010 EU6B30508035 6LBMH1

Luminous Intensity Polar Plot

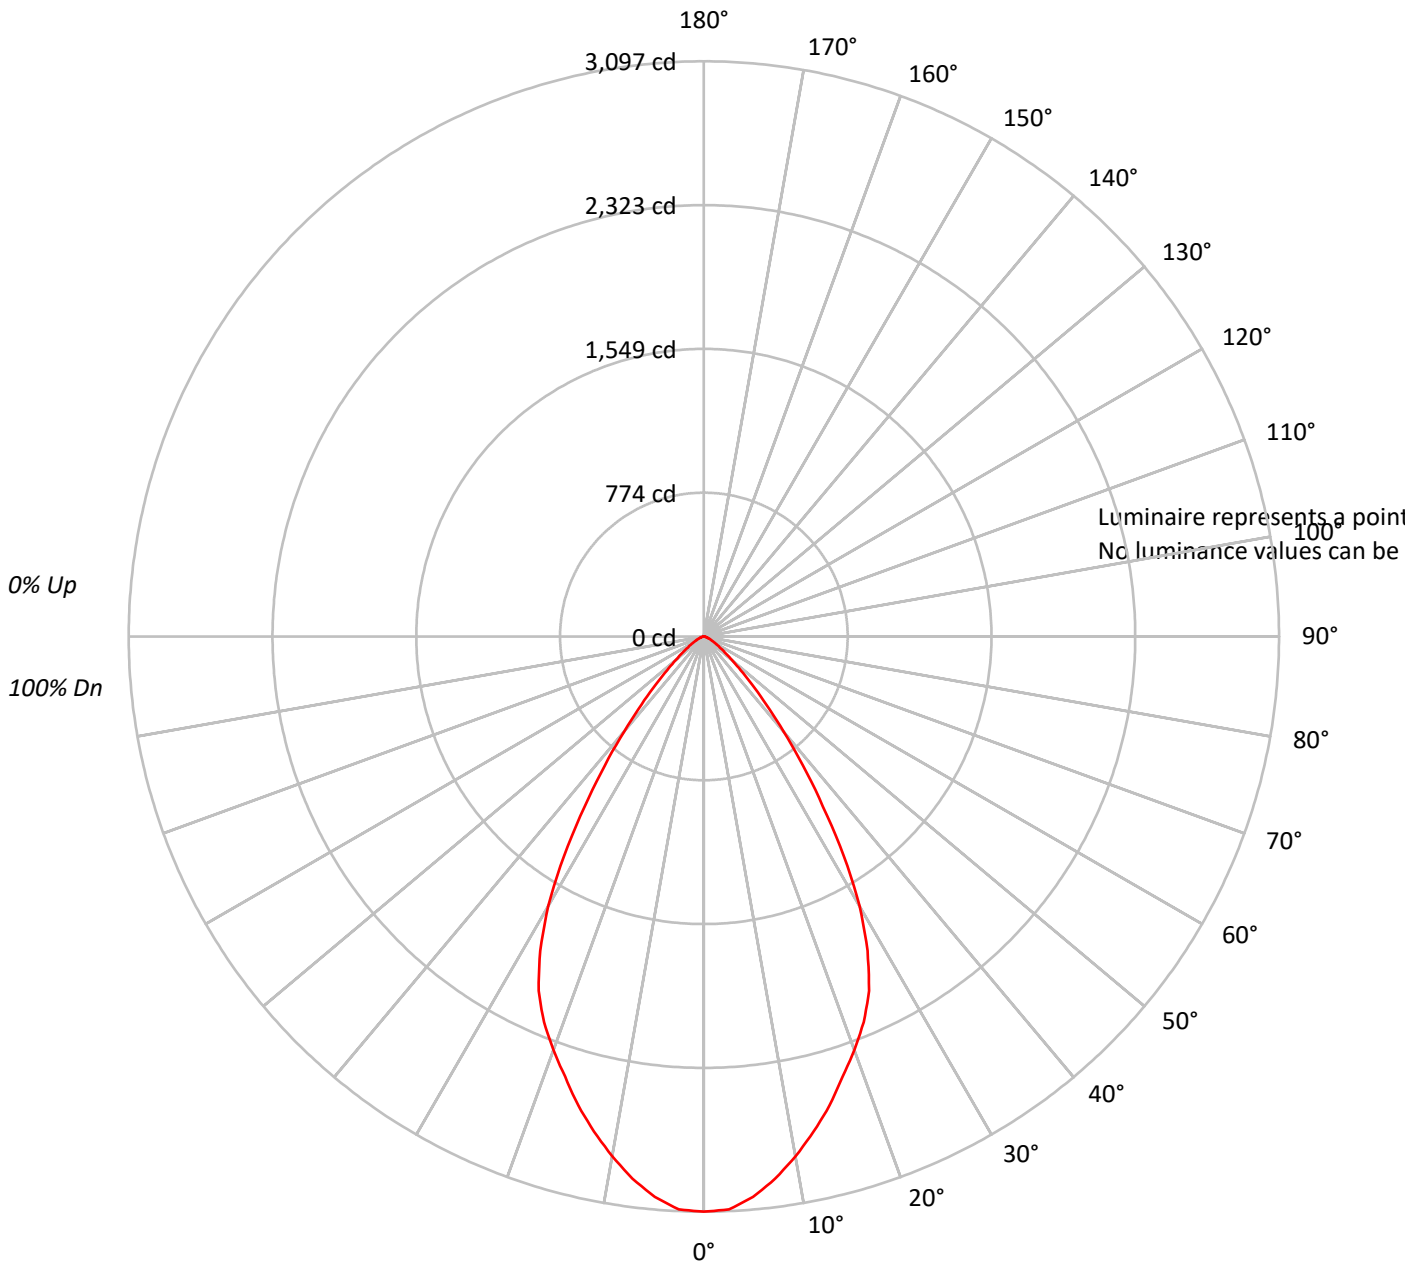



TEST NUMBER: P203263

CATALOG NUMBER: LD6B40D010 EU6B30508035 6LBMH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	92																			
2	107	102	97	93	105	100	96	92	97	93	90	94	91	88	91	89	87	85																			
3	101	94	88	84	99	92	87	84	90	86	82	87	84	81	85	82	80	78																			
4	95	87	81	76	93	86	80	76	84	79	75	82	78	74	80	76	73	72																			
5	90	81	75	70	88	80	74	70	78	73	69	76	72	68	75	71	68	66																			
6	85	75	69	64	83	75	69	64	73	68	64	72	67	63	70	66	63	61																			
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57																			
8	76	66	60	55	75	65	59	55	64	59	55	63	58	55	62	58	54	53																			
9	72	62	56	51	71	61	55	51	60	55	51	60	55	51	59	54	51	49																			
10	69	58	52	48	68	58	52	48	57	52	48	56	51	48	55	51	48	46																			

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P203263

CATALOG NUMBER: LD6B40D010 EU6B30508035 6LBMH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	283.2	9.0
10°-20°	732.5	23.4
20°-30°	949.2	30.3
30°-40°	704.7	22.5
40°-50°	297.5	9.5
50°-60°	105.6	3.4
60°-70°	40.8	1.3
70°-80°	14.1	0.5
80°-90°	1.8	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1964.8	62.8
0°-40°	2669.5	85.3
0°-60°	3072.6	98.2
0°-90°	3129.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3129.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3097	
5°	3030	283
15°	2614	733
25°	2105	949
35°	1117	705
45°	366	297
55°	112	106
65°	40	41
75°	13	14
85°	0	2
90°	0	



TEST NUMBER: P203263

CATALOG NUMBER: LD6B40D010 EU6B30508035 6LBMH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	3096.8
2.5°	3087.9
5°	3029.8
7.5°	2944.9
10°	2842.1
12.5°	2730.4
15°	2614.2
17.5°	2484.6
20°	2368.4
22.5°	2247.8
25°	2104.8
27.5°	1908.1
30°	1675.8
32.5°	1403.2
35°	1117.2
37.5°	875.9
40°	665.8
42.5°	496.0
45°	366.4
47.5°	268.1
50°	196.6
52.5°	147.5
55°	111.7
57.5°	84.9
60°	67.0
62.5°	49.2
65°	40.2
67.5°	31.3
70°	22.3
72.5°	17.9
75°	13.4
77.5°	8.9
80°	4.5
82.5°	4.5
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)