

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P204293

Luminaire Tested: **LD6B40D010 EU6B30508035 6LBSWH1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P204293  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LD6B40D010 EU6B30508035 6LBSWH1  
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT  
SHALLOW DISTRIBUTION WITH WHEAT TRIM  
WATTAGE D010TR-43.02 W DE010-42.54 W D5LT-42.539 W DMX-41.87 W DL2-41.57  
W DL3-44.71 W DLE-39.33 W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4483.1 lumens  
Efficiency: N/A  
Efficacy: 107.3 lumens/watt  
Spacing Criteria (0/90/45): 0.94 / 0.94 / 1.08  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 41.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P204293

CATALOG NUMBER: LD6B40D010 EU6B30508035 6LBSWH1

### Luminous Intensity Polar Plot

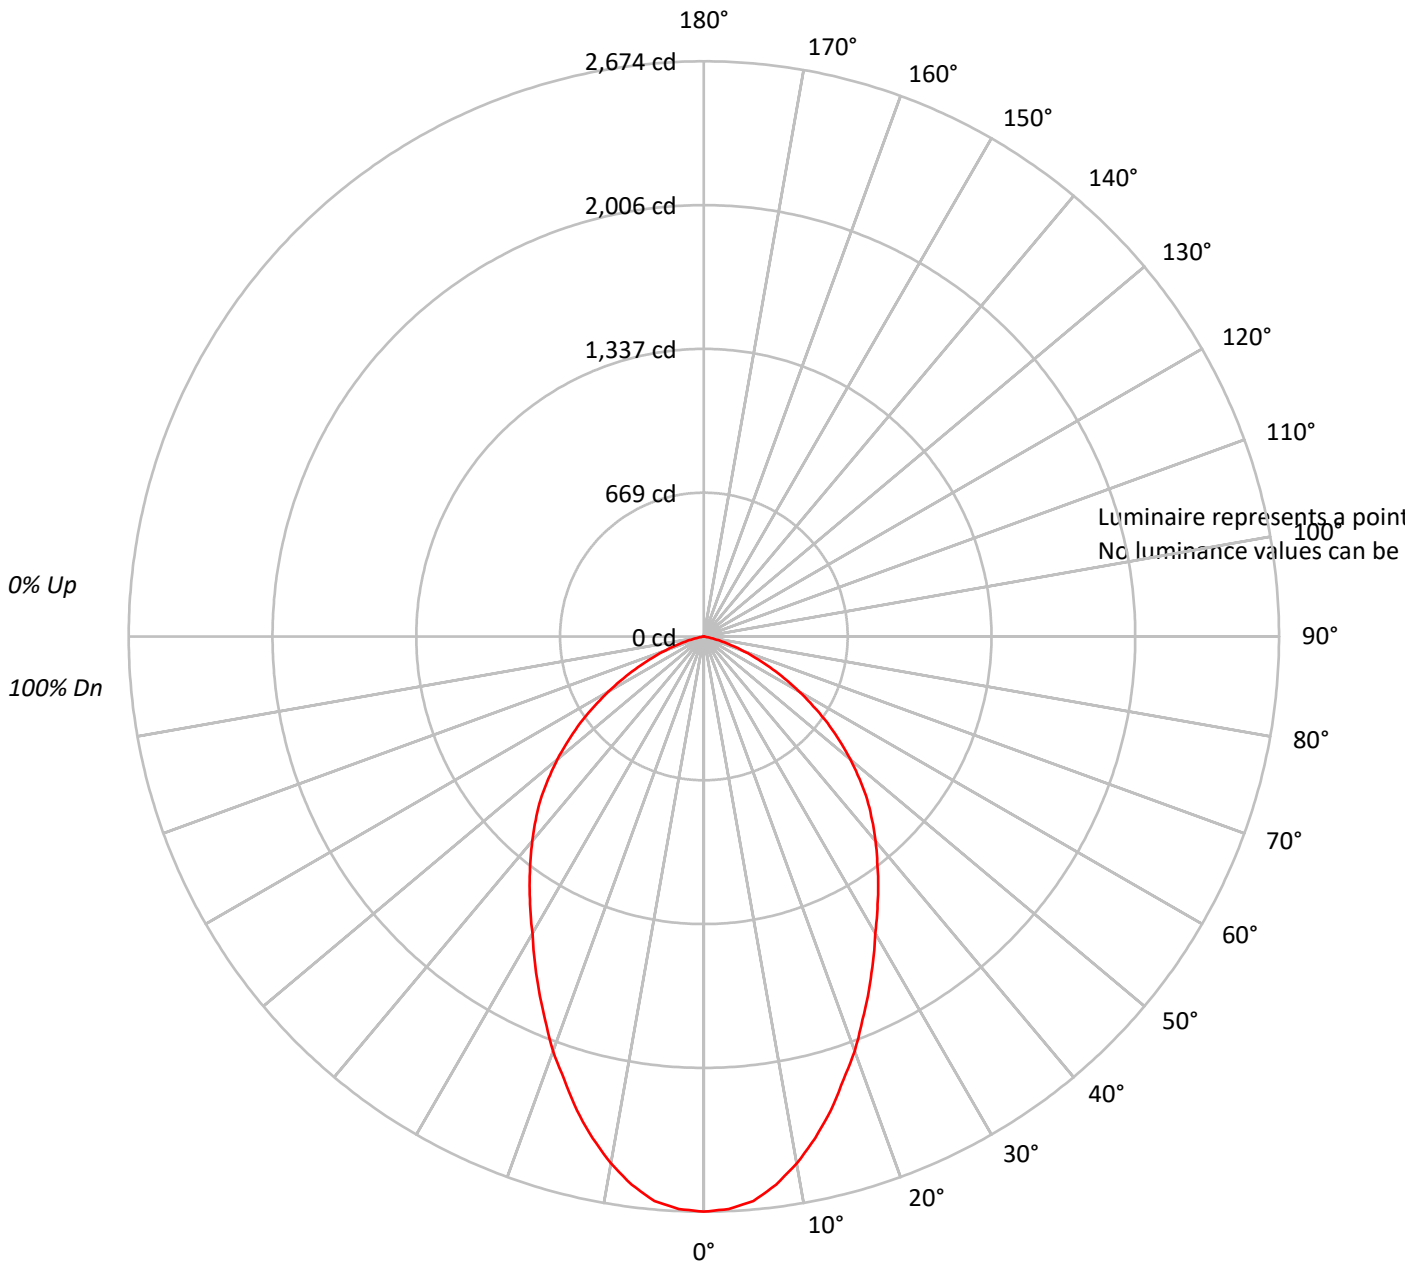



TEST NUMBER: P204293

CATALOG NUMBER: LD6B40D010 EU6B30508035 6LBSWH1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	111	107	104	101	108	105	102	99	101	98	96	97	95	93	94	92	90	89				89
2	103	96	90	85	100	94	89	84	91	86	83	87	84	81	85	82	79	77				77
3	95	86	79	73	93	84	78	73	82	76	72	79	74	70	76	73	69	67				67
4	88	77	70	64	86	76	69	63	74	68	63	72	66	62	69	65	61	59				59
5	81	70	62	56	79	69	62	56	67	60	55	65	59	55	63	58	54	52				52
6	76	64	56	50	74	63	55	50	61	54	49	60	54	49	58	53	49	47				47
7	71	58	51	45	69	58	50	45	56	49	45	55	49	44	54	48	44	42				42
8	66	54	46	41	65	53	46	41	52	45	40	51	45	40	50	44	40	38				38
9	62	50	42	37	61	49	42	37	48	41	37	47	41	37	46	41	37	35				35
10	58	46	39	34	57	46	39	34	45	38	34	44	38	34	43	38	34	32				32

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P204293

CATALOG NUMBER: LD6B40D010 EU6B30508035 6LBSWH1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	246.6	5.5
10°-20°	638.3	14.2
20°-30°	834.9	18.6
30°-40°	884.0	19.7
40°-50°	824.5	18.4
50°-60°	624.5	13.9
60°-70°	338.2	7.5
70°-80°	90.7	2.0
80°-90°	1.3	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1719.7	38.4
0°-40°	2603.8	58.1
0°-60°	4052.8	90.4
0°-90°	4483.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4483.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2674	
5°	2634	247
15°	2281	638
25°	1815	835
35°	1413	884
45°	1074	825
55°	702	624
65°	338	338
75°	78	91
85°	0	1
90°	0	



TEST NUMBER: P204293

CATALOG NUMBER: LD6B40D010 EU6B30508035 6LBSWH1

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	2673.7
2.5°	2663.9
5°	2634.4
7.5°	2570.6
10°	2487.2
12.5°	2389.1
15°	2281.2
17.5°	2158.6
20°	2050.6
22.5°	1928.0
25°	1815.1
27.5°	1702.3
30°	1594.4
32.5°	1501.2
35°	1412.9
37.5°	1324.6
40°	1241.2
42.5°	1157.8
45°	1074.4
47.5°	981.2
50°	888.0
52.5°	794.7
55°	701.5
57.5°	603.4
60°	510.2
62.5°	421.9
65°	338.5
67.5°	260.0
70°	191.3
72.5°	132.5
75°	78.5
77.5°	34.3
80°	9.8
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)