

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P204615

Luminaire Tested: **LD6B50D010TE EU6B30508030 6LBSMW1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P204615
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD6B50D010TE EU6B30508030 6LB5MW1
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT
SHALLOW DISTRIBUTION WITH MATTE WHITE TRIM
SINGLE DRIVER D010TE
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5805.2 lumens
Efficiency: N/A
Efficacy: 98.8 lumens/watt
Spacing Criteria (0/90/45): 1.24 / 1.24 / 1.34
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 58.77
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P204615

CATALOG NUMBER: LD6B50D010TE EU6B30508030 6LBSMW1

Luminous Intensity Polar Plot

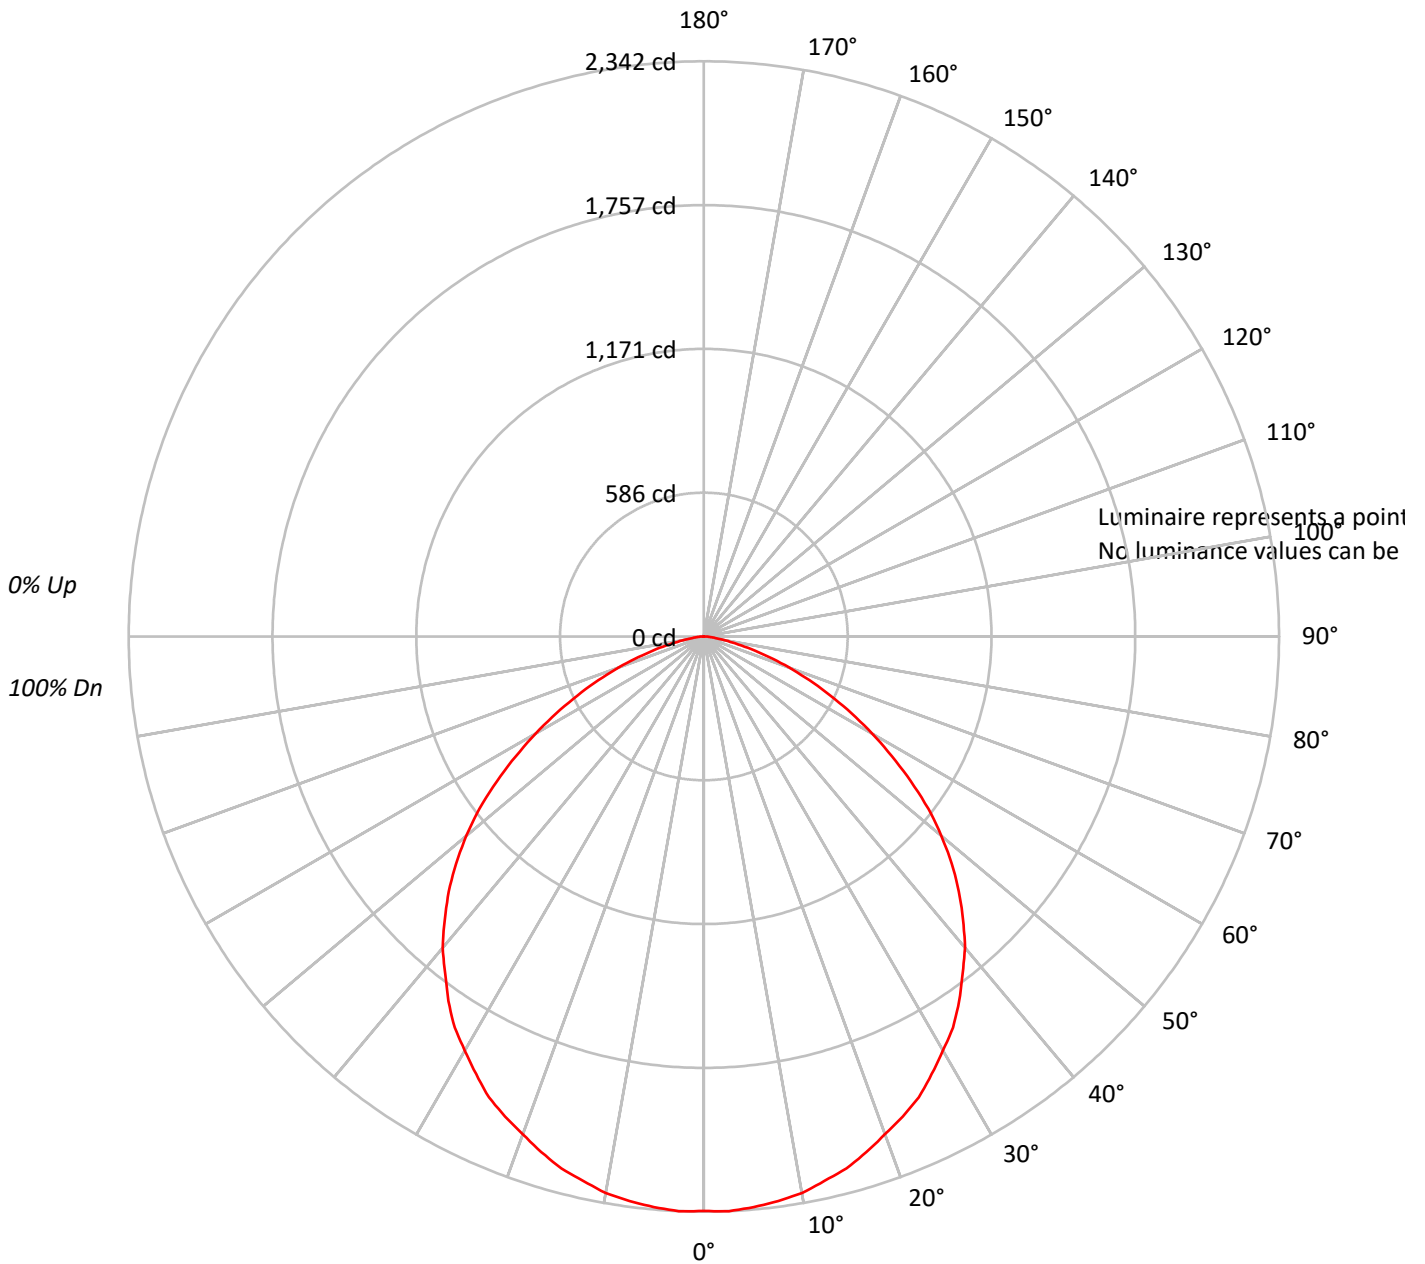



TEST NUMBER: P204615

CATALOG NUMBER: LD6B50D010TE EU6B30508030 6LB5MW1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	110	106	102	99	107	104	100	97	99	97	94	96	93	91	92	90	88	86			
2	101	93	87	82	98	92	86	81	88	83	79	85	81	77	82	79	76	74			
3	93	83	75	69	90	81	74	69	78	72	67	76	70	66	73	69	65	63			
4	85	74	66	59	83	72	65	59	70	63	58	68	62	57	66	61	56	54			
5	78	66	58	51	76	65	57	51	63	56	51	61	55	50	59	54	49	47			
6	73	60	51	45	71	59	51	45	57	50	44	55	49	44	54	48	44	42			
7	67	54	46	40	66	54	46	40	52	45	40	51	44	39	49	43	39	37			
8	63	50	41	36	61	49	41	36	48	41	35	46	40	35	45	39	35	33			
9	59	46	38	32	57	45	37	32	44	37	32	43	36	32	42	36	32	30			
10	55	42	34	29	54	42	34	29	41	34	29	40	33	29	39	33	29	27			

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P204615

CATALOG NUMBER: LD6B50D010TE EU6B30508030 6LBSMW1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	221.6	3.8
10°-20°	631.7	10.9
20°-30°	951.4	16.4
30°-40°	1132.1	19.5
40°-50°	1130.0	19.5
50°-60°	919.0	15.8
60°-70°	565.3	9.7
70°-80°	219.0	3.8
80°-90°	35.1	0.6
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1804.7	31.1
0°-40°	2936.8	50.6
0°-60°	4985.8	85.9
0°-90°	5805.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5805.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2339	
5°	2332	222
15°	2243	632
25°	2071	951
35°	1813	1132
45°	1469	1130
55°	1028	919
65°	568	565
75°	200	219
85°	28	35
90°	0	



TEST NUMBER: P204615

CATALOG NUMBER: LD6B50D010TE EU6B30508030 6LBSMW1

CANDELA DISTRIBUTION (FULL):

	0°
0°	2338.9
2.5°	2342.4
5°	2332.1
7.5°	2318.3
10°	2301.1
12.5°	2270.2
15°	2242.6
17.5°	2201.4
20°	2156.6
22.5°	2115.4
25°	2070.7
27.5°	2008.7
30°	1946.8
32.5°	1888.4
35°	1812.7
37.5°	1730.1
40°	1654.5
42.5°	1561.6
45°	1468.7
47.5°	1369.0
50°	1262.3
52.5°	1152.3
55°	1028.4
57.5°	908.1
60°	791.1
62.5°	677.6
65°	567.5
67.5°	464.3
70°	368.0
72.5°	278.6
75°	199.5
77.5°	130.7
80°	79.1
82.5°	48.2
85°	27.5
87.5°	13.8
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)